


PU series flat type isolation transformer



Model:PU3013B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).

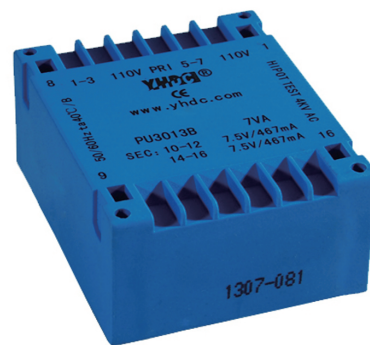

Technical Index:

Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30°C ~ +40°C
Work frequency: 50Hz ~ 60Hz
Dielectric strength: 4KV 50Hz 1min



Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤30	%
Power	8	VA
Temperature rising	≤20	°C
No load loss	≤0.7	W
weight	220	g

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	8.19V×2	667mA×2
7.5V×2	10.2V×2	533mA×2
9V×2	12.3V×2	444mA×2
12V×2	16.3V×2	333mA×2
15V×2	20.4V×2	267mA×2
18V×2	24.5V×2	222mA×2
24V×2	32.7V×2	167mA×2

Dimension (in mm) :

Schematic Diagram:

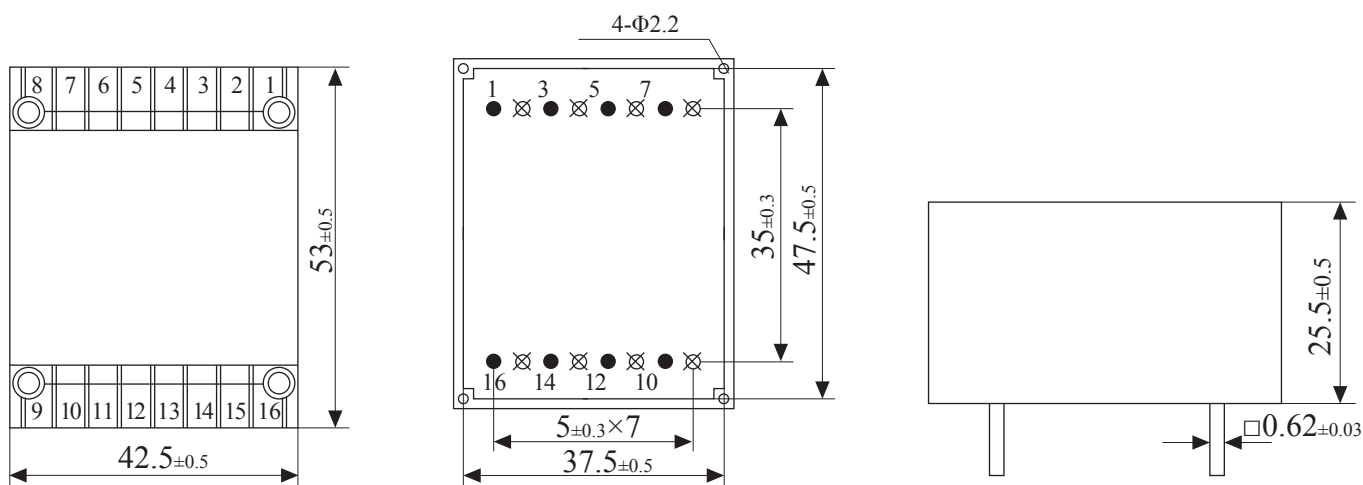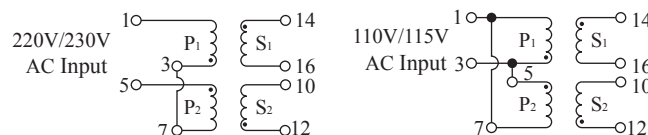

Top View

Bottom View

Side View