


XM-R1-WP Series

Miniature relay for heating mat 12V/230V



■ Features:

- Low coil power consumption
- Enclosed type design
- 15A current switching capacity
- IP class 67

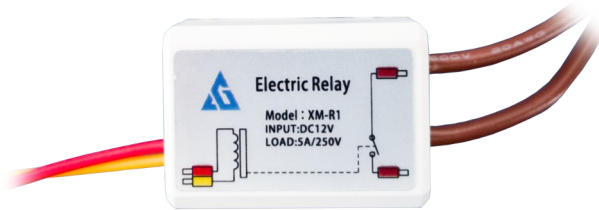

ELECTRICAL SPECIFICATION

MODEL	XM-R1-WP
INPUT	
COIL OPERATING VOLTAGE (MIN.)	12V DC
COIL VOLTAGE (MIN. / MAX.)	9V DC (at 23 ± 5°C) / 15.6V DC (130% of rated voltage)
RATED COIL CURRENT AND POWER	30mA DC ± 10% (at 23 ± 5°C) / 360mW

OUTPUT	
CONTACT RATING (NOM. / MAX.)	10A 250V AC / 15A 125V AC (resistive load)
OPERATE AND RELEASE TIME (MAX.)	15ms / 10ms
CONTACT CONFIGURATION	Single-pole NO contact (1 from a)
CONTACT RESISTANCE (MAX.)	100mΩ (at 6V DC / 1A)

OTHER	
INSULATION RESISTANCE (MIN.)	1000MΩ (at 500V DC)
DIELECTRIC STRENGTH (BETWEEN OPEN CONTACT)	750V AC, 50/60Hz (1 minute)
DIELECTRIC STRENGTH (BETWEEN CONTACTS AND COIL)	1500V AC, 50/60Hz (1 minute)

WORKING ENVIRONMENT	
OPERATING TEMPERATURE	+5 ± +50°C
STORAGE TEMPERATURE	-40 ± +85°C
STORAGE HUMIDITY	25 ± 85 %

SAFETY STANDARDS	
SAFETY STANDARDS	Compliance to EN61810-1:2008
IP CLASS	IP 67 (does not apply to cable end)

OTHER		
WIRES	Wire out: 20AWG, length = 175mm	Input wire: 22AWG, length = 175mm
DIMENSIONS	32 x 22.5 x 14 cm (L x W x H)	
NET WEIGHT	23.1g	

EAN CODE




5 902135 151389 >

XM-R1-WP Series

Miniature relay for heating mat 12V/230V



MECHANICAL SPECIFICATION

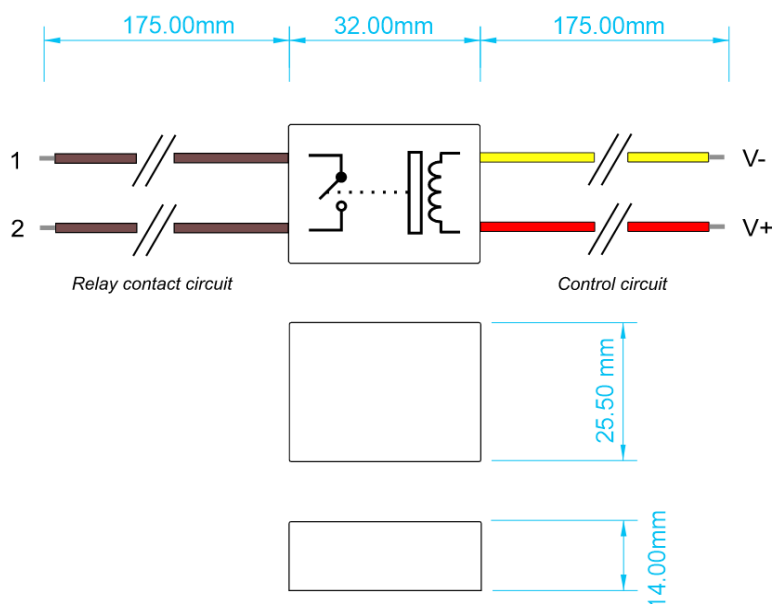

SAMPLE WIRING DIAGRAM

