




SERIA MA

- MULTIPROCESSORY STANDARDOWE
- MULTI ATTACHMENT PULVERIZER

		MA 15	MA 18	MA 25	MA 35	MA 50	MA 65	MA 130
body	kg.	875	1330	1680	2430	3560	4100	8600
H1	mm.	1060	1250	1360	1655	1560	1725	2250
max	bar	350	350	350	350	350	350	350
	l/min.	150 / 250	150 / 250	200 / 300	300 / 400	400 / 500	400 / 600	500 / 800
max	bar	140	140	140	140	140	140	140
	l/min.	20 / 40*	20 / 40*	25 / 50*	25 / 50*	25 / 50*	25 / 50*	80*
		/	/	/	/	✓	✓	✓


H = H1 + H2

*Podwójny silnik obrotu / *Double motor

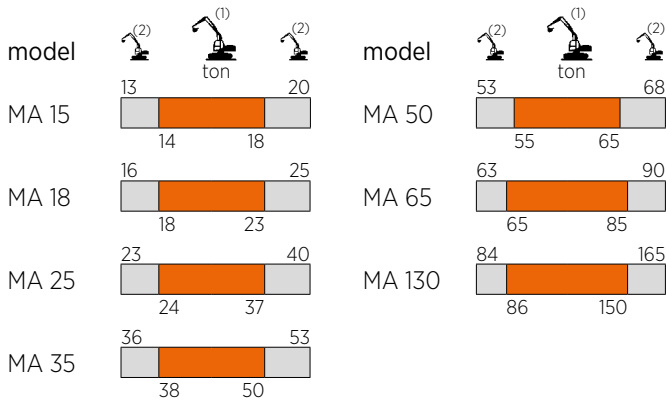


(1) Optymalna kombinacja koparka - osprzet
Optimum excavator - equipment combination

(2) Możliwa kombinacja koparka - osprzet
Possible excavator - equipment combination

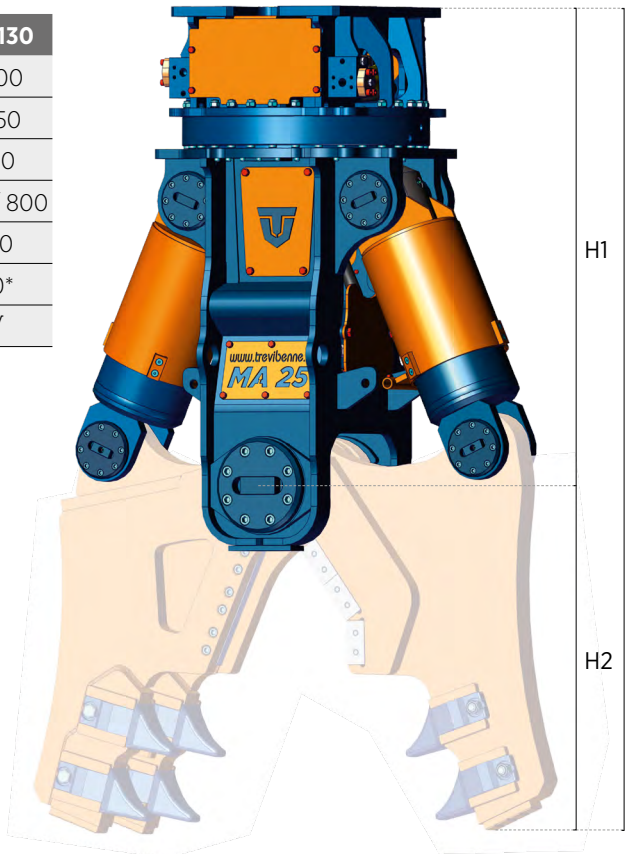

KIT CB		MA 15	MA 18	MA 25	MA 35	MA 50	MA 65	MA 130
	kg.	430	560	1020	1200	2060	2450	4220
A	mm.	700	740	860	1005	1280	1430	1940
B	mm.	710	790	905	960	1315	1440	1600
C	mm.	125	145	145	165	165	165	165
D	mm.	275	330	420	420	460	480	560
	mm.	350	350	375	525	525	525	660
H2	mm.	735	810	990	990	1340	1505	1590
Ø max	mm.	35	40	45	60	70	80	100
IPN max	mm.	/	/	/	/	/	/	/
HEA max	mm.	/	/	/	/	/	/	/
Lamiera max	mm.	/	/	/	/	/	/	/

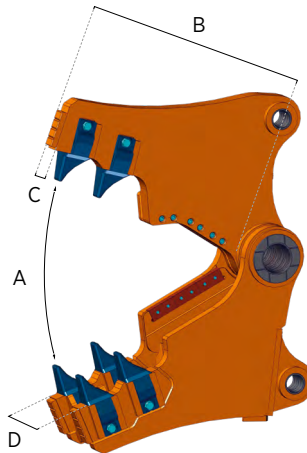


KIT CH		MA 15	MA 18	MA 25	MA 35	MA 50	MA 65	MA 130
	kg.	645	785	1145	1470	*	*	*
A	mm.	420	445	550	765	*	*	*
B	mm.	665	675	810	935	*	*	*
C	mm.	335	380	380	410	*	*	*
D	mm.	435	505	525	555	*	*	*
	mm.	390	450	620	750	*	*	*
H2	mm.	765	790	950	1055	*	*	*
Ø max	mm.	35	40	45	60	*	*	*
IPN max	mm.	/	/	/	/	*	*	*
HEA max	mm.	/	/	/	/	*	*	*
Lamiera max	mm.	/	/	/	/	*	*	*



KIT RS		MA 15	MA 18	MA 25	MA 35	MA 50	MA 65	MA 130
	kg.	*	*	740	*	*	*	*
A	mm.	*	*	240	*	*	*	*
B	mm.	*	*	250	*	*	*	*
C	mm.	*	*	120	*	*	*	*
D	mm.	*	*	340	*	*	*	*
	mm.	*	*	200	*	*	*	*
H2	mm.	*	*	375	*	*	*	*
Ø max	mm.	*	*	/	*	*	*	*
IPN max	mm.	*	*	/	*	*	*	*
HEA max	mm.	*	*	/	*	*	*	*
Lamiera max	mm.	*	*	12	*	*	*	*

*Dostępne na żądanie / *Available on request



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY

