


MAXICOMPACT® BLADE TYPE FUSE


MaxiCompact® fuses are compliant with ISO 8820-10 Standard (Type "L": high current miniature).

MaxiCompact® are made of Zinc alloy whose low melting temperature avoids heavy over temperatures.


Breaking capacity: 1000 A
Voltage rating: 32 Vdc
Ambient temperature: -40°C to +125°C

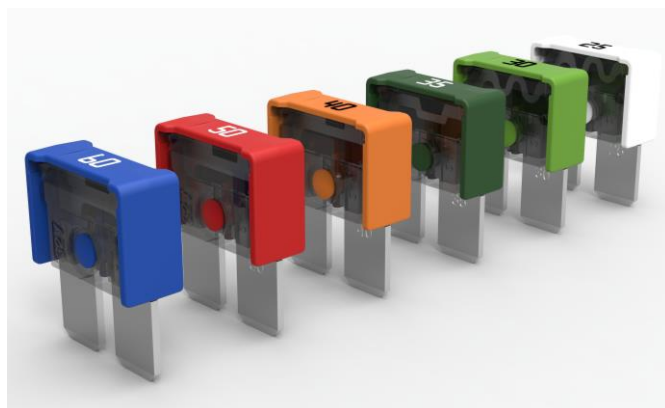


MTA/ISO MaxiCompact® operating time limits		
% I _R	min [s]	max [s]
100	360000	-
135	60	300
160	10	70
200	2	30
350	0,2	7
600	0,04	1

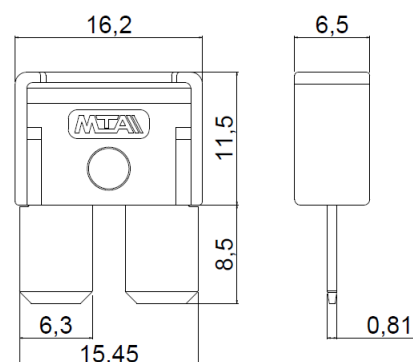

**MaxiCompact® Operating Time
@ 23°C test module ISO**

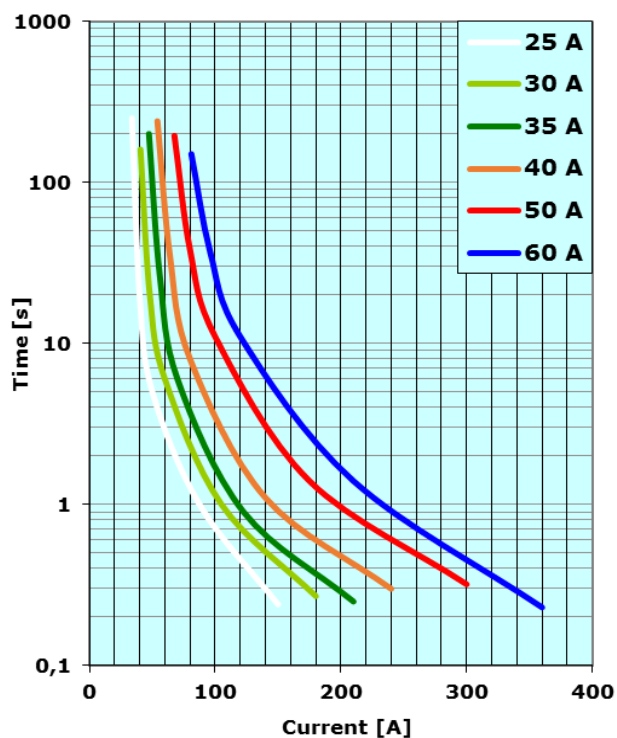

**MaxiCompact® Derating Curve
on test module ISO**

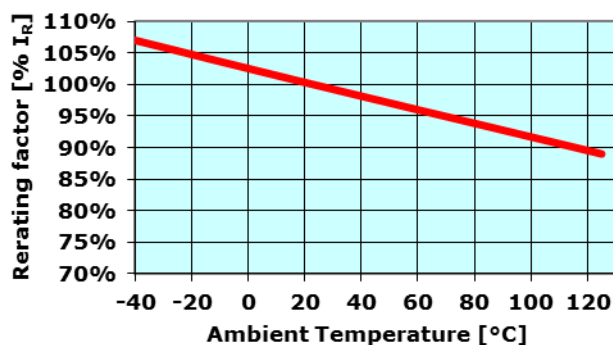

CURRENT RATING [A]	VOLTAGE DROP @ current rating [mV]	CABLE SIZE [mm ²]	I ² t* [A ² s]
25	< 125	2,5	4700
30	< 120	2,5	8000
35	< 120	4,0	9600
40	< 120	4,0	12000
50	< 120	6,0	20100
60	< 120	6,0	28200

*calculated from breaking capacity test