

Model:LKB6637-T

Characteristics:

Vacuum Epoxy Encapsulated,Crimp terminal output,Primary voltage:110V/220V/230V(or producing as customerized).




Technical Index:

- Mounting type: Sub-plate mount
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30℃~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: 3.5KV 50Hz 1min

Technical Parameters table:


Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤15	%
Power	60	VA
Temperature rising	≤40	℃
No load loss	≤1.5	W
weight	1000	g

Dimension（in mm）：

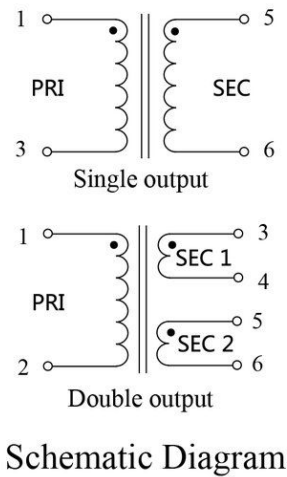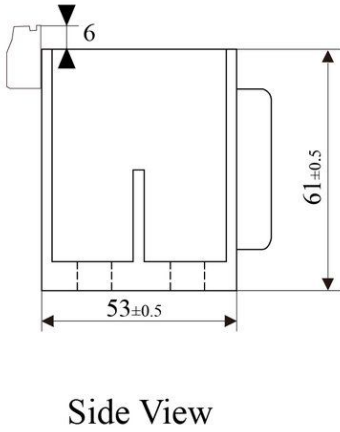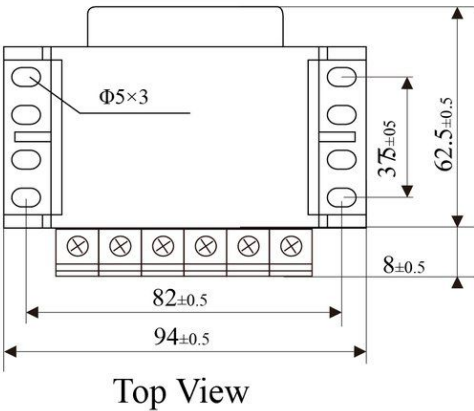

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	6.8V	6.8V×2	10A	5A×2
7.5V	7.5V×2	8.5V	8.5V×2	8A	4A×2
9V	9V×2	10.2V	10.2V×2	6.66A	3.33A×2
12V	12V×2	13.7V	13.7V×2	5A	2.5A×2
15V	15V×2	17.1V	17.1V×2	4A	2A×2
18V	18V×2	20.5V	20.5V×2	3.33A	1.67A×2
24V	24V×2	27.3V	27.3V×2	2.5A	1.25A×2

Connector Illustration:

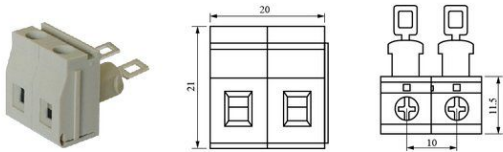

Embedded transformer dedicated crimp terminal,Spacing 10mm, Current 20A