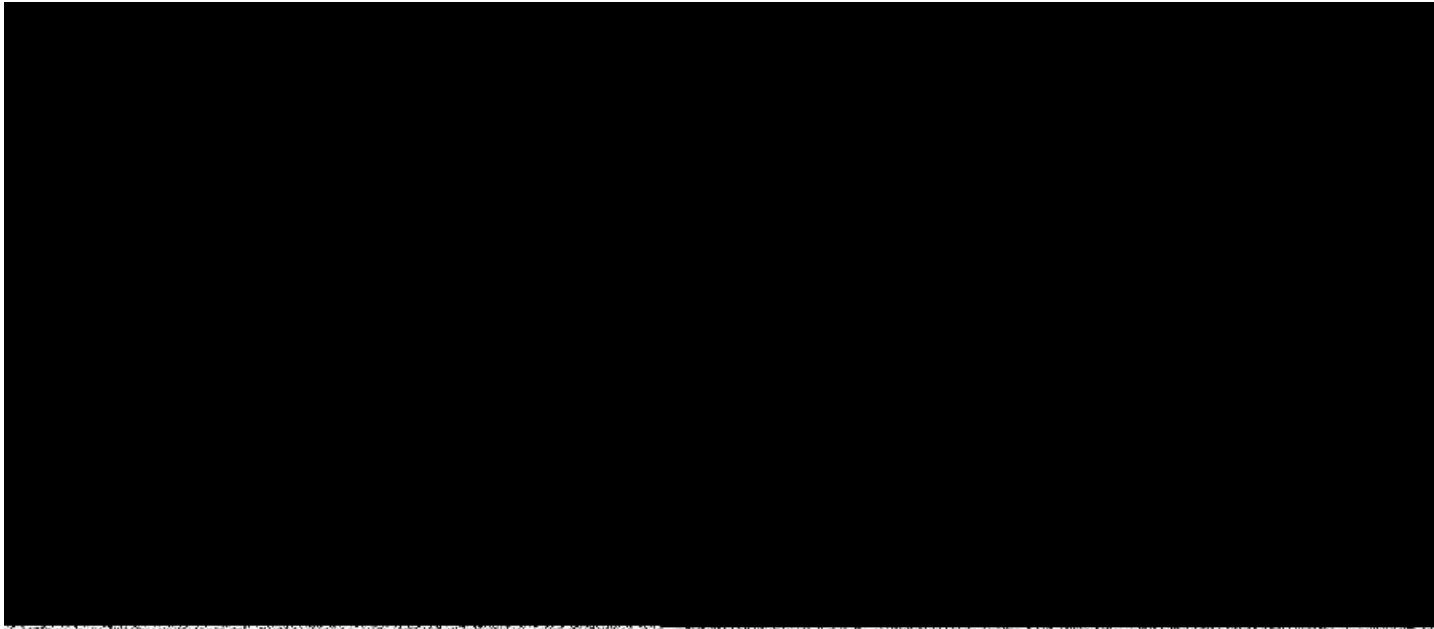
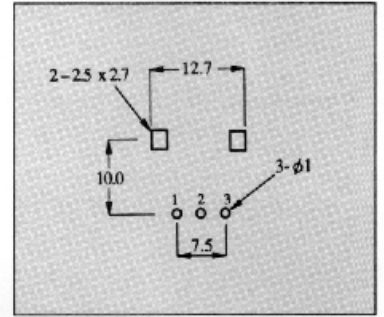
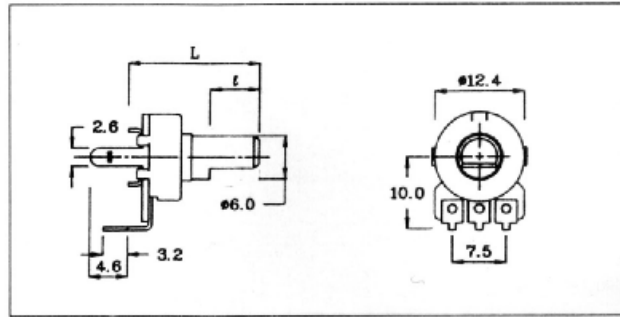







# RV 121NP(H)



RV 121GNP	L	10	15	20	25
		/	7	12	12
RV 121GNP(H)	L	15	20	25	30
		/	7	12	12

L	10	15	20	25
	5	10	15	15

L	15	20	25	30
	5	10	15	15

# SPECIFICATIONS 特性

ELECTRICAL 電器特性				
RESISTANCE RANGE 阻值範圍	5K $\Omega$ - 500K $\Omega$			
RESISTANCE TOLERANCE 阻值誤差	$\pm$ 20%			
RESISTANCE TAPER 電阻規律	A. B. C. D. W			
RESIDUAL RESISTANCE 殘留電阻 Between Terminal 1 & 2 Between Terminal 2 & 3	SINGLE	10 $\Omega$ /10 $\Omega$		
	DUAL	25 $\Omega$ /25 $\Omega$		
POWER RATING (W) 額定功率	Travel Taper	SINGLE	DUAL	
	B	0.05W	0.025W	
	Except B	0.05W	0.025W	
INSULATION RESISTANCE 絕緣電阻	SINGLE	100M $\Omega$ at 250V DC		
	DUAL	50M $\Omega$ at 250V DC		
WITHSTAND VOLTAGE 耐電壓	SINGLE	1 Min at 300V AC		
	DUAL	1 Min at 300V AC		

MECHANICAL 機械特性	
ROTATION ANGLE 旋轉角	300° $\pm$ 6°
ROTATIONAL TORQUE 旋轉力矩	10 - 200 gf. cm
CLICK FORCE 定位阻力	50 - 200 gf. cm
STOP STRENGTH 止擋強度	4 Kgf. cm
PUSH - PULL STRENGTH 推拉強度	5 Kgf
SHAFT WOBBLE 轉軸振幅	0.5 - 1.1mm
SHAFT BENDING 轉軸偏心	0.35mm
ROTATIONAL NOISE 轉動噪音	47 (Mv)

DURABILITY 耐用性	
ROTATIONAL LIFE 旋轉壽命	10,000 Cycles

OUTPUT VOLT ACROSS TERM 2 - 3  
INPUT VOLT ACROSS TERM 1 - 3  
x 100%

