


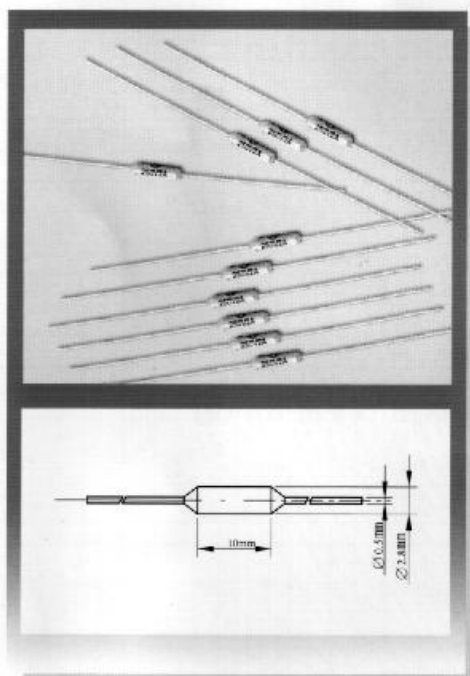

RH03B

目录编号 Catalog No.	额定 动作温度 Rated Functioning Temp. T _f (°C)	实际 动作温度 Fusing-Off Temp. (°C)	保持温度 Holding T _c (°C)	极限温度 Max Temp. Limit T _m (°C)	额定电压 Voltage A _c (V)	额定电流 Current (A)
RH03B-75	75	72+3/-2	40	150	250	2, 3
RH03B-80	80	75 ± 3	50	150	250	2, 3
RH03B-85	85	83+2/-3	50	150	250	2, 3
RH03B-90	90	88+2/-4	55	150	250	2, 3
RH03B-95	95	92+2/-4	65	150	250	2, 3
RH03B-100	100	97+2/-3	70	150	250	2, 3
RH03B-105	105	100+3/-4	75	180	250	2, 3
RH03B-110	110	105 ± 4	80	180	250	2, 3
RH03B-115	115	110+5/-3	80	180	250	2, 3
RH03B-120	120	115 ± 4	80	180	250	2, 3
RH03B-125	125	120 ± 4	95	180	250	2, 3
RH03B-130	130	127+3/-4	100	180	250	2, 3
RH03B-135	135	132+3/-5	105	180	250	2, 3
RH03B-140	140	135 ± 4	105	180	250	2, 3
RH03B-145	145	140 ± 4	110	180	250	2, 3
RH03B-150	150	147 ± 4	115	180	250	2, 3

● DENOTES FOR APPROVED (●表示已取得认证)