


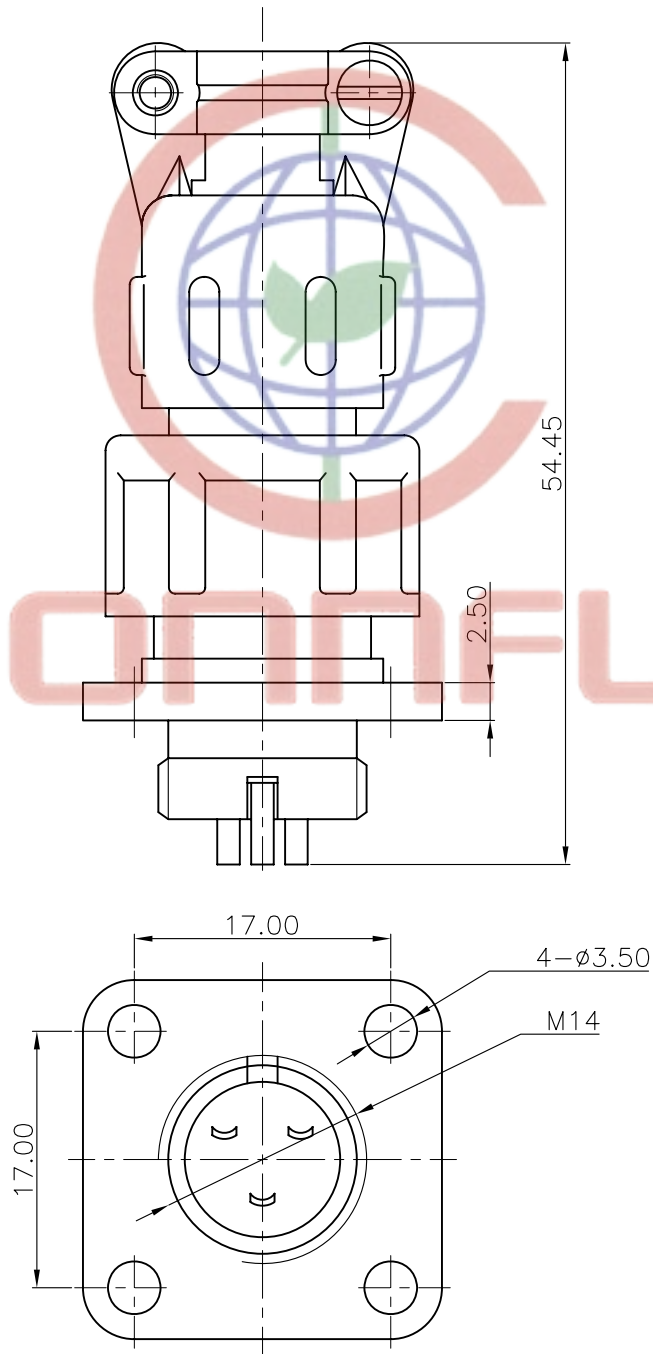

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/17/07'	~	

NOTES:


1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 100mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min.

2.PRODUCT NUMBER CODE:

DS1110-05 - X X X X


- SHELL SURFACE FINISHED
P:SPRAY THE PAINT (GRAY)
- CONTACT PLATING
Y: SILVER
- COLOR OF HOUSING:
L: BLUE
- No. OF CONTACTS
03: 3pin
04: 4pin
05: 5pin
07: 7pin




3pin



4pin



5pin



7pin

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE
X.	±0.60	X.	±5°	mm		MICRO JACK CONNECTOR
.X	±0.38	.X	±3°			
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER			SHEET SIZE	A4	SERIES DS1110-05 SERIES
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1110-05-XXX					



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD