



Yuasa Technisches Datenblatt

Yuasa YBX3214 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	60Ah
Kaltstartstrom (A) EN1	540A

Abmessungen

Länge	230mm
Breite	174mm
Höhe	205mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	14.9kg
--	--------



Gehäuseeigenschaften

Gehäusetyp	D23RS KOREA/BCI 86
Zellenanordnung	1
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion

Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	4A
Performance Marking	W4-C2-V3-E1


Anschlusspol Typ

Zellenanordnung


Batteriehälter

T1



Standard DIN Post



Positive Terminal



Negative Terminal

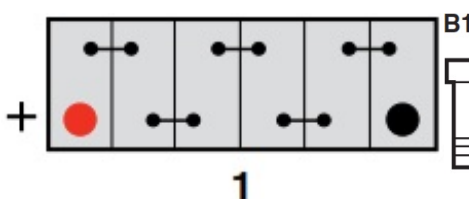

Datenblatt erstellt am 06/10/2023 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3214 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	540A

Dimensions

Length	230mm
Width	174mm
Height	205mm

Weights & Measures

Mean Weight with Acid	14.9kg
-----------------------	--------



Container Features

Case Type	D23RS KOREA/BCI 86
Cell Layout	1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1




Terminal Type

Cell Assembly Layout

Battery Hold-down

T1

Standard DIN Post

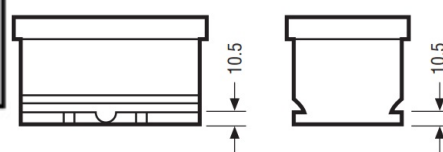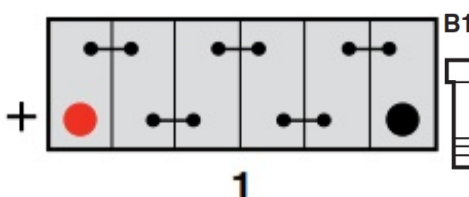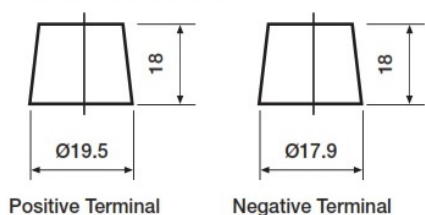

Data Sheet generated on 06/10/2023 – E&OE