




UQS-COB-5W-NW-12V

Professional Led Strip, 5 W / m

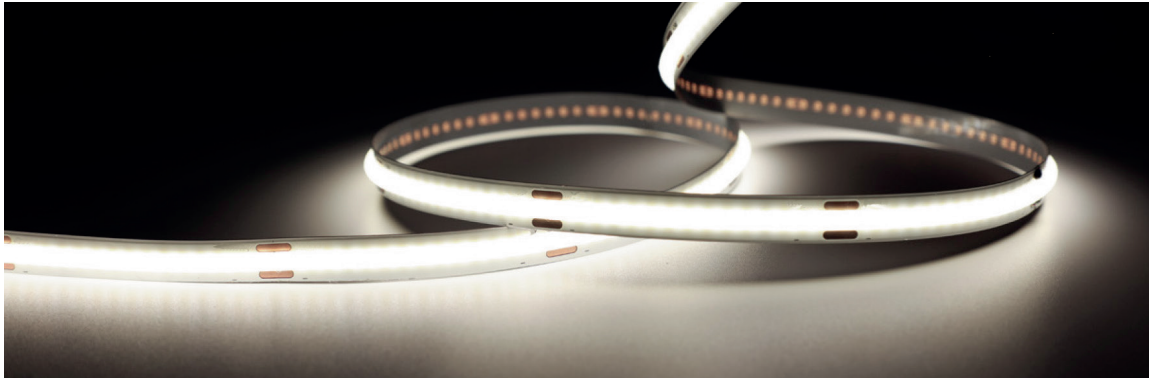


TECHNICAL DETAILS

SUPPLY VOLTAGE	12 V ± 0.5 VDC
POWER	5 W / m
CURRENT	0.42 A / m
POWER PER REEL (5M)	25 W
COLOR TEMPERATURE	4000K
BEAM ANGLE	180°
LUMINOUS FLUX PER METER	620 lm
CRI	90
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP20
WORKING TEMPERATURE	-20°C ~ 50°C
STORAGE TEMPERATURE	-30°C ~ 80°C
LED QTY (PER METER)	320 LEDs/m
WIDTH PCB	8 mm
CUT SECTION	25 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm ²) stranded wire, length = 360 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5004 x 8 x 2.2 mm

ENERGY
MW LIGHTING
UQS-COB-5W-NW-12V
3 kWh/1000h

PACKING 5 m / roll (bag); 25 pcs / ctn; ctn dimensions: 48.5 x 26 x 38 cm

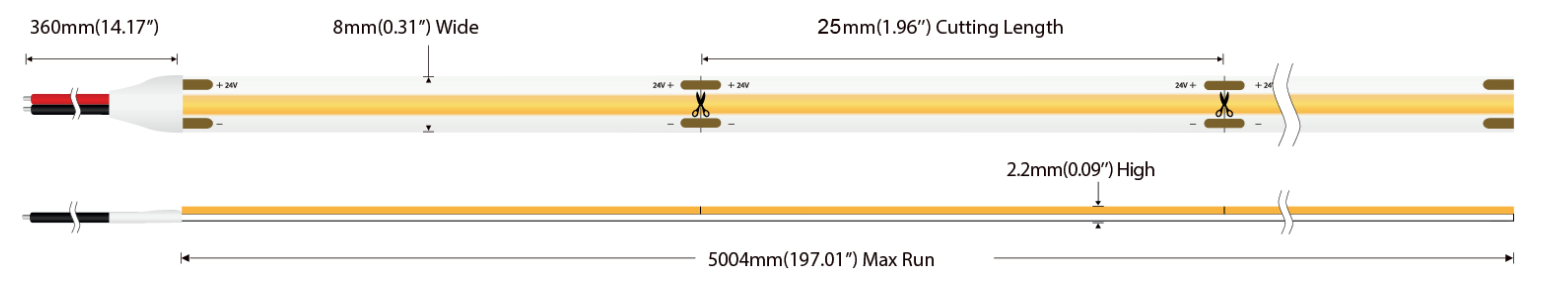


CONNECTORS PCB Width 8 mm



UQS-COB-8W-SS



UQS-COB-8W-CS



UQS-COB-8W-SS-L