
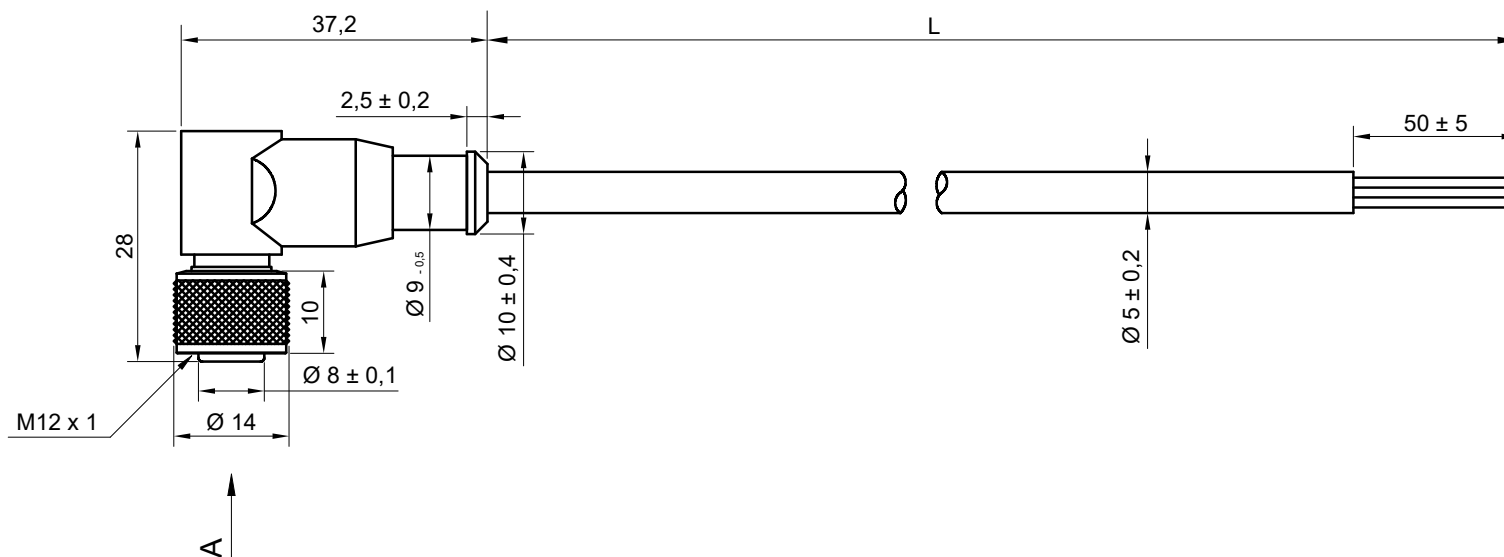





CODE	L(mm)
N12FA5E20ES	500 ±50
N12FA5E21ZS	1000 ±50
N12FA5E22ZS	2000 ±50
N12FA5E23ZS	3000 ±50
N12FA5E25ZS	5000 ±1%
N12FA5E27ZS	7000 ±1%
N12FA5E210S	10000 ±1%
N12FA5E215S	15000 ±1%
N12FA5E220S	20000 ±1%

 Dim. in mm	Cable Data		Marking		Connection layout VISTA A 	Housing Data		Description:		
	Conductors Material:	Electrolytic bare copper	Text:			Standard:	IEC 61076-2-101			
 MCA CONNECTORS MCA Connectors S.r.l. Via Plebiscito, 150 73058 TUGLIE (LE) Tel.: 0833 518248 Fax.: 0833 395926 mail: info@mcaconnectors.com web: www.mcaconnectors.com	Composition:	5 x 0,25	Lot description:		1 Brown 2 White 3 Blue 4 Black 5 Grey	Rated Voltage:	60 V	Customer:		
	Stranding:	32 x 0,10				Rated Current:	4 A			
	Shield:		Color:			Insulation:	≥100MΩ (IEC60512)	Customer code:		
	Insulation Material:	PVC	Character height:			Contact resistance:	≤10mΩ			
This drawing can not be copied or reproduced in any way and can not be passed to third parts without written authorization.	Jacket Material:	PVC CEI 2022 II	Marking position:		1 Brown 2 White 3 Blue 4 Black 5 Grey	Fixing screw torque:	min 0,5; max 0,8 N/m	Code:		
	Jacket Color:	Black (RAL 9005)	Marking step:			Temperature range:	-25°C...+80°C			
						Housing Color:	Black	N12FA5E2XXS		
						Protection Class:	IP67			
						Contact Material:	CuSn gold plated			
						Mounting:	Anti-vibration system	Drawn: <i>Giudice C.</i> Approved: <i>Giudice C.</i> Draw no.: 20204		
						Overmoulding material:	TPU (Polyurethane)			
						Coupling nut material:	CuZn nikel plated	Date: 04/05/2020 Revision date: Revision no.: 0		
						O-Ring Material:	FKM (Viton)			
						Contact holder material:	PA +GF			