


## Model:PTC15

### Characteristics:

Small leakage,Low noise,High efficiency,Low no load current,PCB mounting,Used for supper acoustics,Medical equipment,Military engineering,Precision instrument,using the imported high quality toroidal core Primary working voltage: 110×2/115×2/120×2/(Can be customized according to customer's requirements)

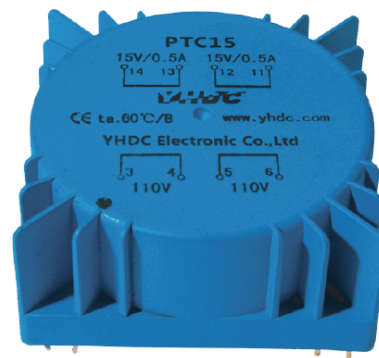

### Technical index:

Mounting type:PCB

Flame resistance:UL94-V0

Insulation class:B grade

Work temperature:-30°C~+60°C

Frequency range:50Hz~60Hz

Dielectric strength:P1/P2: 600V AC


S1/S2: 600V AC

P/S: 4000V AC

### Electrical data:

Primary voltage	110×2/115×2/120×2	V
Primary voltage range	±10	%
Voltage regulation	≤20	%
Power	15	VA
Temperature rising	≤20	°C
No load loss	<0.3	W
weight	300	g


### Dimension(mm):

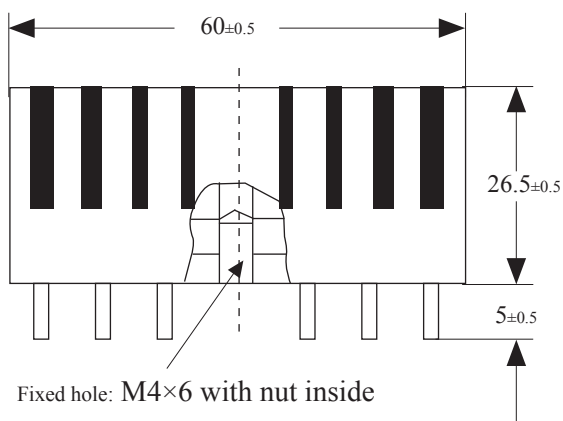

Front View


Secondary voltage	Secondary no load voltage	Secondary full load current
7V×2	8.9V×2	1071mA
9V×2	11.1V×2	833mA
12V×2	14.8V×2	625mA
15V×2	18.5V×2	500mA
18V×2	22.2V×2	417mA
22V×2	27.2V×2	341mA

### Schematic Diagram:



Series connection: 4-5 short connection, 3-6 input

Parallel connection: 4-6 short connection, 3-5 input

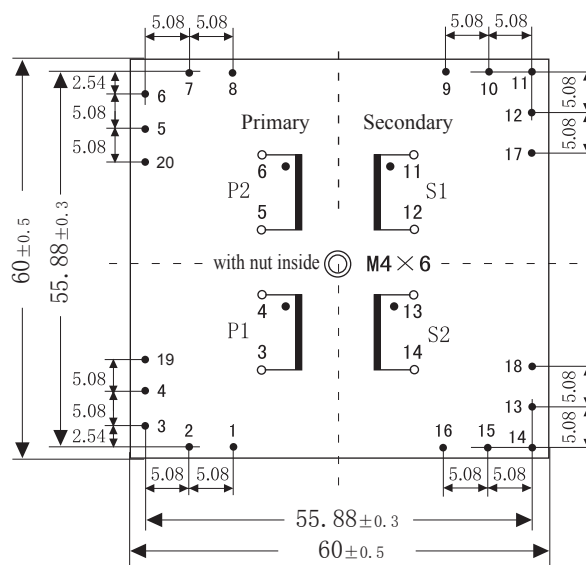

Bottom View