


LED BULB



Product&Family Code: 001 003 0010

ULTRA-10


Technical Drawing

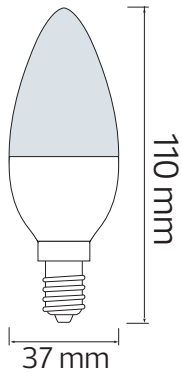

Photometric Diagram

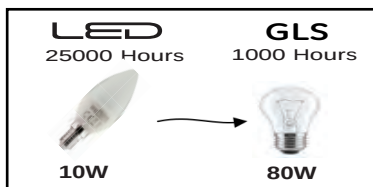

Technical Data

Voltage (V)	175-250V
Product Wattage (W)	10
Equivalence with incandescent lamp	80
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	A1G F
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	1000
Luminous Efficacy (lm/W)	100
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	200 °
Starting Time	<0.5
Number of ON-OFF cycling	x12,500

Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

12.500X ON / OFF	NO UV / IR	mA 74
Start Up Time <0.5	%85 ENERGY Saving	25000h Lifetime
0,0mg Hg	Optimally	Ra >80
200°	-10°C 40°C	PF >0.5 Power Factor
Warm Up %60 < 0.5 sc.		



E14