

Long haul

SMART LINE AL50

Excellent fuel efficiency with optimised grip performance for long haul use



Hankook Premium Tyre Technologies



Groove wall step features prevent block deformation and gives reinforcement between tread blocks.



The wide tread block enhances the rigidity and improves grip, mileage and reduces the tyre's rolling resistance.



At 70% wear, hidden grooves appear. These grooves improve wet grip and traction when the tyre wears.





Dimension data

SRS	Size	LI/SS	Tread depth		Regrooving		Tyre labelling class		
			m/m	Depth	Width	EU	US	SAE	
TUBELESS									
80	315/80R22.5	156/150L	13.0	3	7~9	B	B	A	70dB
70	315/70R22.5	156/150L	11.6	3	7~9	A	B	A	71dB
60	295/60R22.5	150/147L	11.0	3	6~8	B	B	A	70dB
	315/60R22.5	154/148L	10.5	3	6~8	B	B	A	70dB
55	385/55R22.5	160K	11.6	3	6~9	A	B	A	70dB
50	355/50R22.5		10.6	3	7~9				

- * Technical data subject to change without prior notice.
- * Please visit our website (hankooktire.com/uk) for more detailed information on the Hankook EU labelling grades.


Regrooving technical data



New tread

Recommended regroove tread pattern

Recommended vehicles and positions

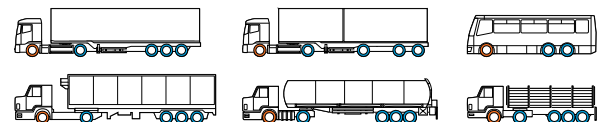

- Recommended position
- ⊙ Available position