

# DURACELL®


## MN1500 Size: AA (LR6)

Alkaline-Manganese Dioxide Battery



Zn/MnO<sub>2</sub>



|                             |                                            |
|-----------------------------|--------------------------------------------|
| Nominal voltage             | 1.5 V                                      |
| Impedance                   | 90 m-ohm @ 1 kHz                           |
| Typical weight              | 24 g (0.8 oz)                              |
| Typical volume              | 8.4 cm <sup>3</sup> (0.5 in <sup>3</sup> ) |
| Terminals                   | Flat                                       |
| Storage temperature range   | 5°C to 30°C (41°F to 86°F)                 |
| Operating temperature range | -20°C to 54°C (-4°F to 130°F)              |
| Designation                 | ANSI: 15A IEC: LR6                         |

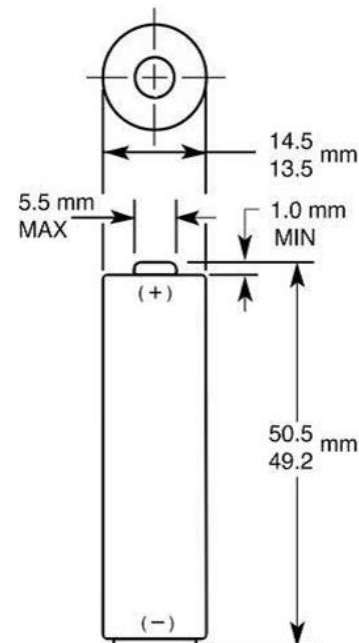

Dimensions shown are IEC standards

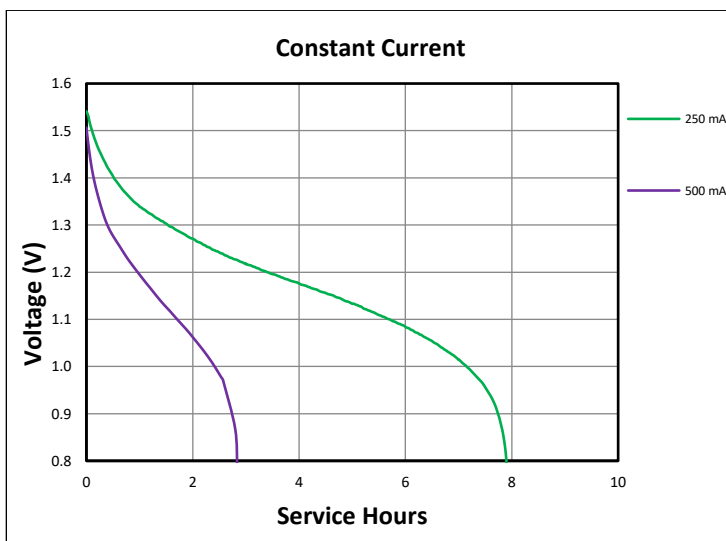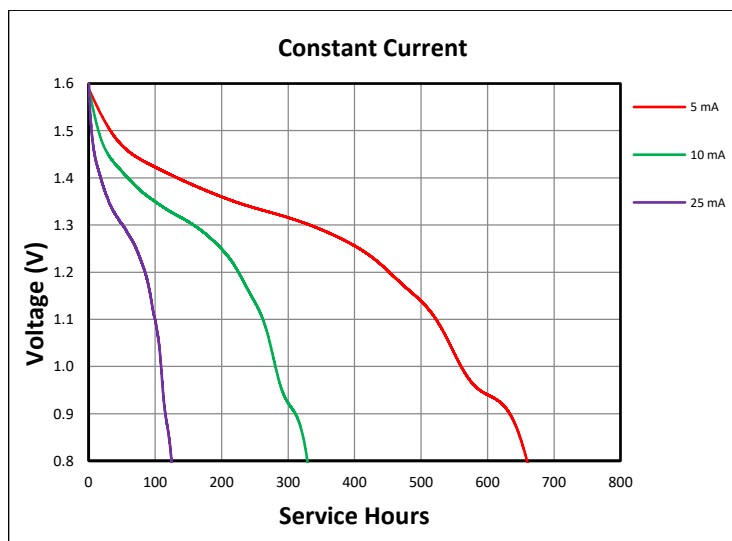

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)





Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

# DURACELL®

## MN1500 Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO<sub>2</sub>

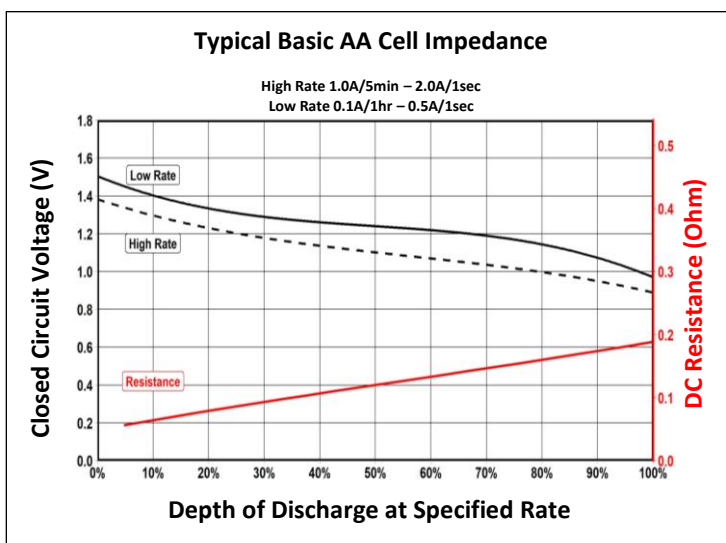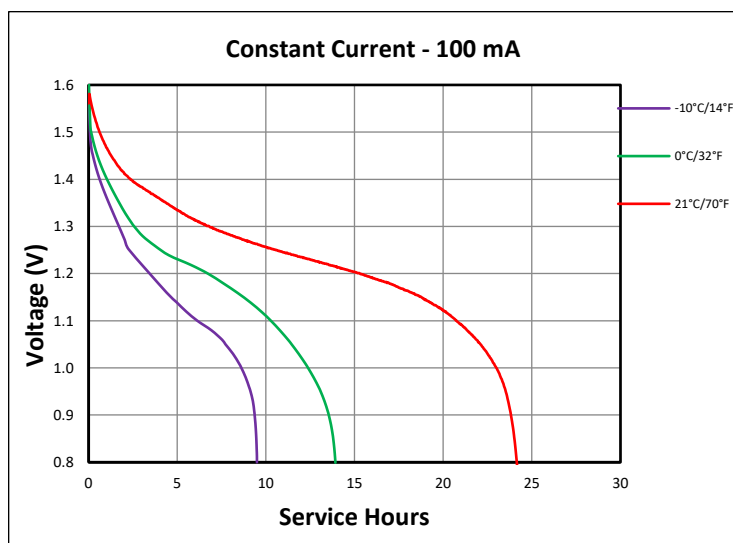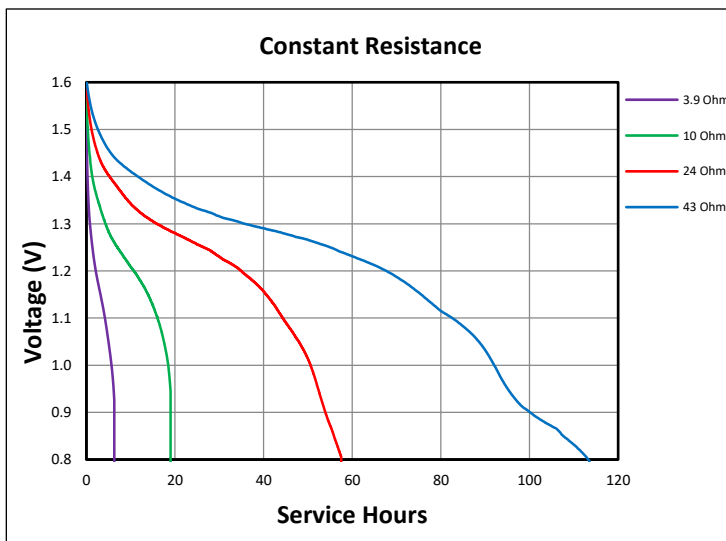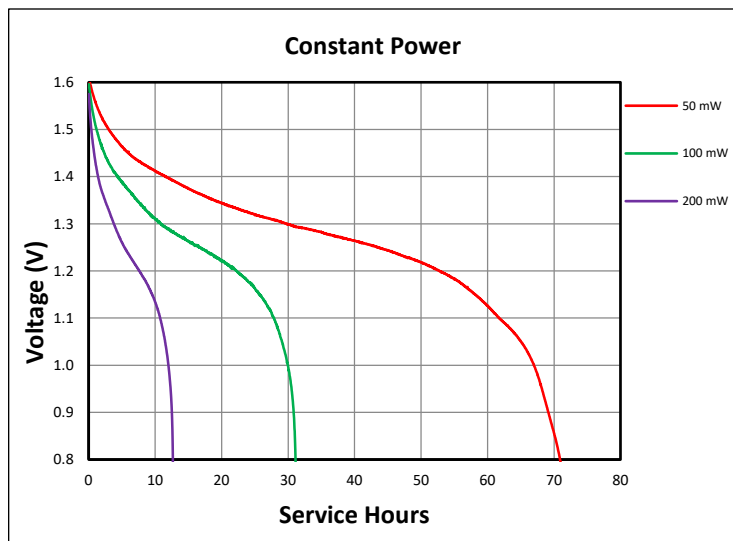

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

# DURACELL®

## MN2400


### Size: AAA (LR03)

Alkaline-Manganese Dioxide Battery



Zn/MnO<sub>2</sub>



|                             |                                            |
|-----------------------------|--------------------------------------------|
| Nominal voltage             | 1.5 V                                      |
| Impedance                   | 119 m-ohm @ 1 kHz                          |
| Typical weight              | 11 g (0.4 oz)                              |
| Typical volume              | 3.5 cm <sup>3</sup> (0.2 in <sup>3</sup> ) |
| Terminals                   | Flat                                       |
| Storage temperature range   | 5°C to 30°C (41°F to 86°F)                 |
| Operating temperature range | -20°C to 54°C (-4°F to 130°F)              |
| Designation                 | ANSI: 24A IEC: LR03                        |

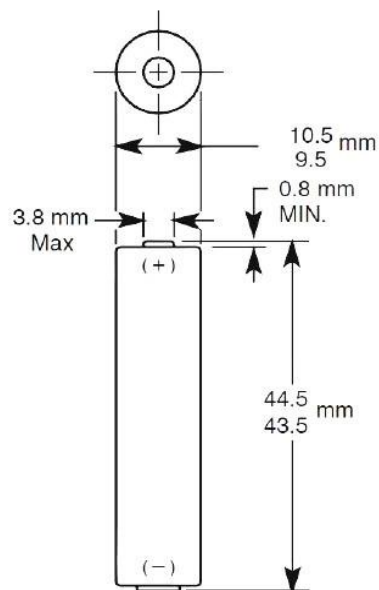

Dimensions shown are ANSI standards

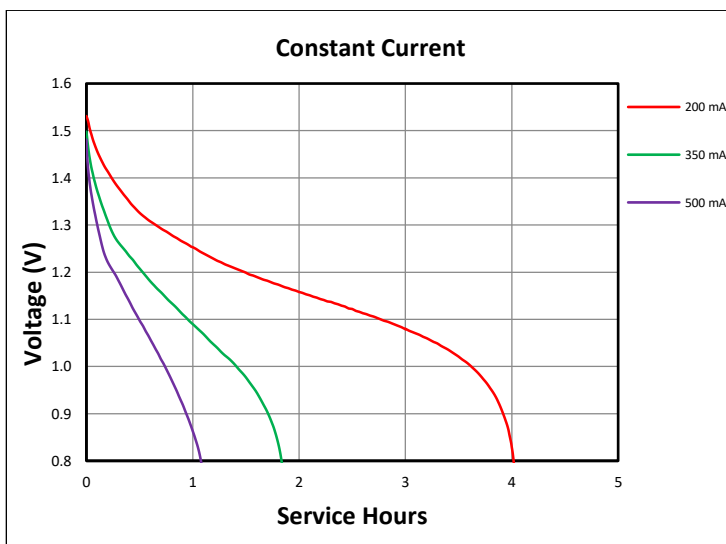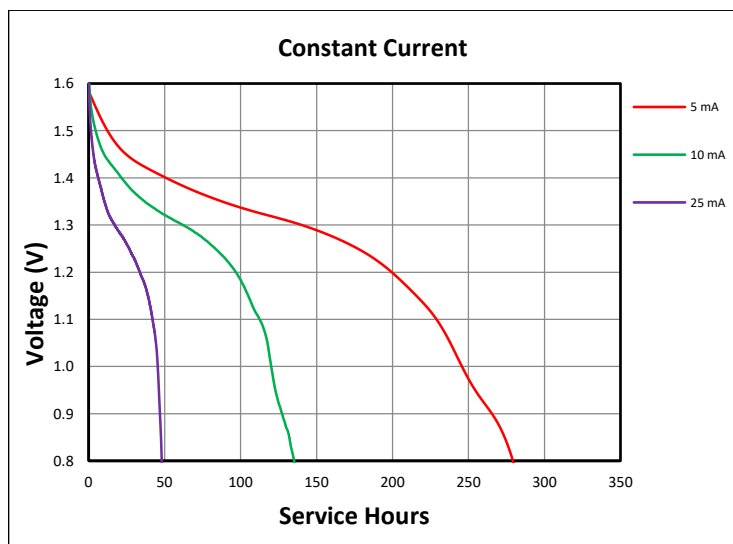

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.




# DURACELL®

## MN2400

### Size: AAA (LR03)

Alkaline-Manganese Dioxide Battery

Zn/MnO<sub>2</sub>

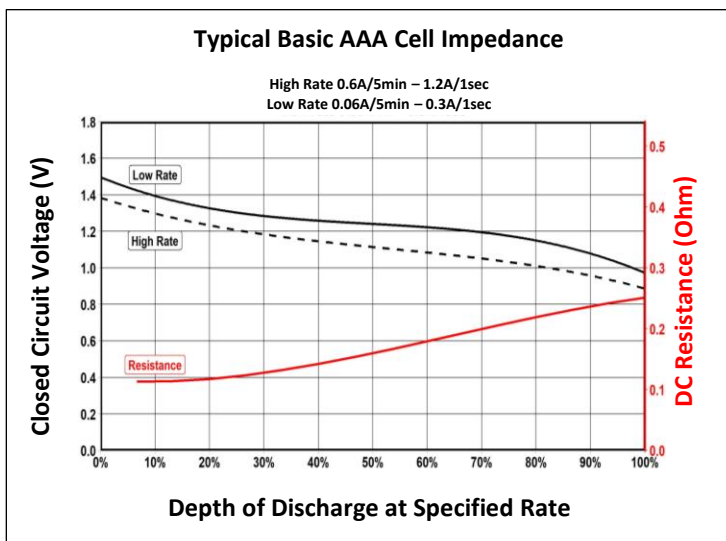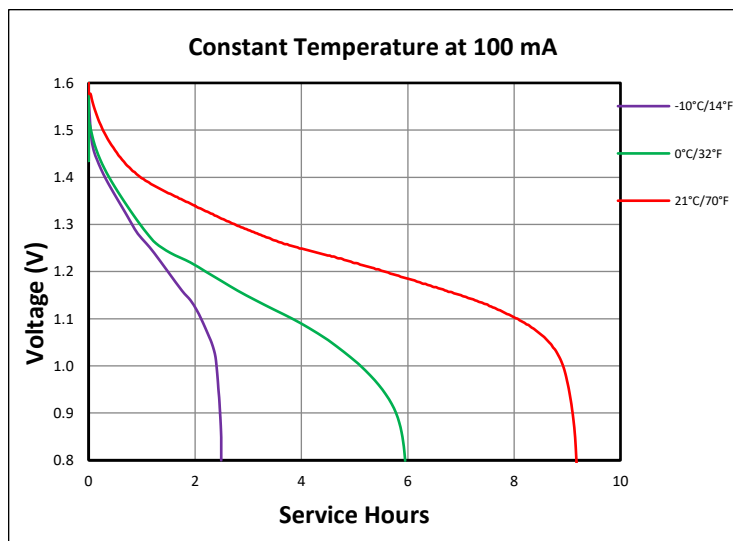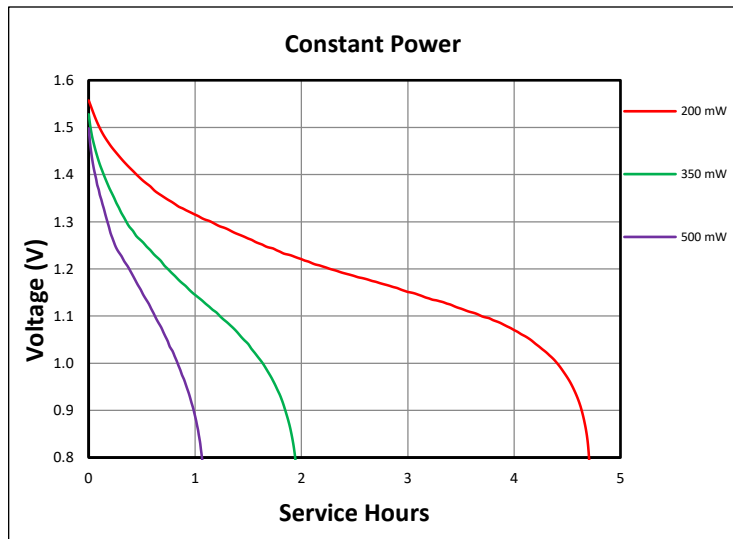

## DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.