


SERIA CS

- NOŻYCE DO CIĘCIA STALI
- MARILYN SHEAR

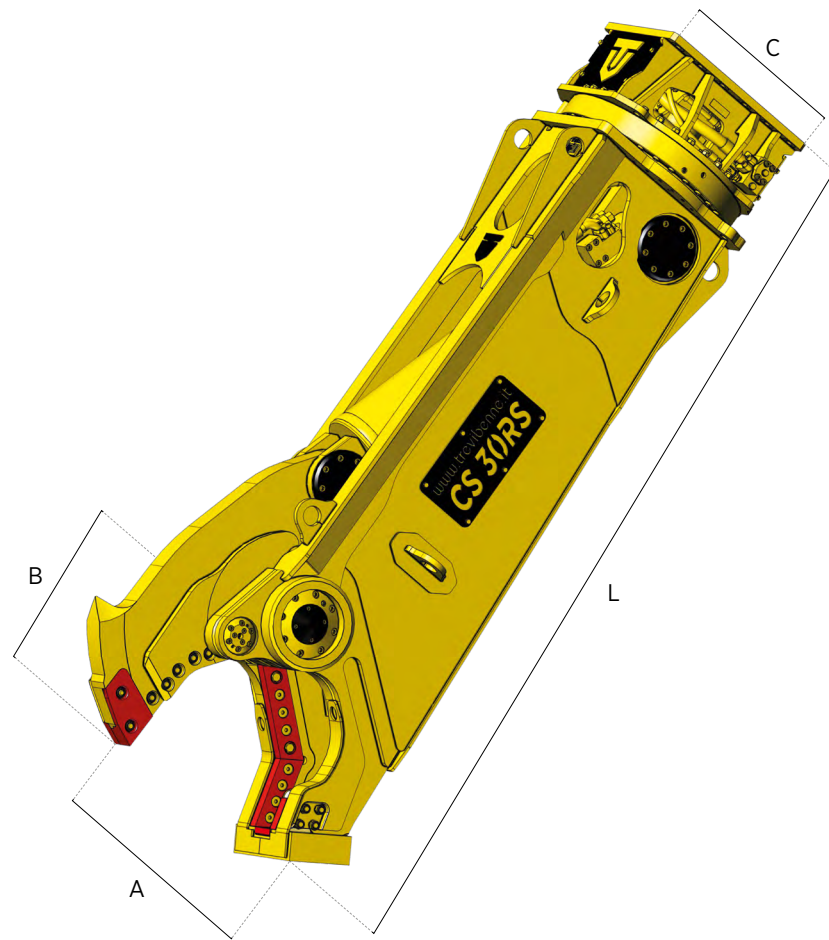

model	(2)	(1)	(2)	ton
CS 03R	1,5	3,5	2	3
CS 05R	2,5	4,5	3	4
CS 07RS	3,5	8	4	7
CS 12RS	6	12	7	10
CS 20RS	9	18	10	16
CS 25RS	15	22	16	20
CS 30RS	19	27	20	25
CS 40RS	24	32	25	30
CS 50RS	29	38	30	35

model	(2)	(1)	(2)	ton
CS 55RS	33	43	35	40
CS 70RS	43	68	45	65
CS 100RS	60	100	70	90
CS 140RS	85	120	90	110
CS 160RS	100	150	110	140
CS 180RS	110	160	120	150
CS 200RS	125	210	150	190

model	(2)	(1)	(2)	ton
CS 03R	3,5	5,5	4	5
CS 05R	4,5	9	5	8
CS 07RS	7	14	8	12
CS 12RS	11	20	12	18
CS 20RS	17	25	18	23
CS 25RS	22	32	23	30
CS 30RS	29	41	30	38
CS 40RS	39	53	40	50
CS 50RS	48	63	50	60

model	(2)	(1)	(2)	ton
CS 55RS	58	73	60	70
CS 70RS	73	105	75	100
CS 100RS	105	165	120	150
CS 140RS	125	185	140	170
CS 160RS	125	225	160	210
CS 180RS	155	235	170	220
CS 200RS	180	310	200	280

(1) Optymalna kombinacja koparka - osprzęt
Optimum excavator - equipment combination

(2) Możliwa kombinacja koparka - osprzęt
Possible excavator - equipment combination



	CS 03R	CS 05R	CS 07RS	CS 12RS	CS 20RS	CS 25RS	CS 30RS	CS 40RS	CS 50RS
kg	300	465	880	1180	2050	2650	3000	4030	4800
kg*	230	360	630	930	1650	2250	2600	3440	4210
A mm	265	335	405	465	530	595	620	660	725
B mm	230	320	370	385	445	505	545	610	675
C mm	380	460	570	570	715	715	715	865	865
L mm	1330	1725	2180	2300	2660	2950	3130	3420	3660
bar	280	320	320	350	350	350	350	350	350
l/min.	80 / 100	80 / 150	100 / 150	150 / 250	180 / 250	200 / 300	200 / 300	300 / 400	350 / 450
bar	120	140	140	140	140	140	140	140	140
l/min.	5	5	5	15 / 30**	20 / 40**	25 / 50**	25 / 50**	25 / 50**	25 / 50**
	/	/	/	/	/	/	/	/	✓

*Waga urządzenia bez układu obrotowego / *Model weight without rotation
**Podwójny silnik / **Double motor



UPDATED

	CS 55RS	CS 70RS	CS 100RS	CS 140RS	CS 160RS	CS 180RS	CS 200RS
kg	6200	7900	10600	14200	16700	17900	19500
kg*	5200	6510	8480	12080	14110	14690	16290
A mm	795	845	930	1080	1100	1100	1180
B mm	690	710	960	1015	1080	1080	1130
C mm	1000	1100	1400	1400	1325	1325	1750
L mm	3905	4190	4430	5140	5440	5565	5580
bar	350	350	350	350	350	350	350
l/min.	400 / 500	450 / 600	500 / 800	500 / 800	800 / 1000	800 / 1000	900 / 1200
bar	140	140	140	140	250	250	250
l/min.	25 / 50**	70**	80**	80**	80**	80**	80**
	✓	✓	✓	✓	✓	✓	✓

*Waga urządzenia bez układu obrotowego / *Model weight without rotation
**Podwójny silnik / **Double motor

