

## DS-3E0109P-E/M(B) 100M PoE Switch

DS-3E0109P-E/M(B) is a layer 2 100M PoE switch. Based on wire-speed forwarding, the switch supports Ethernet PoE power supply and extend mode. The power supply distance reaches as long as 250 m. It also supports prior and stable transmission of the important surveillance area video when connected to the high priority ports.



### Feature and Function

- 8 x 100M PoE ports and 1 x 100M Ethernet port.
- Supports IEEE802.3at/af.
- Supports IEEE 802.3, IEEE 802.3u and IEEE 802.3x.
- Supports high priority ports.
- Supports 8-core power supply.
- Up to 250 m transmission distance.
- PoE port with 6 KV surge protection.
- Supports PoE output power management.
- 100M network access.
- Wire-speed forwarding and non-blocking design.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Fan-free design with high reliability.




## Specification

Model	DS-3E0109P-E/M(B)
Network parameters	
Port number	8 x 100M PoE ports, 1 x 100M Ethernet port.
Port type	RJ45 port, Full duplex, MDI/MDI-X adaptive
Standard	IEEE802.3, IEEE802.3u, IEEE802.3x
Processing type	Store-and-forward switching
Ports with high priority	1 to 2 ports
Ports for long-distance transmission	1 to 8 ports
MAC address table	2 K
Exchange capacity	1.8 Gbps
Packet forwarding rate	1.339 Mpps
Internal cache	1 Mbits
PoE power supply	
Power supply standard	IEEE 802.3af, IEEE 802.3at
Power supply cable core	Supports 8-core power supply, Ethernet cable 1/2/3/6 and 4/5/7/8 provide simultaneous power supply
PoE port	1 to 8
Max. port power	30 W
Max. machine power	60 W
Mechanical structure	
Shell	Metal material, fan-free design
weight	0.35 kg (0.77 lb)
Dimensions (L × H × D)	170 mm × 27.6 mm × 93.1 mm (6.7" × 1.1" × 3.7")
Environment	
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Relative humidity	5% to 95% (no condensation)
Power supply	
Power supply specification	48 VDC, 1.35 A

## Physical Interface

Front panel:

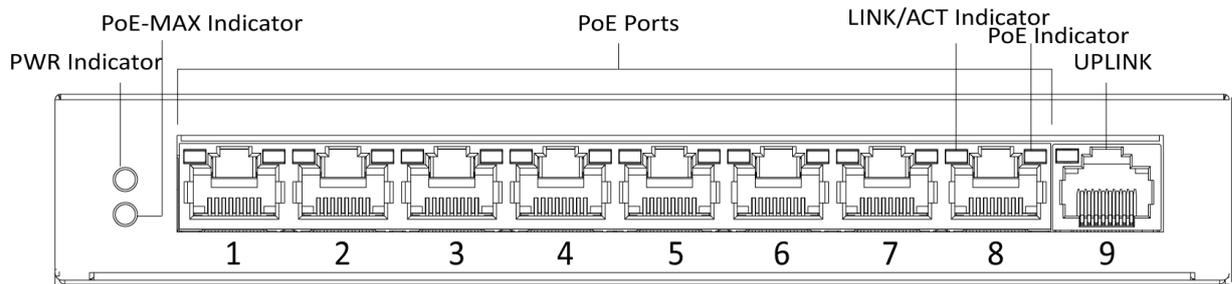


Back panel:




## Available Model

DS-3E0109P-E/M(B)

## Dimension

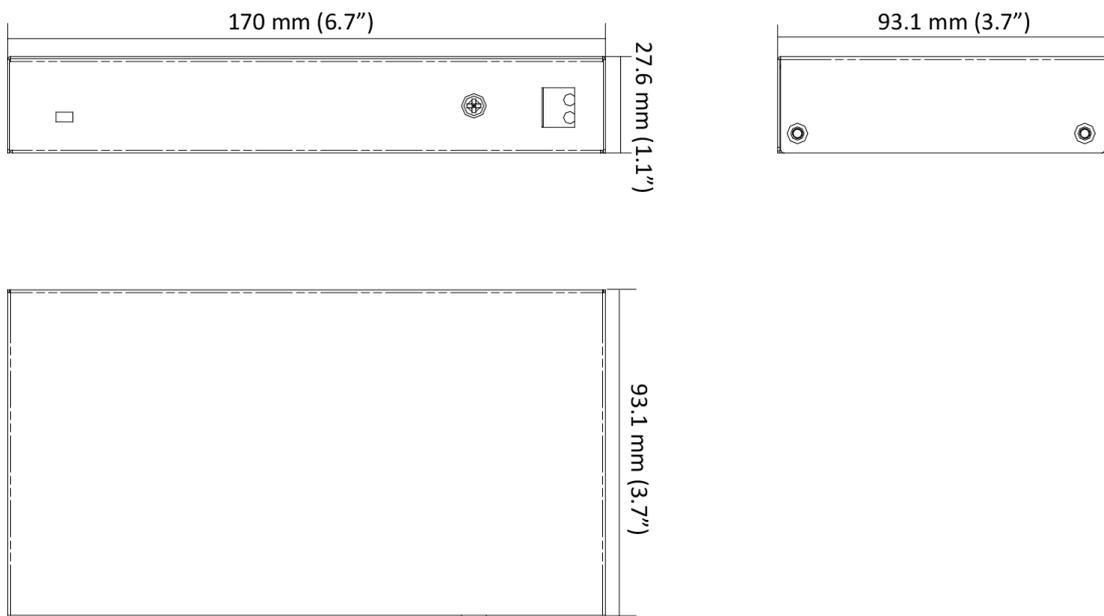

## Typical Application

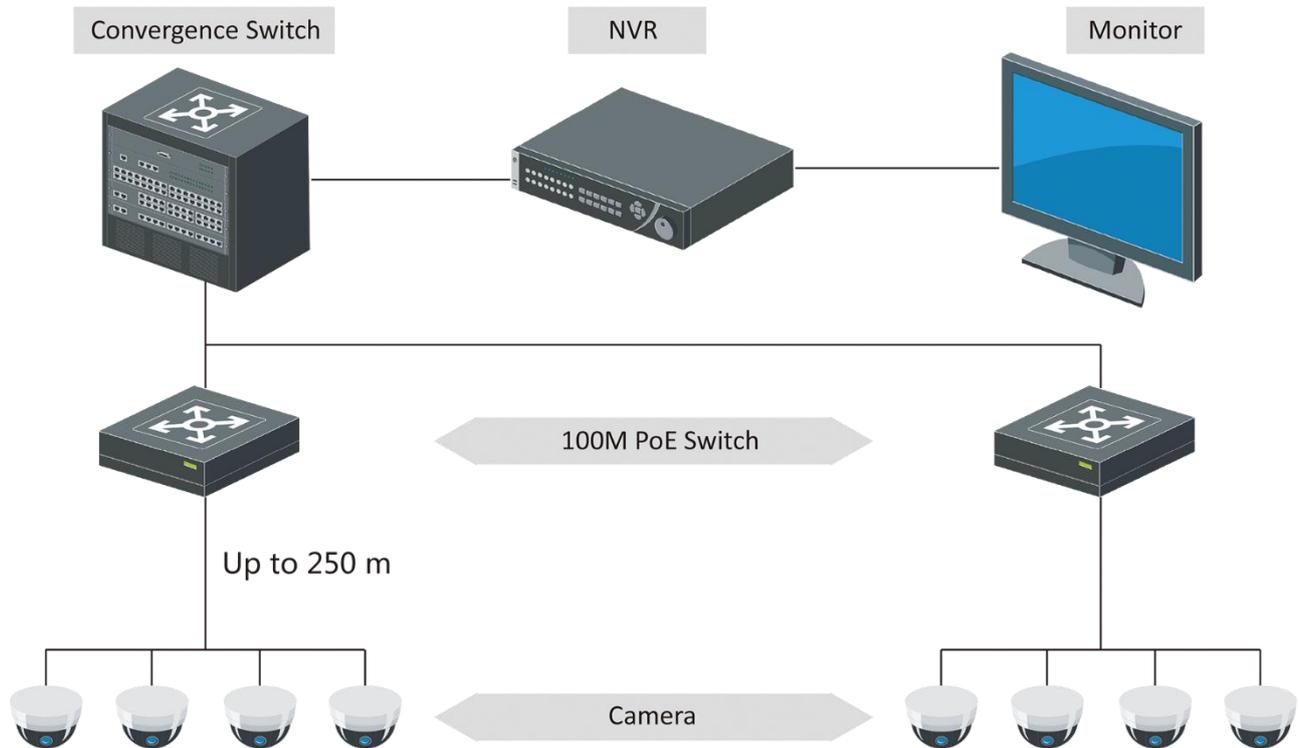

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com