

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Jiangmen Jiaxing Lighting Co.,Ltd

Supplier's address: C&E Connection E-Commerce (DE) GmbH, Zum Linnegraben 20, 65933, Frankfurt am Main, Germany

Model identifier: JX-E12-1(25-625)

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E12		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		13	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 200 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power (P_{on}), expressed in W		13,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	70	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	40		
	Depth	40		


ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,384 0,376	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1	Beam angle in degrees, or the range of beam angles that can be set	1	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,87	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

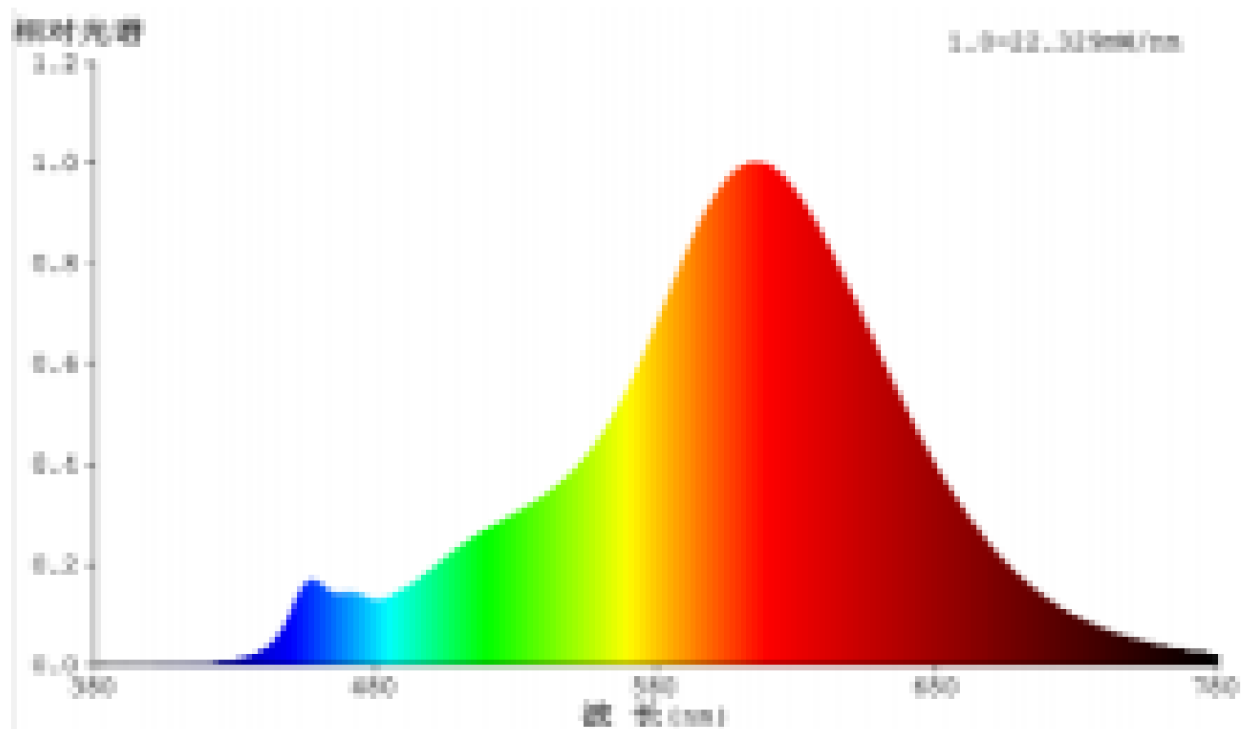

Model placed on the Union market from 06/06/2024



EPREL registration number: 2046791

<https://eprel.ec.europa.eu/qr/2046791>

Supplier: REP Europe GmbH (Authorised representative)

Website: www.rep-europe.de

Customer care service:

Name: C&E Connection E-Commerce (DE) GmbH

Website:

Email: info@ce-connection.de

Phone: 49 017 46508451

Address:

Zum Linnegraben 20, 65933, Frankfurt am Main, Germany