
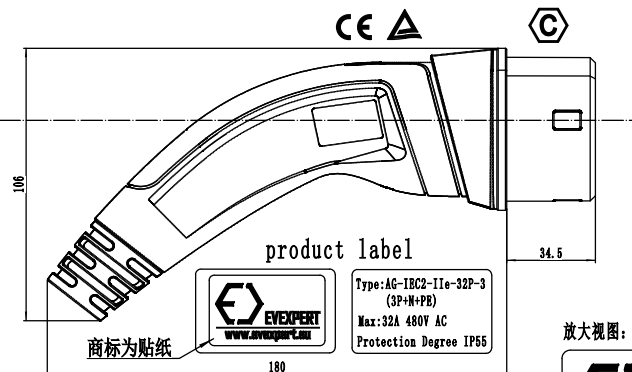


Type2-Type2 32A/480V AC 8m彈簧

Ver	ECN	MARK	DESCRIPTION	DATE	APP	CHK
B			插头增加C标	22.03.18		

Type II
2-IIe



Technical parameters

Current and Voltage : 32A 480V AC



Signal current : 2A 30V

Protection Degree : IP55

Cable specification

Function	32A 480V AC	Function
L1 (1)	6 mm ² Brown	L1 (1)
L2 (2)	6 mm ² Black	L2 (2)
L3 (3)	6 mm ² Grey	L3 (3)
N (4)	6 mm ² Blue	N (4)
PE (5)	6 mm ² Yellow-green	PE (5)
CP (6)	0.5 mm ² White	CP (6)
PP (7)		PP (7)

棕
黑
灰
蓝
黄
绿
白

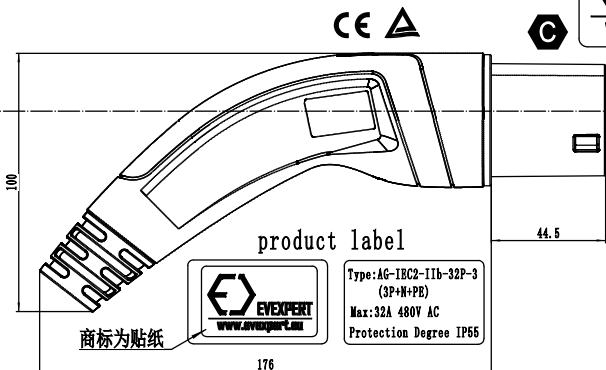Type II
2-IIb


32A 3P+N+PE+PP+CP

Type II ,was designed according to the standard of

IEC 62196-2 sheet 2-IIb/2-IIe

The static resistance is 220 ohm


Charging cable 8000mm 5*6mm²+2*0.5mm² Black TUV overall cable

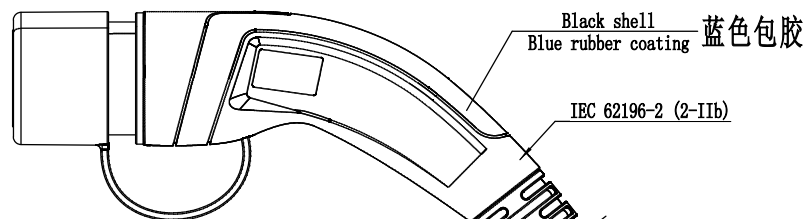

Black shell
e rubber coating 蓝色包胶


IEC 62196-2 (2-IIb)

mode of connection

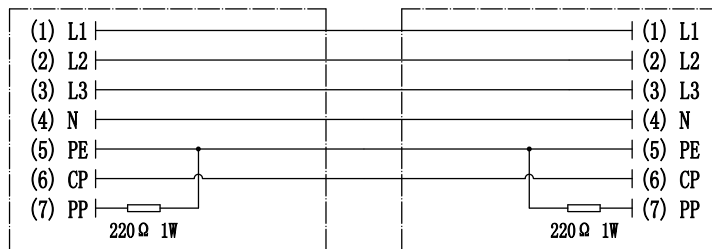

黑色TUV弹簧线
H07BZ5-F 5*6mm²+2*0.5mm²
Black TUV overall cable

After a total length of $8000 \pm 150 \text{ mm}$

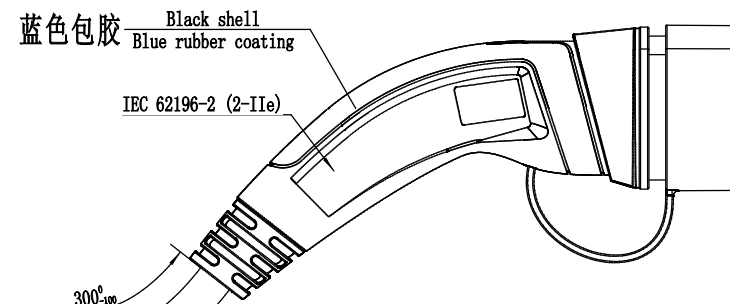

交	Black shell
	Blue rubber coating

IEC 62196-2 (2-IIe)

DWG. SYM	S	A	B	PROJ. SYM		 AG ELECTRICAL TECHNOLOGY CO., LTD				
MATL	Specifications				WEIGHT	NAME	Charging connectors			
DESIGNED			CHECK		STD/CHECKED		DRAW NO	AG-TEC2-IIb/e-32P-3	SIZE A4	SCALE X:X
CHECKED			PROCESS		APPROVED		PART NO		SHEET X OF X	