



AIR-OPERATED DOUBLE DIAPHRAGM PUMPS



Meclube Model P20

Made in POLYPROPYLENE

Compression ratio: 1:1

Max flow-rate: 20 l/min

Fluid connections: 3/8" BSP


EX II 3/3 GD c IIB T 135°C zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-P020-AB1	POLYPROPYLENE	NBR+PTFE	SS AISI 316	NBR	OIL-EXHAUSTED OIL-DIESEL FUEL
028-P020-AB2	POLYPROPYLENE	NBR+PTFE	PTFE	VITON	WATER-ANTI-FREEZE-WINDSCREEN-Ad Blue
028-P020-AB3	POLYPROPYLENE	NBR+PTFE	PTFE	PTFE	AGGRESSIVE FLUIDS (ACIDS AND BASICS) SEE THE ATTACHED LIST

Technical data

Fluid connections:	3/8" BSP
Air connection:	6mm
Max flow-rate:	20 l/min
Max air pressure:	8 bar
Max delivery head:	80 m
Max Suction Lift Dry:	6,0 m
Max Suction Lift Wet:	9,8 m
Max Solid passing:	3 mm
Noise level:	65 dB
Displacement per cycle:	30 cm ³
Max Viscosity:	12000 cps

Performance

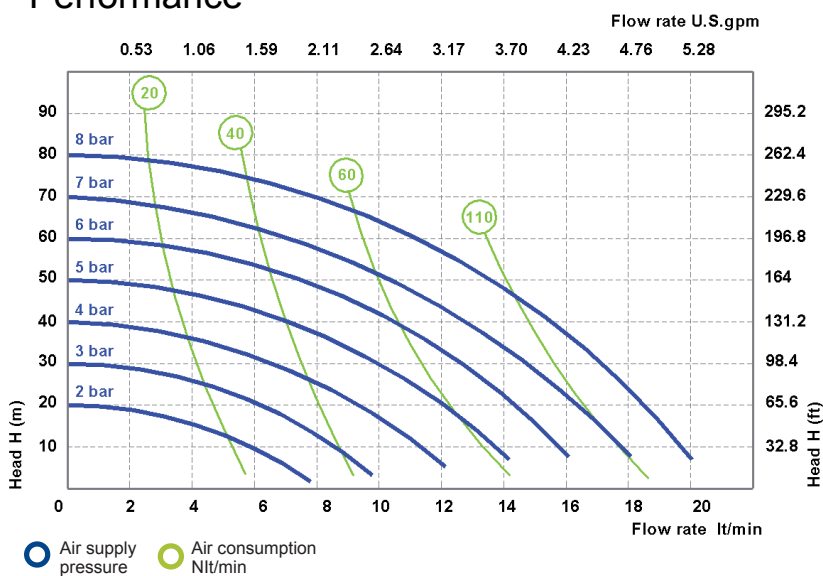

Dimensions

A (mm)	146
B (mm)	96
C (mm)	164
Weight kg	1,1
MAX Temperature	65°C

