

Specification for Approval

Product Name: 200W Non-isolated LED Driver

Product Model: MNC-200M240 ☒

MNC-200V240 ☐

Rev. B.3

Sample Date: —

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

Address: XiLi Songbai Road 1061, Nanshan
District, Shenzhen City, Guangdong
Province, P.R.China

Post Code: 518108

TEL: 0755-27657000

FAX: 0755-27657908

E-mail: info@mosopower.com

Web site: <http://www.mosopower.com>

E-mail: info@mosopower.com

Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

Product Specification

Product Name: 200W Non-isolated LED Driver

Product Model: MNC-200M240 ☒

MNC-200V240 ☐

Rev. B.3

Address: XiLi Songbai Road 1061, Nanshan
District, Shenzhen City, Guangdong
Province, P.R.China

Post Code: 518108

TEL: 0755-27657000

FAX: 0755-27657908

E-mail: info@mosopower.com

Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

[illegible]



Product Features:

- Input voltage range: 90~305Vac;
- Constant current design;
- THD<10%;
- 3-in-1 dimmable: 0~10Vdc, PWM, Resistor;
- Output current adjustable by potentiometer;
- Output and Dimming Signal Isolating;
- Surge protection:4KV line-line, 6KV line-earth;
- Protections: Output OVP, SCP,OTP;
- IP65 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

Application:

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

DESCRIPTION

The MNC-200 series is a 200W non-isolated constant-current, IP65 LED driver that operates from 90-305Vac input with excellent power factor and low THD. It is created for industrial lights, tunnel and street lights. The high efficiency of these drivers and compact metal case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, and short circuit.


MODELS

Model Number	Input voltage range(Vac)	Max Output Power (W)	Output Voltage Range (Vdc)	Output current (A)	Typical Efficiency	Typical THD	Typical PF	
							115Vac	230Vac
MNC-200X240	90-305	200	170-240	1.0	95%	10%	0.99	0.97

Notes:

1. X can be M or V, X=M means dimmable. X=V means non-dimmable.
2. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

OPERATING AREA I-V

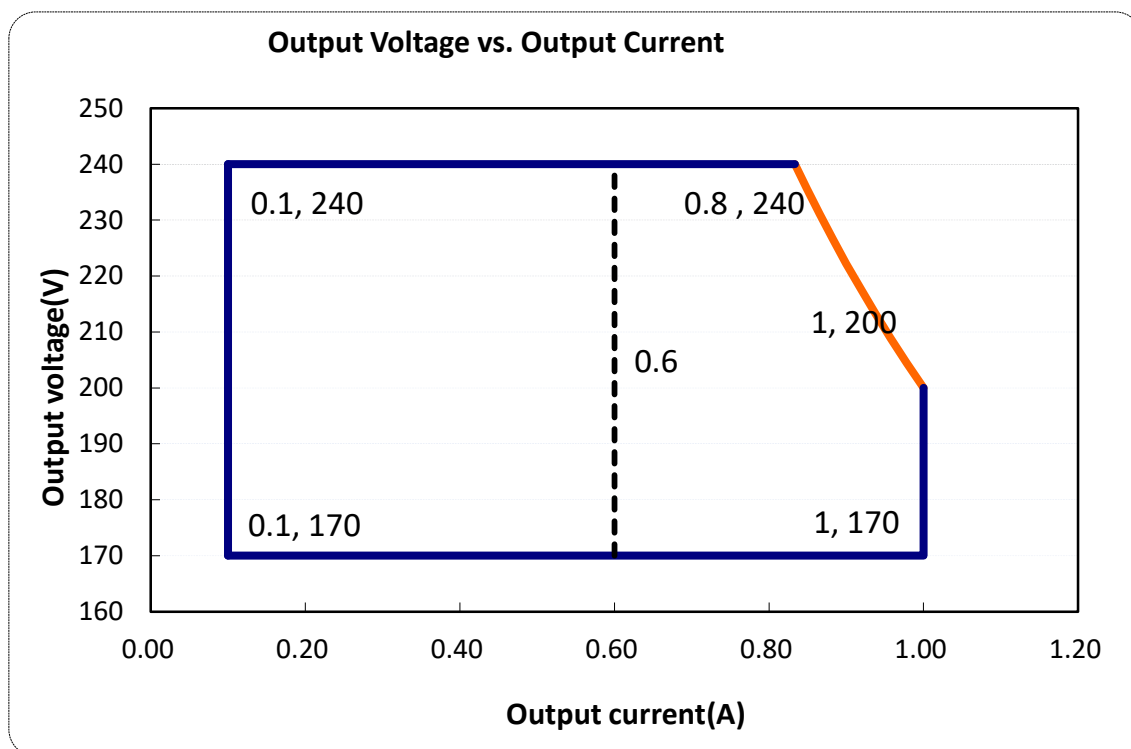

Note: At full range output voltage, the maximum power output is 200W.

INPUT SPECIFICATIONS

Parameter	Min.		Typ.		Max.		Notes
Input Voltage	90Vac		100-277Vac		305Vac		
Input Frequency	47Hz		50/60		63Hz		
Leakage Current	-		-		0.75mA		277Vac/60Hz
Input AC Current	-		-		2.8A		100-277Vac & full load
Inrush Current	-		-		100A		230Vac input, Ta=25°C (cold start)
Power Factor	0.97		0.99		-		115Vac, 50-60Hz, full load
	0.94		0.97				230Vac, 50-60Hz, full load
	0.90		0.93				277Vac, 50-60Hz, full load
THD	-		10%		15%		100-240Vac, 50-60Hz, 70%-100% load
	-		10%		15%		277Vac, 50-60Hz, 70%-100% load
Max. NO. of PSUs on Circuit Breaker	B10	2	B16	4	B25	6	230Vac 100% load
	C10	4	C16	6	C25	10	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-8%		8%	Iset=1.0A
Output current set range(A)	0.6	-	1.0	
Total Output Current Ripple(pk-pk)	-	-	20%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	100~277Vac &100% Load, load is LED
No Load Output Voltage(V)	-	290	320	
Line Regulation	-1%	-	1%	25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 70% to 100%.
Turn-on Delay Time	-	1S	3S	115Vac,100% load
	-	1S	2S	230Vac,100% load

GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @115Vac MNC-200X240	91%	93%		Measured at full load and 25°C ambient temperature
Efficiency @230Vac MNC-200X240	93%	95%		Measured at full load and 25°C ambient temperature
Efficiency @277Vac MNC-200X240	93%	95%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-PE	-	1650Vac	10mA/60S
	Output- PE	-	1650Vac	
Grounding Resistance	-	-	0.1Ω	25A/60S, under 25°C±10°C ambient temperature
Insulation Resistance	10MΩ	-	-	Input-PE, Output-PE, 500Vdc/60S/25°C /70%RH
MTBF	-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac,80% load (MIL-HDBK-217F)
Lifetime	-	50000Hrs	-	230Vac&100% load, 75°C case temperature, refer to lifetime curve for details
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Ambient Temperature	-40°C	-	+55°C	230Vac&100% load
Operating Case Temperature for Warranty Tc_s	-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 95% RH
Storage Temperature	-40°C	-	+85°C	Humidity: 5% to 100% RH
Dimensions (L*W*H)mm	L151*W63.5*H41.5mm			
Net Weight	750±100g/PCS			
Package	L500*W310*H160mm; 10PCS/Ctn.			

DIMMING

Parameter		Min.	Typ.	Max.	Notes
0~10V Absolute Maximum Voltage on the Vdim (+) Pin		-	10V	20V	
0~10V Source Current on Vdim(+)Pin		-	1mA	2mA	
Dimming Output Range	MNC-200M240	10%Imax	-	100%Imax	
			-		
Recommended Dimming Range for 0-10V		0V	-	10V	Default 0-10V/ PWM Dimming
PWM_in High Level		9.7V	-	10.3V	
PWM_in Low Level		0V	-	0.3V	
PWM_in Frequency Range		300Hz		2KHz	
PWM_in Duty Cycle		1%	-	99%	

SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	
		AS/NZS 61347.1	


EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	

NOTE:


This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.

INRUSH CURRENT WAVEFORM

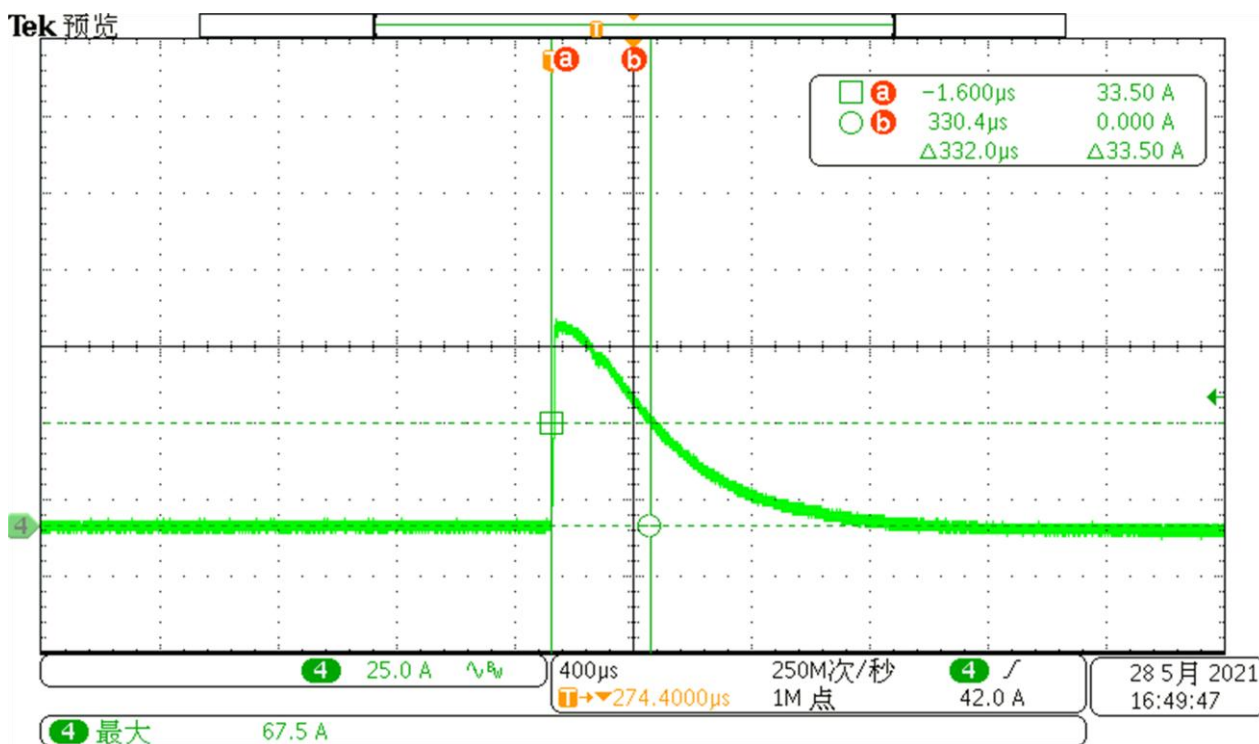


DERATING CURVE


Derating Curve

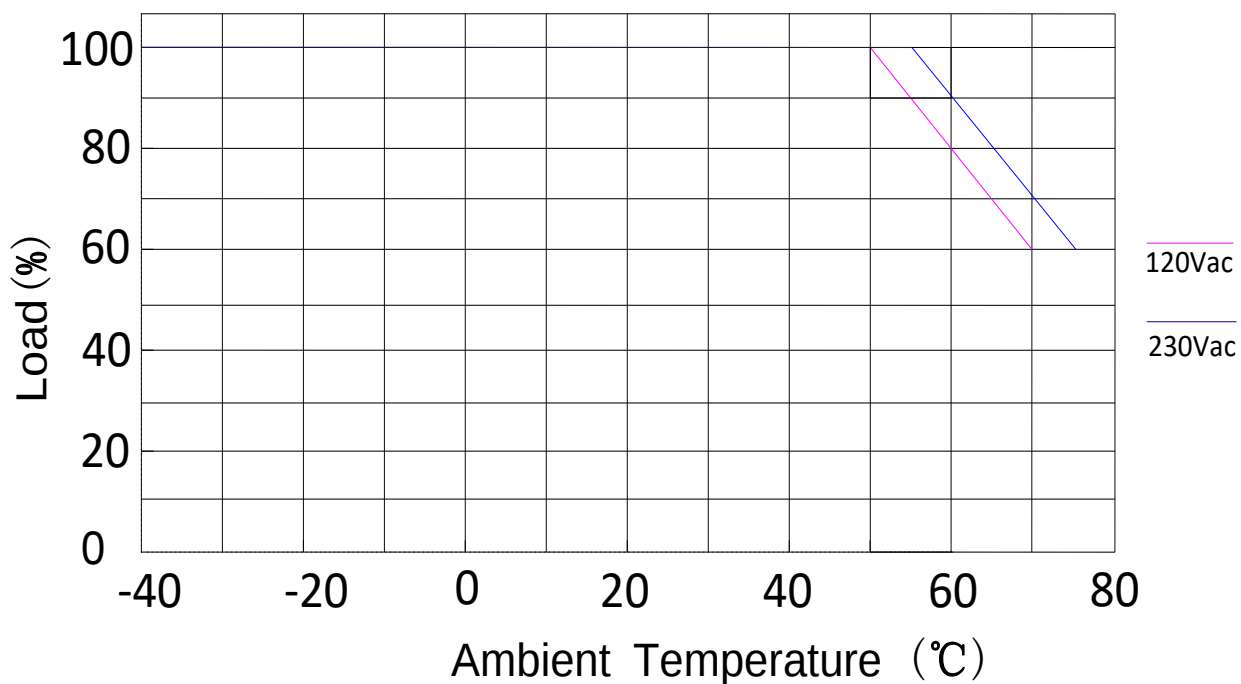


OUTPUT POWER VS INPUT VOLTAGE

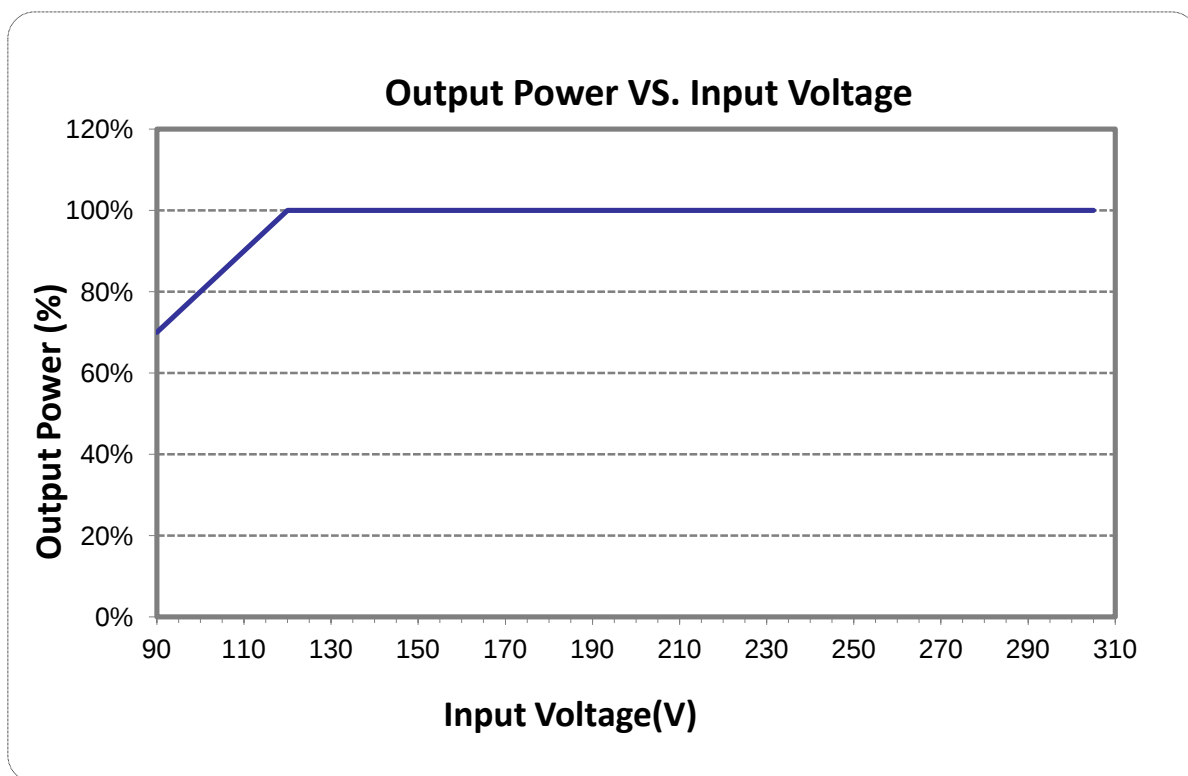


LIFETIME VS CASE TEMPERATURE

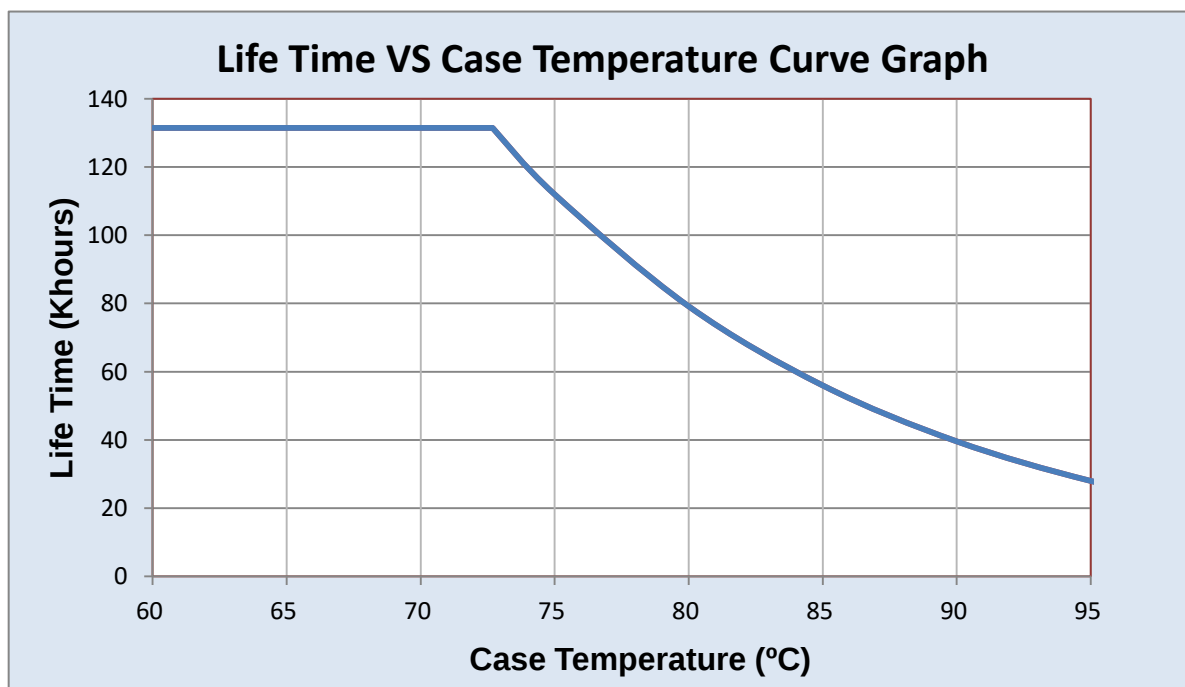


EFFICIENCY VS LOAD

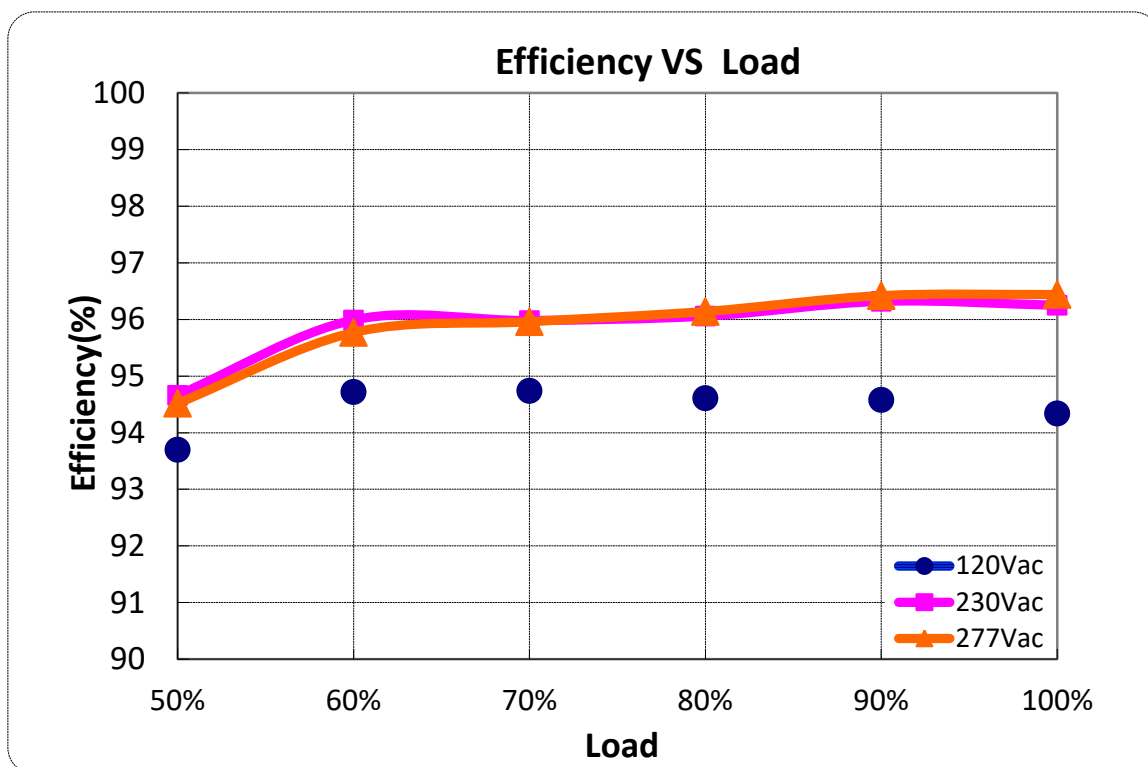

POWER FACTOR VS LOAD

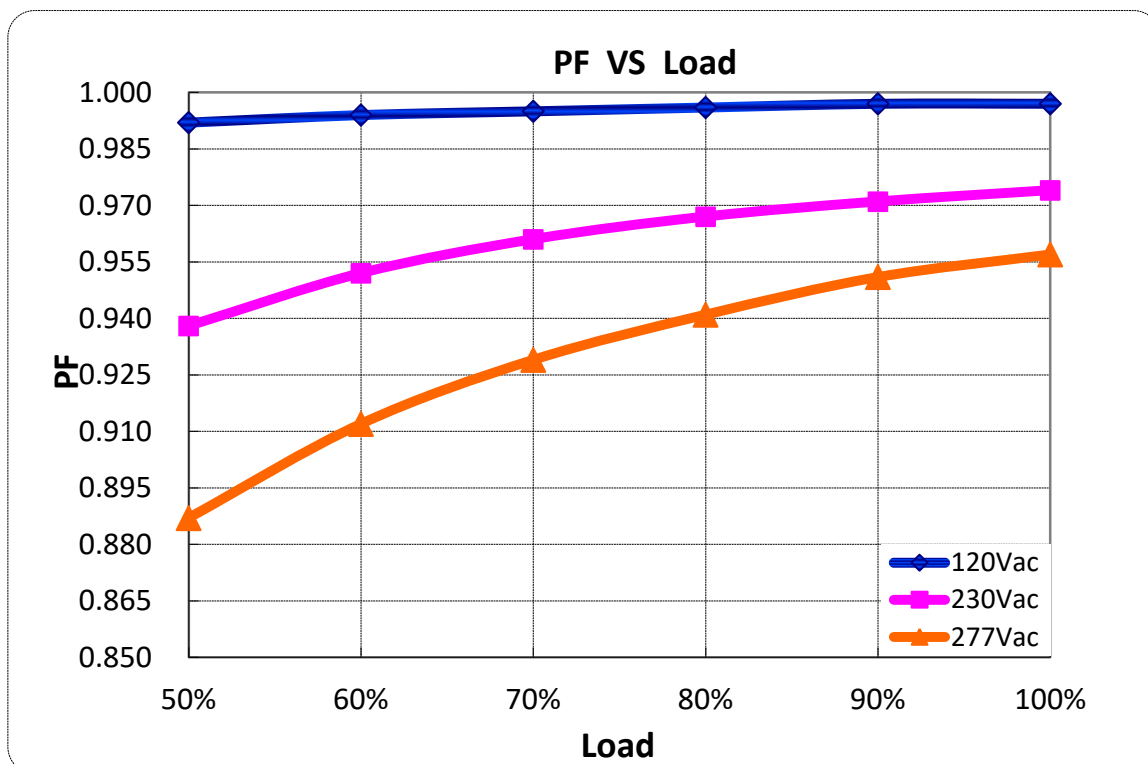


TOTAL HARMONIC DISTORTION

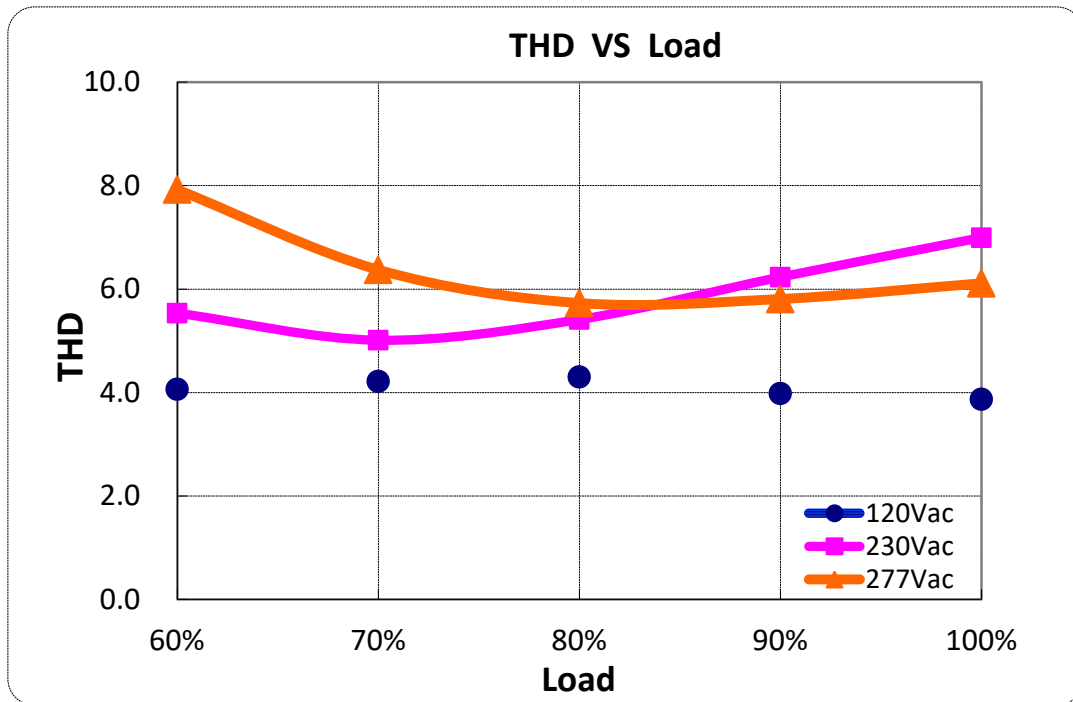

PROTECTIONS


Parameter	Notes
Over Voltage Protection	Run into protection model when output voltage exceeds limit.
Short Circuit Protection	Hiccup mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.

0-10V/PWM DIMMING

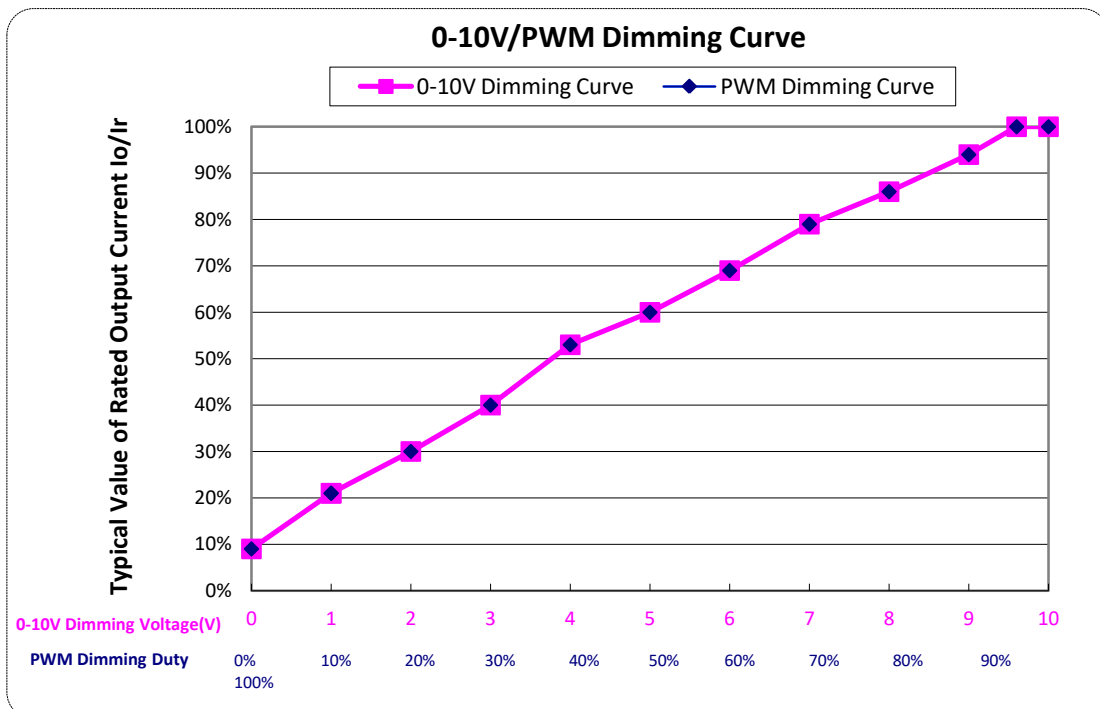

MECHANICAL OUTLINE

MNC-200M240

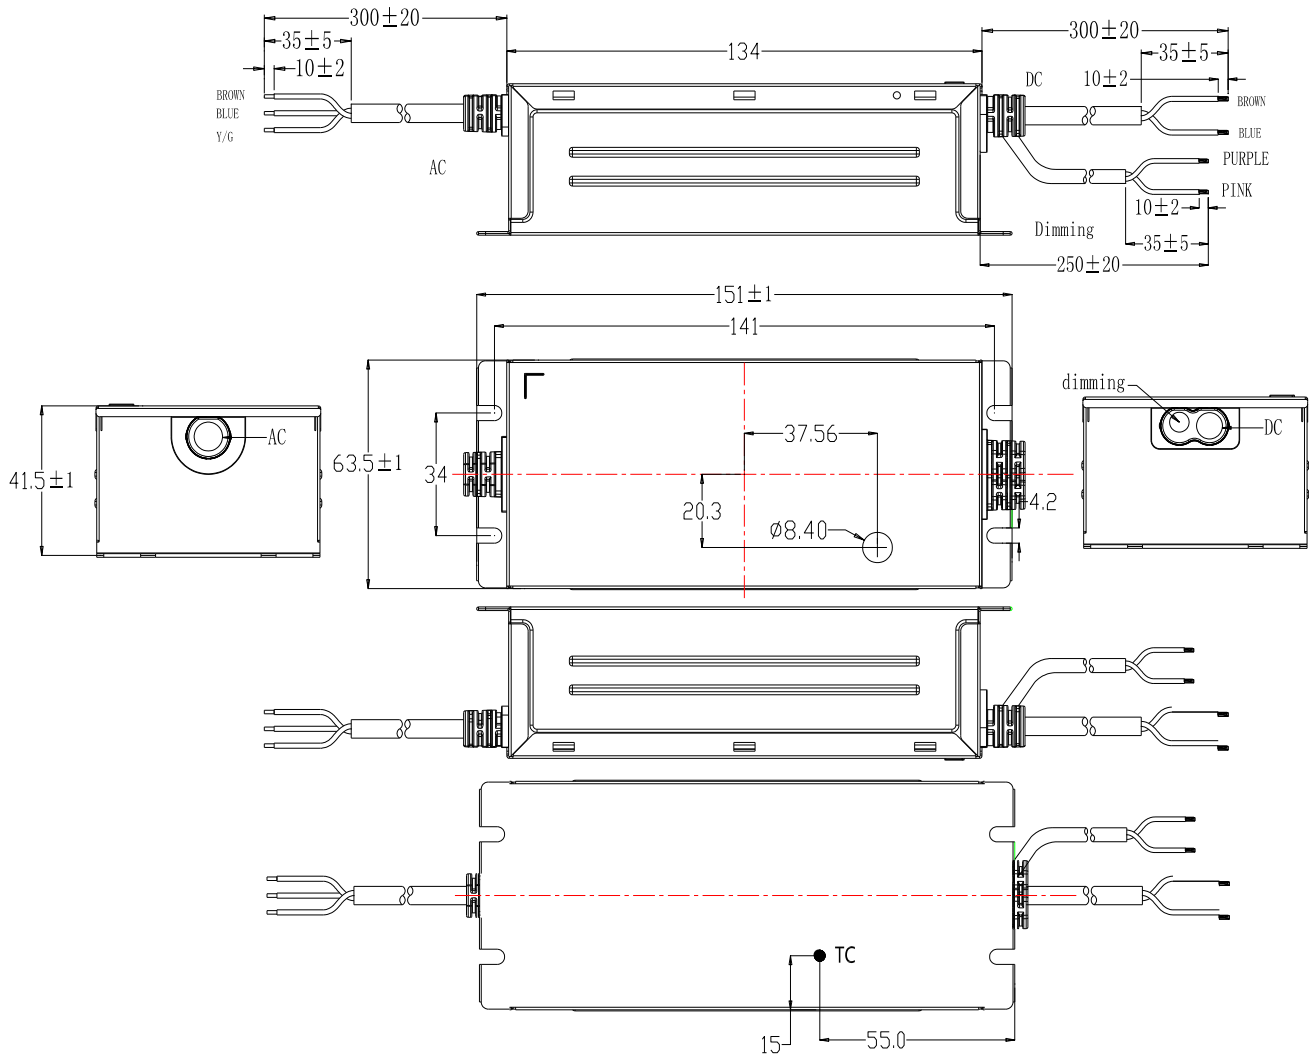

Wire	Specification	Note
Input	CCC+VDE H05RN-F 3x1.0mm ² external diameter: 7.3mm L=300±20mm	CCC/CE
Output	CCC+VDE H05RN-F 2x1.0mm ² external diameter: 6.9mm L=300±20mm	CCC/CE
Dimming	UL2733 22AWG*2C external diameter: 5.45mm L=250±20mm	X=M

LABEL:

54.50 mm

122.00 mm

Input

L Brown

G Y/G

N Blue

MOSO[®]

MNC-200M240

Constant current type
Integrated SPD

U_{out}(No Load): 290V $\equiv$

Input	100-277V~50/60Hz, 2.8A Max, Power: 230W.
Output	Output voltage: 170-240V $\equiv$; I _{rated} : 0.10-1.00A, Prated: 200W Max.

Output

t_c: 90°C Brown "+"

t_a: 55°C Blue "-"

Control signal
(0-10Vdc, PWM)
Dimming Range: 10%-100%

Purple DIM "+"

Pink DIM "-"

IP65
RoHS

TUV SUD
CE

MADE IN CHINA
For LED module only

SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD
No.1061, Songbai Road, Xili Town, Nanshan District,
Shenzhen, CHINA

Patented Product
Copyright reserved

S20000A02F01