



YSL12F SERIES 6W

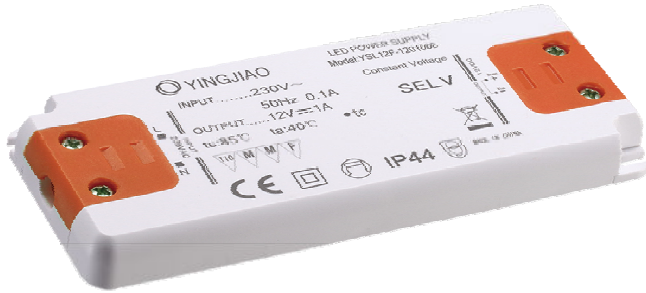

Input: 220-240V 50/60Hz
Output Voltage: 12V,24V,36V, 48V
Rated Power: 6W max


Features

- Independent Ultrathin Power Supply
- flicker-free Design
- Terminal block for Quick Connection
- Protections: Over Voltage, Overload, Short Circuit
- Class II Protection Design
- ERP :EU2019/2020

Application

- LED strips
- LED indoor lighting
- LED decorative lighting
- LED building lighting

■ Dimensions and Installation

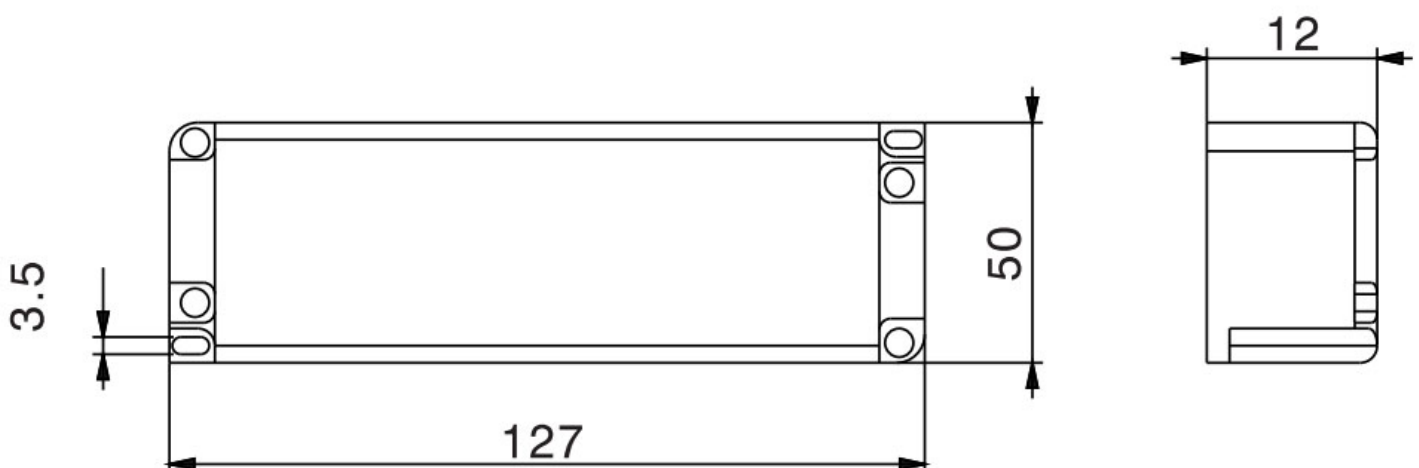


YSL12F SERIES 6W


MODEL DETAIL SPEC.		YSL12F-1201000	YSL12F-2400500	YSL12F-3600330	YSL12F-4800250
INPUT	Input Voltage:	220-240VAC			
	Range of input voltage:	198-264VAC			
	Input Frequency:	50-60Hz			
	Input current:	< 0.16A			
	Inrush Current:	65 Amps max. at 230VAC/50Hz,full load			
	Leakage Current:	< 0.25mA/240VAC			
	THD (Full load):	≤20%			
	Unload Power Consumption:	< 0.5W			
	Efficiency:	78%			
	Power Factor:	≥0.7@Full Load 220-240VAC			
OUTPUT	DC Voltage:	12V	24V	36V	48V
	Rated Current(Max):	1A	0.5A	0.33A	0.25A
	Rated Power(Max):	12W	12W	12W	12W
	Voltage Tolerance:	±5%			
	Ripple and Noise:	400mVp-p	400mVp-p	400mVp-p	400mVp-p
	Line Regulation:	±3%			
	Load Regulation:	±5%			
	Setup, Rise, Hold Up time:	1s, 10ms/60ms 230VAC 1000ms, 1ms/25ms 115VAC at full load			
ENVIRONMENTAL	Operating Temperature Ta:	-20 °C ~ +45°C			
	Storage Temp:	-40°C ~ +85°C			
	Maximum case temperature Tc:	+85°C			
	Humidity:	20 ~ 95% RH			
	Lifetime:	>30000hours@ta 40°C			
PROTECTION	Over Load:	Yes , Protection type: Auto Restore			
		Protection type: Hiccup mode, recovers automatically after fault condition is removed			
	Over Voltage:	Yes , Protection type: Auto Restore			
		Protection type: Shut down o/p voltage, re-power on to recover			
	Short Circuit:	Yes , Protection type: Auto Restore			
SAFETY & EMC	Safety Regulations:	EN61347-2-13:2014+A1:2017,EN61347-1:2015+A1:2021;EN62493:2015			
	Withstand Voltage:	I/P-O/P:3750KVAC			
	Harmonic	EN61000-3-2 Class II EN61000-3-3			
	EMI:	Compliance to EN55015			
	EMS:	compliance to 61547:2009			
OTHER	MTBF:	200,000 Hours Minimum at Full Load at 25°C Ambient			
	Case Material and Size:	Plastic			
	IP grade:	IP20			
	Size:	127*50*12mm			
	Weight:	50g / pcs			
	Packaging:	100PCS/CTN,36*28.5*25cm			

YSL12F SERIES 6W


Deduction Curve and Temperature

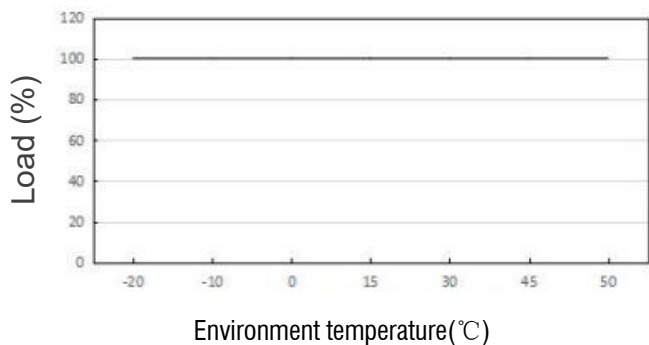


Minus Output and Input Voltage Curves

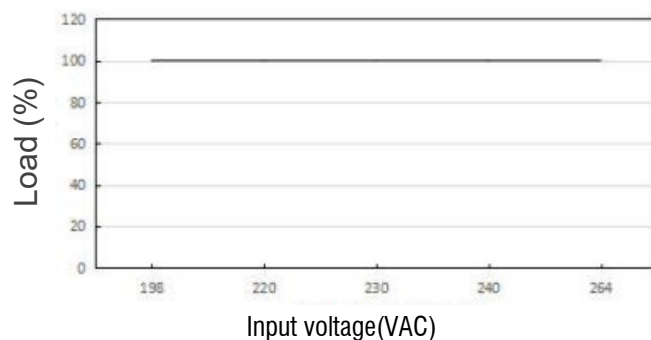


Power Factor (PF) Curves

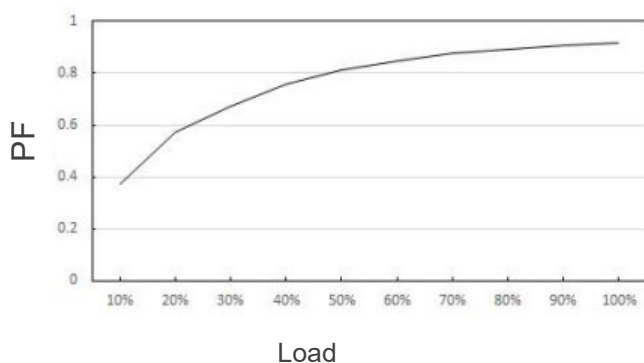

Efficiency Vs Load

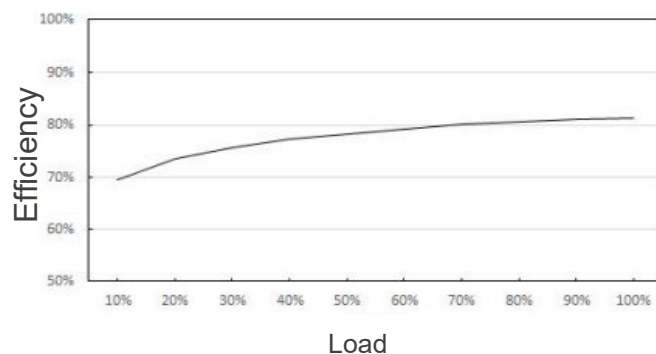

Wiring Diagram

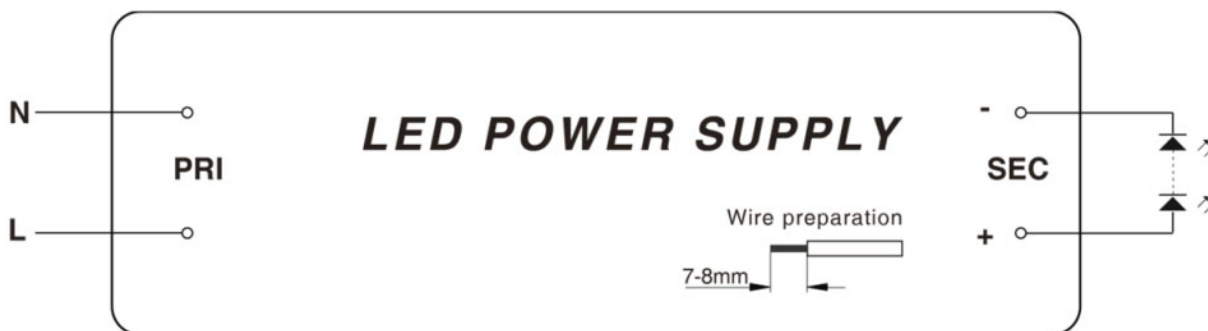

Manufacturer's address:

Cuijia, Xidian Town, Ninghai, Ningbo 315613, China

Tel: +86-574-87563856

[WWW.https://yingjiaodriver.com](https://yingjiaodriver.com)