



aM型电力保险丝 aM TYPE POWERFUSE

型号/尺寸 TYPE/SIZE	额定电流 CURRENT RATING	额定电压 VOLTAGE RATING	分断能力 BREAKING CAPACITY	安全认证 SAFETY APPROVALS		
				CCC	VDE	UR
HC08aM (8.5×31.5mm)	1A	400V	20KA	○	○	○
	2A	400V		○	○	○
	4A	400V		○	○	○
	5A	400V		○	○	○
	6A	400V		○	○	○
	8A	400V		○	○	○
	10A	400V		○	○	○
	12A	400V		○	○	○
	16A	400V		○	○	○
	20A	400V		○	○	○
HC10aM (10.3×38mm)	500mA	500V	120KA	○	○	○
	1A	500V		○	○	○
	2A	500V		○	○	○
	4A	500V		○	○	○
	6A	500V		○	○	○
	8A	500V		○	○	○
	10A	500V		○	○	○
	12A	500V		○	○	○
	16A	500V		○	○	○
	20A	500V		○	○	○
HC14aM (14.3×51mm)	25A	400V	120KA (500V) 80KA (690V)	○	○	○
	32A	400V		○	○	○
	2A	500V/690V		○	○	○
	4A	500V/690V		○	○	○
	6A	500V/690V		○	○	○
	8A	500V/690V		○	○	○
	10A	500V/690V		○	○	○
	12A	500V/690V		○	○	○
	16A	500V/690V		○	○	○
	20A	500V/690V		○	○	○
HC22aM (22.2×58mm)	25A	500V/690V	120KA (500V) 80KA (690V)	○	○	○
	32A	500V		○	○	○
	40A	500V		○	○	○
	50A	400V		○	○	○
	4A	500V/690V		○	○	○
	6A	500V/690V		○	○	○
	8A	500V/690V		○	○	○
	10A	500V/690V		○	○	○
	12A	500V/690V		○	○	○
	16A	500V/690V		○	○	○
HC22aM (22.2×58mm)	20A	500V/690V	120KA (500V) 80KA (690V)	○	○	○
	25A	500V/690V		○	○	○
	32A	500V/690V		○	○	○
	40A	500V/690V		○	○	○
	50A	500V/690V		○	○	○
	63A	500V/690V		○	○	○
HC22aM (22.2×58mm)	80A	500V	120KA	○	○	○
	100A	500V		○	○	○
	125A	400V		○	○	○

● DENOTES FOR APPROVED (● 表示已取得认证)

○ DENOTES FOR PENDING (○ 表示申请中)


电气特性 ELECTRICAL CHARACTERISTICS:

	4In	6.3In	8In	10In	12.5In	19In
$t_{\text{Operating}}$	—	60s	—	—	0.5s	0.1s
$t_{\text{Pre-arcing}}$	60s	—	0.5s	0.2s	—	—



尺寸 DIMENSIONS:

单位 Unit:mm

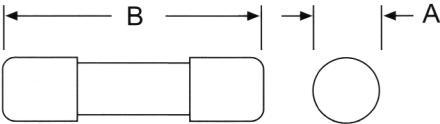

尺寸/型号 SIZE/TYPE	HC08aM	HC10aM	HC14aM	HC22aM
A	8.5	10.3	14.3	22.2
B	31.5	38.0	51.0	58.0

HC10aM平均 I-T 曲线图 (仅供参考)
HC10aM AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE)

