



TURBO



SILENT
OPERATION



30 000
h



5
YEARS
WARRANTY

SILENT				TURBO			
Ø100		Ø125		Ø100		Ø125	
26 dB	75 m ³ /h	32 dB	145 m ³ /h	36 dB	110 m ³ /h	42 dB	215 m ³ /h
5 W	26 Pa	9 W	28 Pa	13 W	40 Pa	18 W	62 Pa
m ³ /h		W		Pa		dB(A)	

	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4
KWT100CTR	44	77	87	110	5	8	9	14	10	26	32	40	19	30	34	36
KWT125CTR	67	100	150	215	6	9	12	19	6	13	27	62	19	26	34	42



GŁÓWNE CECHY / MAIN FEATURES

- *Silent* cicha praca / silent operation
- *turbo* wysoka wydajność wymiany powietrza / high air exchange capacity
- tworzywo ABS / ABS plastic
- łożyska kulkowe / ball bearings
- IPX4
- maksymalna temperatura pracy 40°C / maximum operating temperature 40°C
- możliwość instalacji na ścianie i suficie* / wall and ceiling installation allowed*
- 5 lat gwarancji / 5 years warranty
- możliwość zainstalowania zaworu zwrotnego (ZZ) / non-return valve (ZZ) usage ability

WYPOSAŻENIE / EQUIPMENT



Easy Clip



Kostka
Terminal block



Włącz. pociągany
Pull switch



Wył. czasowy
Timer



Czujnik wilgoci
Humidity sensor




Regulator obrotów
i czasu pracy
Time and speed
governor



Mikrofalowy
czujnik ruchu
Microwave
motion sensor

WYMIARY / DIMENSIONS

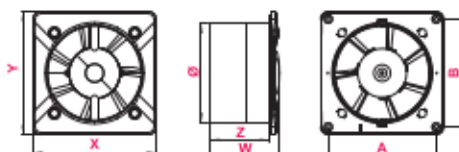

	Ø	A	B	X	Y	W	Z
Ø100	100	109	109	128	128	88	77
Ø125	125	137	137	156	156	88	77

	<i>Silent</i>	<i>turbo</i>							
	INDEX	INDEX							
Ø100	KWS100	KWT100	●						
	KWS100W	KWT100W		●					
	KWS100T	KWT100T			●				
	KWS100H	KWT100H			●	●			
	KWS100M	KWT100M			●		●		●
Ø125	KWS125	KWT125	●						
	KWS125W	KWT125W		●					
	KWS125T	KWT125T			●				
	KWS125H	KWT125H			●	●			
	KWS125M	KWT125M			●		●		●



ŁOŻYSKA KULKOWE
Ball bearings



4 KOŁKI ROZPOROWE I WKRETY
4 rawplugs and screws