


SPECIAL BUTTON CELL LITHIUM - CR1616

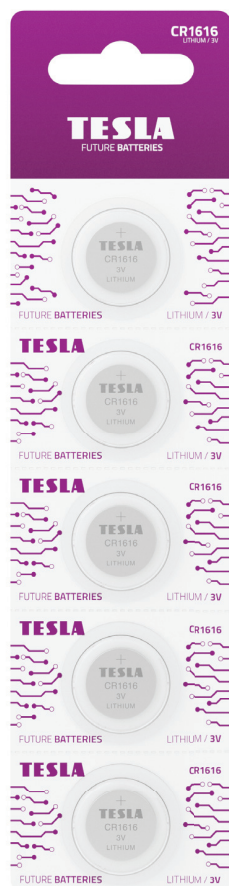

DESCRIPTION:

Mercury Free Lithium Cell Battery,
CR1616 / Non-Rechargeable

CHEMICAL SYSTEM:

Lithium Manganese Dioxide

SHELF LIFE:

7 years

NOMINAL VOLTAGE:

3 Volts

NOMINAL DIMENSIONS:

Ø 16 mm × 1.6 mm

APPLICATIONS:

Suitable for flashlights, car keys, watches,
scanners etc.

STORAGE TEMPERATURE:

+10 °C to + 25 °C

Should be stored in dry and cool place.

NOMINAL WEIGHT:

1,2 g

CROSS REFERENCES:

TESLA	IEC	JIS	VARTA	DURACELL
CR1616	CR1616	CR1616	CR1616	DL1616

TYPICAL SERVICE LIFE:

DISCHARGE RESISTANCE	DISCHARGE CONDITION	END POINT VOLTAGE	SERVICE LIFE
15 kOhms	24 Hrs/Day	2.0V	230 Hrs