



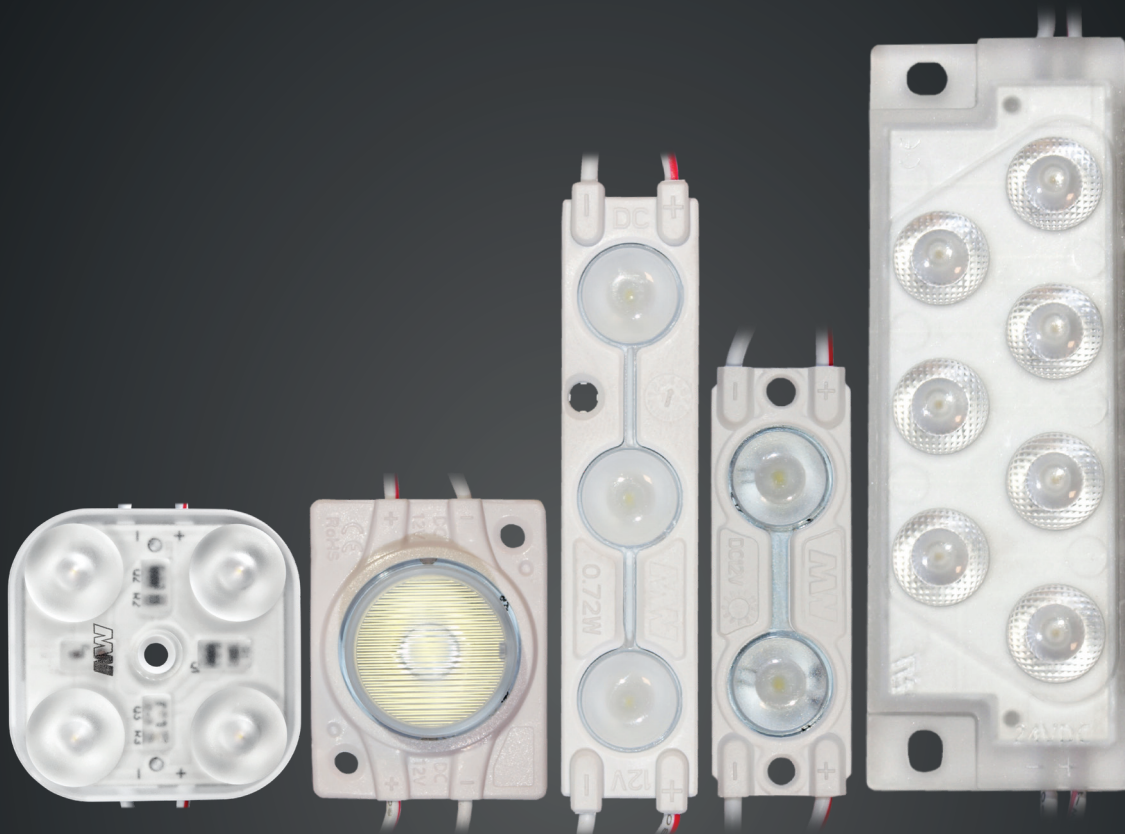

LED MODULES

for SIGNAGE & POS SYSTEM



2024

ABOUT US

MW LIGHTING



MW Lighting brand specializes in providing professional LED products both for advertising and visual communication as well as for professional lighting contractors in residential and public spaces. That is why MW Lighting provides the highest quality products.

The aim of MW Lighting is to provide professionals with a product that meets current standards and norms, tested for use in various applications.

Our advantages:

- High quality products targeted at professionals;
- Good availability and short lead times (own large storage areas);
- A well-developed distribution network throughout the EU;
- Expert advice;
- Long warranty period;
- Competitive prices.

The products in our offer are selected according to the needs of European market. We offer products of the highest quality, for which we give customers up to 7 years warranty, which proves the highest quality of components used in the production process.

For projects requiring cost reduction, MW Lighting brand has prepared a series of products in economic versions.

On our website you will find full technical documentation and contacts to advisors. At your disposal is a professional staff, which in the most convenient way for you (by phone, e-mail or even in person) will advise you on optimal solutions for the needs of your projects.

CONTENTS

PRODUCTS

MW-SAMSUNG-3W	5
MW-MLD-HE-1X-LENS170	6
MW-MLD-HE-2X-LENS170	7
MW-MLD-HE-3X-LENS170	8
MW-MLD-HE-4X-LENS170	9
MW-MLD-2835-1W-LENS	10
MW-MLD-2835-2X-LENS	11
MW-MLD-2835-3X-LENS	12
MW-MLD-2835-4X-LENS	13
MW-MLD-3030-1X-LENS	14
MW-MLD-3535-3W-LENS-C1	15
MISSOURI-1W	16
PROLED-MINI-2X-CC070	17
PROLED-MINI-3X-CC100	18
PROLED-1X-CC100	19
PROLED-2X-CC180	20
PROLED-3X-CC220	21

PROLED24-3X-CC220	22
PROLED-4X-CC260	23
TEXAS-2W	24
TEXAS-3X	25-26
ALASKA-1W	27
NEBRASKA-1W	28
NEVADA-3X	29
MW-MLD-MINI-1W-LENS160	30
MW-MLD-5050-3RGBW	31
MW-MLD-CCT-2WW/W-LENS-24V	32
MINIOVAL-1X	33
BoxSide-OVAL-S-W	34
BoxSide-OVAL-M-W	35
BoxSide-OVAL-L-W	36
MW-MLD-FLAT-1X-LENS170	37
MW-MLD-PIXEL-1X	38

SUGGESTED

DEPTH (cm)

	2.5	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
MW-SAMSUNG-3W							8	9	10	11	12	13	14	15	16	17	18	19	20										
MW-MLD-HE-1X-LENS170			4	5	6	7	8																						
MW-MLD-HE-2X-LENS170							8	9	10	11	12	13	14	15															
MW-MLD-HE-3X-LENS170									10	11	12	13	14	15	16	17	18	19	20										
MW-MLD-HE-4X-LENS170												13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
MW-MLD-2835-1W-LENS		3	4	5	6	7	8	9	10																				
MW-MLD-2835-2X-LENS		3	4	5	6	7	8	9	10																				
MW-MLD-2835-3X-LENS							8	9	10	11	12	13	14	15	16	17	18	19	20										
MW-MLD-2835-4X-LENS									10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25					
MW-MLD-FLAT-1X-LENS170		3	4	5	6	7	8	9	10																				
MW-MLD-MINI-1W-LENS160				5	6	7	8																						
MW-MLD-CCT-2WW/W-LENS-24V				5	6	7	8	9	10	11	12	13	14	15															
MW-MLD-5050-3RGBW							8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25					
MINIOVAL-1W	2.5	3	4	5	6	7	8																						
MISSOURI-1W			4	5	6	7	8	9	10	11	12	13	14	15															
TEXAS-2W				5	6	7	8	9	10	11	12	13	14	15															
TEXAS-3X				5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
NEVADA-3X							8	9	10	11	12	13	14	15	16	17	18	19	20										
ProLED-MINI-2X-CC070		3	4	5	6	7	8	9	10	11	12	13	14	15															
ProLED-MINI-3X-CC100		3	4	5	6	7	8	9	10	11	12	13	14	15															
ProLED-1X-CC100		3	4	5	6	7	8																						
ProLED-2X-CC180				5	6	7	8	9	10	11	12	13	14	15															
ProLED-3X-CC220									10	11	12	13	14	15	16	17	18	19	20										
ProLED24-3X-CC220									10	11	12	13	14	15	16	17	18	19	20										
ProLED-4X-CC260														15	16	17	18	19	20	21	22	23	24	25					

MW-SAMSUNG-3W

for lightboxes 8 - 20 cm depth

Features



- SMD LED mounted in Korea
- KS, CE, CB, IECEE, UL, SIRC (SASO) certificated
- Technical size & compact design
- Safe & stable operation with DC12 V (constant - voltage)
- Humid & water - proof: passed IP68
- Easy installation with tape & screw with 3 mm bolts

Application

- Back lighting for signage & channel letter
- Outdoor lighting: advertising
- Indoor lighting: house, office, hospital, bank, school etc.
- Public lighting: road signs, direction signs
- Decorative lighting: sculpture, tower
- Business lighting: storefront (store window), shelf, showcase
- Vehicle lighting: vans, caravans, trailers, lorries
- Architectural lighting



Power supply	12 W	18 W	24 W	35 W	60 W	75 W	100 W	150 W	200 W
Number of modules	10	15	20	30	50	60	83	100	160

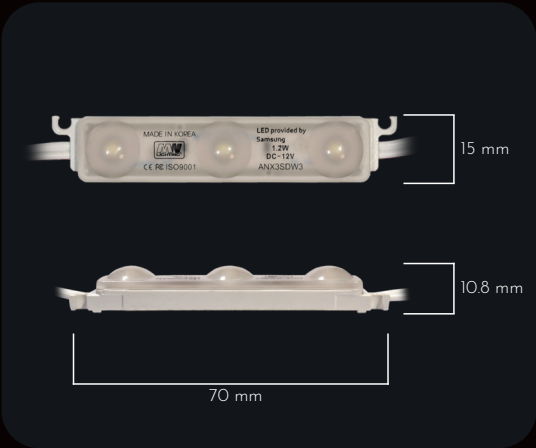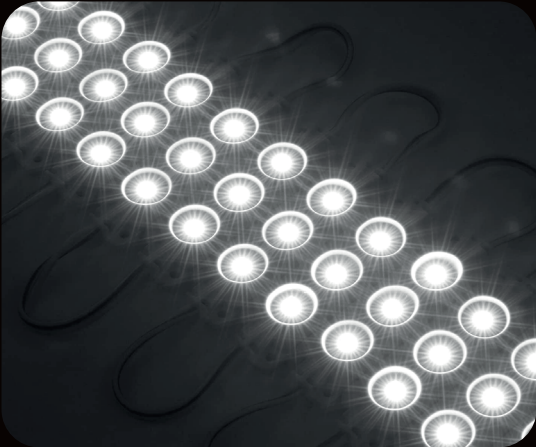

Supply	Model	MW-SAMSUNG-3W
	Rated voltage	12 V DC
	Power per module	1.2 W
	Current per 1 module	100 mA
Diodes	Chain power consumption	60 W
	Chain length	50 pcs / 7.8 m
	Color temperature	White (6500K)
	Luminous flux	95 lm
	Flux density	79 lm/W
	Lens	165°
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
Wires	Screw terminal	Yes
	Wire length	90 mm
	Center - center length	160 mm
Environment	Wires	White - red (+), White (-)
	IP protection	IP68
Dimension	Temperature	Working: -30°C ... +70°C
	Height, width, length	10.8 x 15 x 70 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	200 / 2000 pcs



MW-MLD-HE-1X-LENS170

for lightboxes 4 - 8 cm depth


X - color of light: W, NW, WW or CW

Features

- High efficiency 153 lm/W
- 3 MacAdam ellipse each bin
- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 7 years warranty

Application


- Chanel letters
- lightboxes backlight, depth of 4 - 8 cm (1LED)

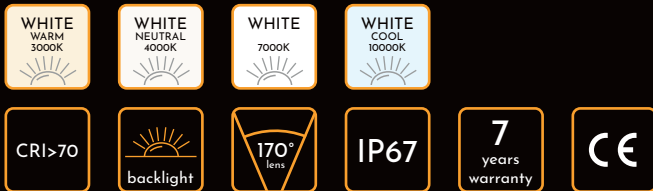

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	30	45	60	90	125	150	188	250	300	375	500	750

6

Supply	Model	MW-MLD-HE-1X-LENS170
	Rated voltage	12 V DC +/- 5%
	Power per module	0.36 W
	Current per 1 module	30 mA
Diodes	Chain power consumption	14.4 W
	Chain length	40 pcs / 5.8 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux	55 lm
	Flux density	153 lm/W
	Lens	170°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	120 mm
	Center - center length	145 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	10.5 x 16.3 x 25.2 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS, PC Cover
	Pcs in bag / box	200 / 2000 pcs

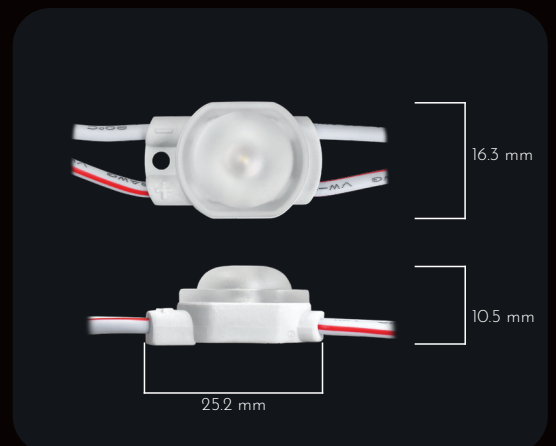

MW-MLD-HE-2X-LENS170

for lightboxes 8 - 15 cm depth
X - color of light: W, NW, WW or CW

Features


- High efficiency 118 lm/W
- 3 MacAdam ellipse each bin
- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 7 years warranty

Application

- Chanel letters
- lightboxes backlight, depth of 8 - 15 cm (2LED)



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

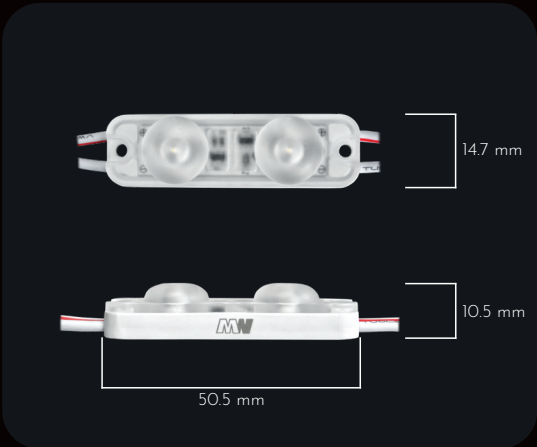

Supply	Model	MW-MLD-HE-2X-LENS170
	Rated voltage	12 V DC +/- 5%
	Power per module	0.72 W
	Current per 1 module	60 mA
Diodes	Chain power consumption	21.6 W
	Chain length	30 pcs / 5 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux	85 lm
	Flux density	118 lm/W
	Lens	170°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	99.5 mm
	Center - center length	150 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	10.5 x 14.7 x 50.5 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS, PC Cover
	Pcs in bag / box	150 / 1500 pcs



MW-MLD-HE-3X-LENS170

for lightboxes 10 - 20 cm depth

X - color of light: W, NW, WW or CW

Features

- High efficiency 139 lm/W
- 3 MacAdam ellipse each bin
- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 7 years warranty

Application


- Chanel letters
- lightboxes backlight, depth of 10 - 20 cm (3LED)



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	11	17	23	34	47	56	70	94	113	141	188	281

8

Supply	Model	MW-MLD-HE-3X-LENS170
	Rated voltage	12 V DC +/- 5%
	Power per module	0.9 W
	Current per 1 module	75 mA
Diodes	Chain power consumption	22.5 W
	Chain length	25 pcs / 5 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux	125 lm
	Flux density	139 lm/W
	Lens	170°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	107 mm
	Center - center length	180 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	10.5 x 14.7 x 72.7 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS, PC Cover
	Pcs in bag / box	100 / 1000 pcs

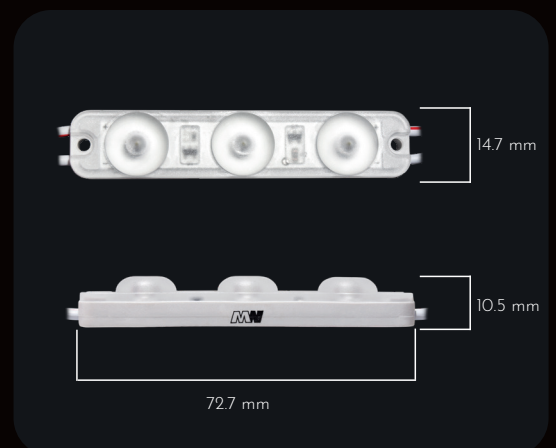

MW-MLD-HE-4X-LENS170

for lightboxes 13 - 30 cm depth
X - color of light: W, NW, WW or CW

Features


- High efficiency 115 lm/W
- 3 MacAdam ellipse each bin
- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 7 years warranty

Application

- Chanel letters
- lightboxes backlight, depth of 13 - 30 cm (4LED)



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	5	8	11	16	23	27	34	45	54	68	90	135

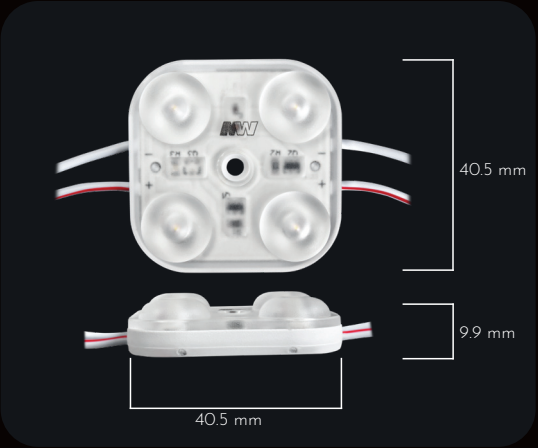

Supply	Model	MW-MLD-HE-4X-LENS170
	Rated voltage	24 V DC +/- 5%
	Power per module	1.92 W
	Current per 1 module	80 mA
Diodes	Chain power consumption	38.4 W
	Chain length	20 pcs / 5 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux	220 lm
	Flux density	115 lm/W
	Lens	170°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	215 mm
	Center - center length	255 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	9.9 x 40.5 x 40.5 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS, PC Cover
	Pcs in bag / box	60 / 600 pcs



MW-MLD-2835-1W-LENS

for lightboxes 3 - 10 cm depth

Features

- IP 67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application

- Letters of light
- Advertising boxes with a depth of 3 - 10 cm
- POS systems
- Backlighting of furniture

WHITE
6500K

CRI>70



5
years
warranty



IP67

CE

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	23	34	45	68	94	113	141	188	225	281	375	563

10

	Model	MW-MLD-2835-1W-LENS
	Rated voltage	12 V DC +/- 5%
Supply	Power per module	0.3 W
	Current per 1 module	25 mA
	Chain power consumption	15 W
	Chain length	50 pcs / 4.2 m
Diodes	Color temperature	White (6500K)
	Luminous flux	33 lm
	Flux density	110 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	60 mm
	Center - center length	90 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	6 x 16 x 30 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	200 / 4200 pcs

MW-MLD-2835-2X-LENS


for lightboxes 3 - 10 cm depth
X - color of light: W, NW, WW, CW, R, G, B or Y

Features

- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application

- Letters of light
- lightboxes backlight, depth of 3 - 10 cm (2LED)
- POS systems
- Backlighting of furniture

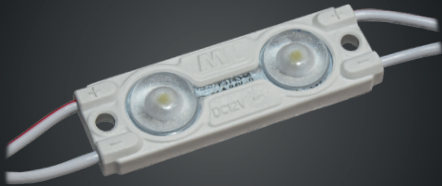

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	23	34	45	68	94	113	141	188	225	281	375	563

RED
620 - 630 nm

GREEN
520 - 530 nm

BLUE
460 - 470 nm

YELLOW
588 - 594 nm

WHITE WARM
3000K

WHITE NEUTRAL
4000K

WHITE
6500K

WHITE COOL
12000K

CE


IP67

5 years warranty


160° lens

backlight

CRI>80

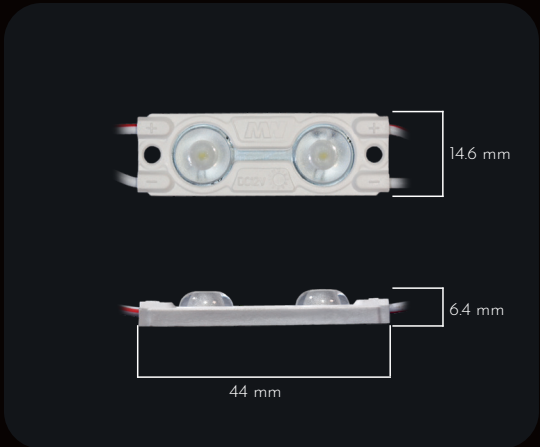

Supply	Model	MW-MLD-2835-2X-LENS
	Rated voltage	12 V DC +/- 5%
	Power per module	0.48 W
	Current per 1 module	40 mA
	Chain power consumption	24 W
Diodes	Chain length	50 pcs / 5.3 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (6500K) CW - Cold White (12000K) R - Red (620 - 630 nm) G - Green (520 - 530 nm) B - Blue (460 - 470 nm) Y - Yellow (588 - 594 nm)
	Luminous flux	46 lm
	Flux density	96 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	65 mm
	Center - center length	110 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	6.4 x 14.6 x 44 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	200 / 1600 pcs

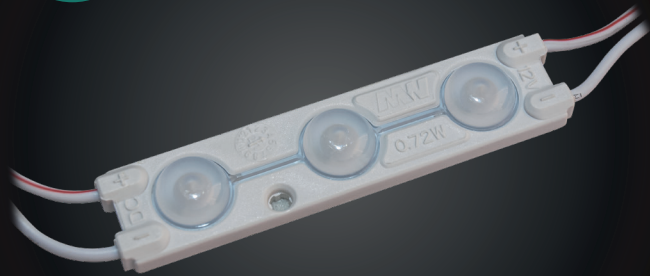

MW-MLD-2835-3X-LENS

for lightboxes 8 - 20 cm depth


X - color of light: W, NW, WW, CW, R, G, B or Y

Features

- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application


- Letters of light
- Advertising boxes with a depth of 8 - 20 cm (3LED)
- POS systems
- Backlighting of furniture



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

12

Supply	Model	MW-MLD-2835-3X-LENS
	Rated voltage	12 V DC +/- 5%
	Power per module	0.72 W
	Current per 1 module	60 mA
Diodes	Chain power consumption	28.8 W
	Chain length	40 pcs / 6.6 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (6500K) CW - Cold White (12000K) R - Red (620 - 630 nm) G - Green (520 - 530 nm) B - Blue (460 - 470 nm) Y - Yellow (588 - 594 nm)
	Luminous flux	60 lm (WW, NW, W, CW)
	Flux density	84 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	112 mm
	Center - center length	175 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	6 x 15 x 63 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	160 / 2560 pcs

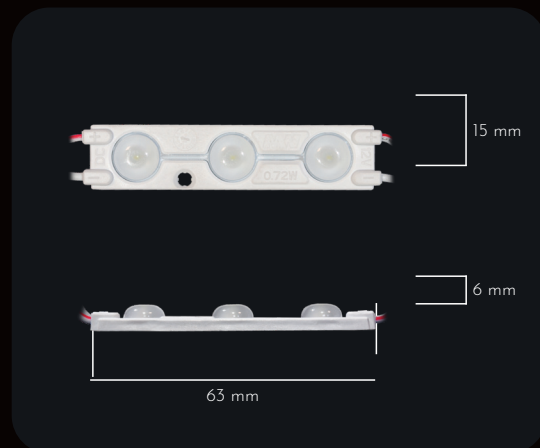

MW-MLD-2835-4X-LENS

for lightboxes 10 - 25 cm depth
X - color of light: W, WW, NW or CW

Features

- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application

- Letters of light
- lightboxes backlight, depth of 10 - 25 cm (4LED)
- POS systems
- Backlighting of furniture



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	9	14	18	27	38	45	56	75	90	113	150	225

WHITE
WARM
3000K

WHITE
NEUTRAL
4000K

WHITE
6500K

WHITE
COOL
12000K

CE


IP67

5
years
warranty

160°
lens

backlight

CRI>80

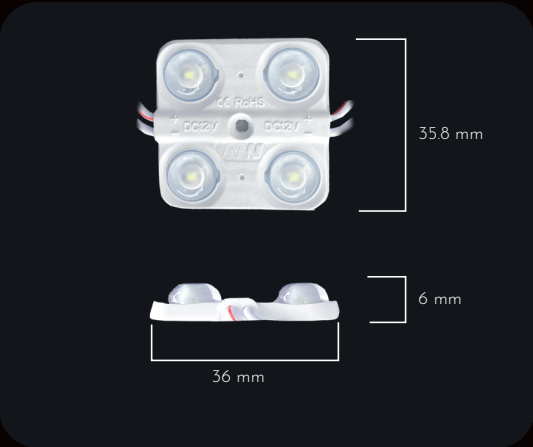

Supply	Model	MW-MLD-2835-4X-LENS
	Rated voltage	12 V DC +/- 5%
	Power per module	1.2 W
	Current per 1 module	100 mA
Diodes	Chain power consumption	36 W
	Chain length	30 pcs / 6.2 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (6500K) CW - Cold White (12000K)
	Luminous flux	115 lm
	Flux density	96 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	185 mm
	Center - center length	220 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	6 x 36 x 35.8 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	90 / 1440 pcs



MW-MLD-3030-1X-LENS

for lightboxes 10 - 20 cm depth


X - color of light: W, NW, WW or CW

Features

- IP67 waterproof sealed, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application



- Letters of light
- Double sided advertising boxes, lightboxes
- POS systems
- Backlighting of furniture

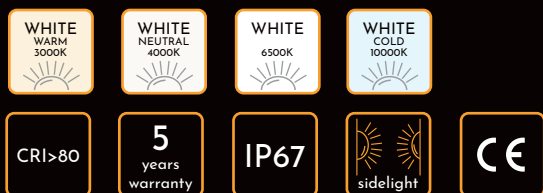

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	8	11	15	23	31	38	47	63	75	94	125	188

14

Supply	Model	MW-MLD-3030-1X-LENS
	Rated voltage	12 V DC +/- 5%
	Power per module	1.5 W
	Current per 1 module	125 mA
	Chain power consumption	45 W
Diodes	Chain length	30 pcs / 4.6 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (6500K) CW - Cold White (10000K)
	Flux density	125 lm
	Flux density	83 lm/W
	Lens	15° x 55°*
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	107 mm
	Center - center length	150 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	12.5 x 36 x 43 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	60 / 600 pcs

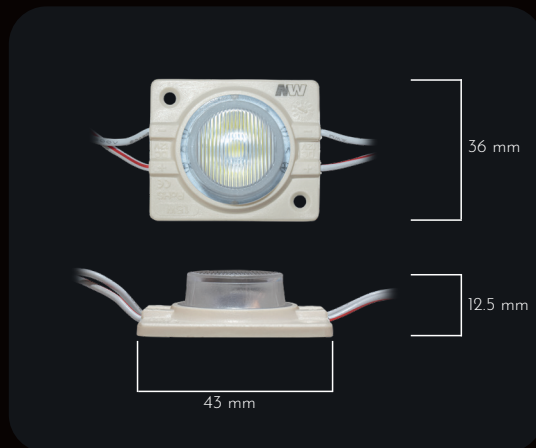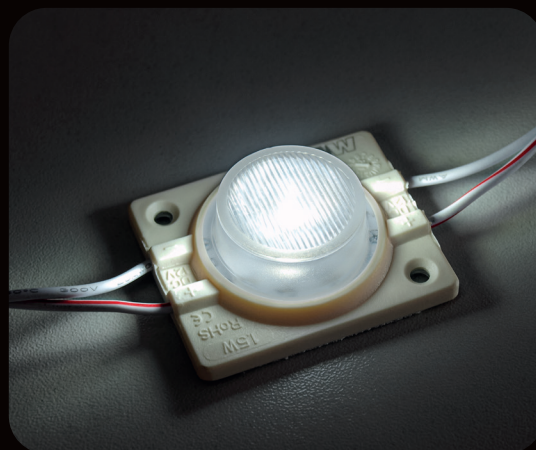

*depending on the vertical or horizontal arrangement

MW-MLD-3535-3W-LENS-C1


for lightboxes min. 12 - 30 cm depth

Features

- IP67 waterproof sealed, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application

- Letters of light
- Double sided advertising boxes, lightboxes
- POS systems
- Backlighting of furniture

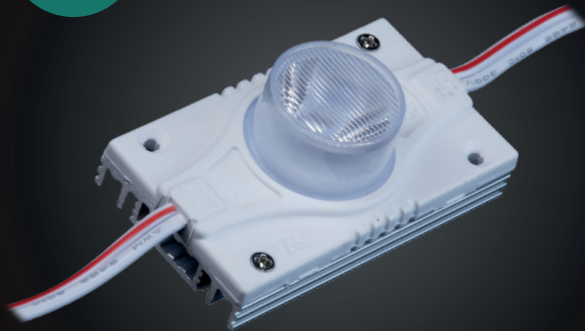


Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	4	5	7	11	15	18	23	30	36	45	60	90



Supply	Model	MW-MLD-3535-3W-LENS-C1
	Rated voltage	12 V DC +/- 5%
	Power per module	3 W
	Current per 1 module	250 mA
Diodes	Chain power consumption	60 W
	Chain length	20 pcs / 3.8 m
	Color temperature	White (6500K)
	Luminous flux	315 lm
	Flux density	105 lm/W
	Lens	20° x 40°*
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
Wires	Screw terminal	Yes
	Wire length	143 mm
	Center - center length	200 mm
Environment	Wires	White - red (+), White (-)
	IP protection	IP67
Dimension	Temperature	Working: -25°C ... +55°C
	Height, width, length	15.3 x 33 x 57 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	20 / 320 pcs

15

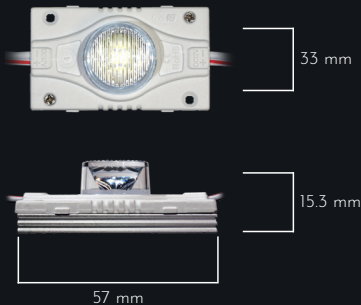

*depending on the vertical or horizontal arrangement



MISSOURI-1W

for lightboxes 4 - 15 cm depth

Features

- Uniformity optical performance at high LED module distance thanks to excellent lens design
- 100 lm / module (6500K)
- 5 years warranty

Application

- Signage and illuminated advertising
- Back-lighting for medium light box, channel letter

WHITE
6500K

CRI>80

5
years
warranty

IP66

backlight

170°
lens

CE

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	11	17	22	33	46	55	69	92	110	138	183	280

16

Supply	Model	MISSOURI-1W
	Rated voltage	12 V DC
	Power per module	1 W
	Current per 1 module	83 mA
	Chain power consumption	30 W
Diodes	Chain length	30 pcs
	Color temperature	White (6500K)
	Flux density	90 lm
	Flux density	90 lm/W
	Lens	170°
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	188 mm
	Center - center length	221 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP66
	Temperature	Working: -25°C ... +60°C
Dimension	Height, width, length	10 x 23 x 33 mm
Montage	Adhesive tape	Yes
	Mounting screw	No
	Hole size	2.8 mm
Other	Case material	PVC
	Pcs in bag / box	90 / 2160 pcs

ProLED-MINI-2X-CC070

for lightboxes 3 - 15 cm depth
X - color of light: W, WW, NW or CW

Features


- IP67 waterproof, injection molded
- Special design for low depth 3D letters
- Internal 140 deg lens
- 7 years warranty

Application

- Backlight in indoor and outdoor lightboxes
- Lightboxes with 3 - 15 cm depth



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	22	32	43	65	90	108	135	180	216	270	360	540

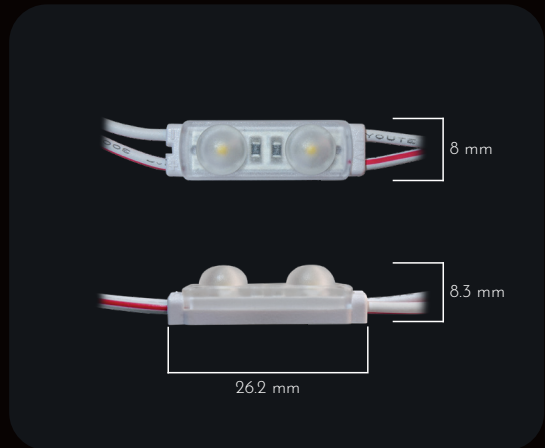

Supply	Model	PROLED-MINI-2X-CC070
	Rated voltage	12 V DC
	Power per module	0.5 W
	Current per 1 module	42 mA
	Chain power consumption	25 W
Diodes	Chain length	50 pcs / 3.5 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	70 lm
	Flux density	140 lm/W
	Lens	140°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	44 mm
	Center - center length	70 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	8.3 x 8 x 26.2 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	-
Other	Case material	ABS
	Pcs in bag / box	200 / 5000 pcs



ProLED-MINI-3X-CC100

for lightboxes 3 - 15 cm depth

X - color of light: W, WW, NW or CW

Features

- IP67 waterproof, injection molded
- Special design for low depth 3D letters
- Internal 140 deg lens
- 7 years warranty

Application


- Backlight in indoor and outdoor lightboxes
- Lightboxes with 3 - 15 cm depth



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

18

Supply	Model	PROLED-MINI-3X-CC100
	Rated voltage	12 V DC
	Power per module	0.72 W
	Current per 1 module	60 mA
	Chain power consumption	36 W
Diodes	Chain length	50 pcs / 3.5 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	WW, NW, CW - 65 lm W - 72 lm
	Flux density	WW, NW, CW - 90 lm/W W - 100 lm/W
	Lens	140°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	69 mm
	Center - center length	100 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	8.3 x 8 x 31.2 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	-
Other	Case material	ABS
	Pcs in bag / box	200 / 5000 pcs

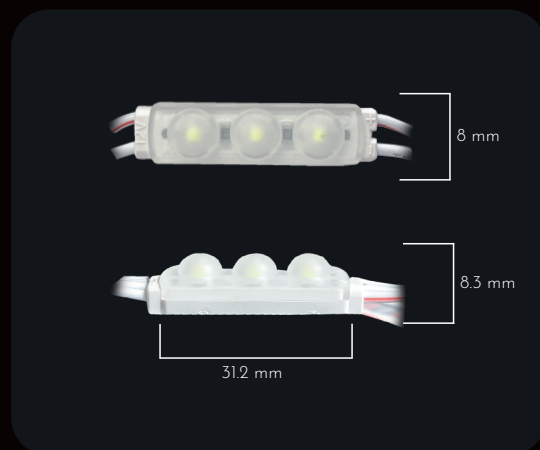

ProLED-1X-CC100

for lightboxes 3 - 8 cm depth
X - color of light: W, WW, CW or NW

Features



- IP67 waterproof, injection molded
- Microlens front side design
- Internal 175 deg lens
- 7 years warranty

Application

- Backlight in indoor and outdoor lightboxes
- Lightboxes with 3 - 8 cm depth



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	30	45	60	90	125	150	188	250	300	375	500	750

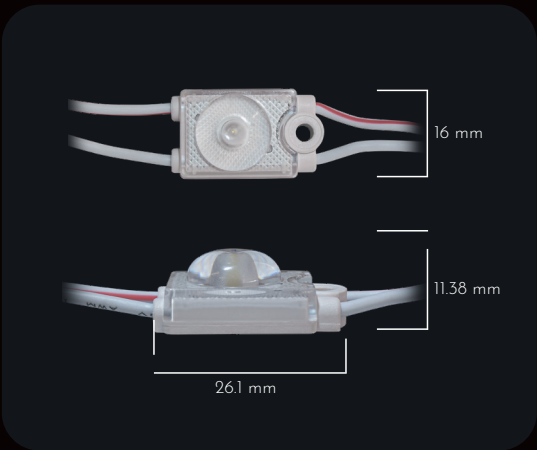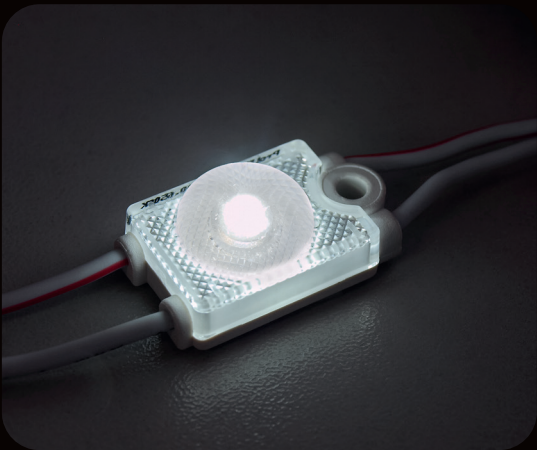

Supply	Model	PROLED-1X-CC100
	Rated voltage	12 V DC
	Power per module	0.36 W
	Current per 1 module	30 mA
	Chain power consumption	7.2 W
Diodes	Chain length	20 pcs / 5.1 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	WW, NW, CW - 58 lm W - 60 lm
	Flux density	WW, NW, CW - 161 lm/W W - 167 lm/W
	Lens	175°
	Lifetime	L70B50 > 50k hrs
	Connection	Soldering Screw terminal
Wires	Wire length	74 mm
	Center - center length	100 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +60°C
Dimension	Height, width, length	11.38 x 16 x 26.1 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 pcs / 2800



ProLED-2X-CC180

for lightboxes 5 - 15 cm depth

X - color of light: W, WW, CW or NW

Features

- IP67 waterproof, injection molded
- Microlens front side design
- Internal 175 deg lens
- 7 years warranty

Application


- Backlight in indoor and outdoor lightboxes
- Lightboxes with 5 - 15 cm depth



Power supply	12 W	18 W	24 W	35 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

20

Supply	Model	PROLED-2X-CC180
	Rated voltage	12 V DC
	Power per module	0.78 W
	Current per 1 module	65 mA
	Chain power consumption	15.6 W
Diodes	Chain length	20 pcs / 5.4 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	105 lm (W) 116 lm (WW, NW, CW)
	Flux density	135 lm/W (W) 161 lm/W (WW, NW, CW)
	Lens	175°
	Lifetime	L70B50 > 50k hrs
	Connection	
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	130 mm
	Center - center length	180 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +60°C
Dimension	Height, width, length	11.15 x 16 x 50.1 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 1600 pcs

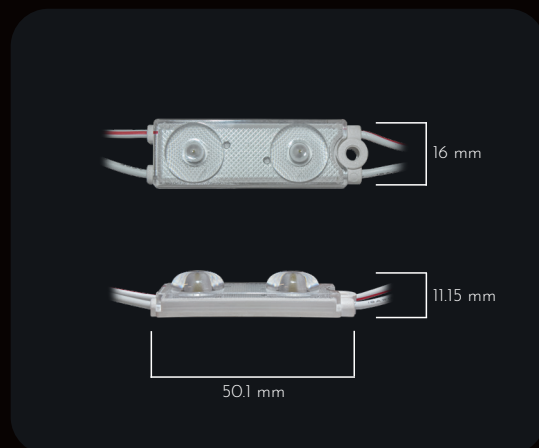

ProLED-3X-CC220

for lightboxes 10 - 20 cm depth
X - color of light: W, WW, CW or NW

Features


- IP67 waterproof, injection molded
- Microlens front side design
- Internal 175 deg lens
- 7 years warranty

Application


- Backlight in indoor and outdoor lightboxes
- Lightboxes with 10 - 20 cm depth



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	10	15	20	30	42	50	63	83	100	125	167	250

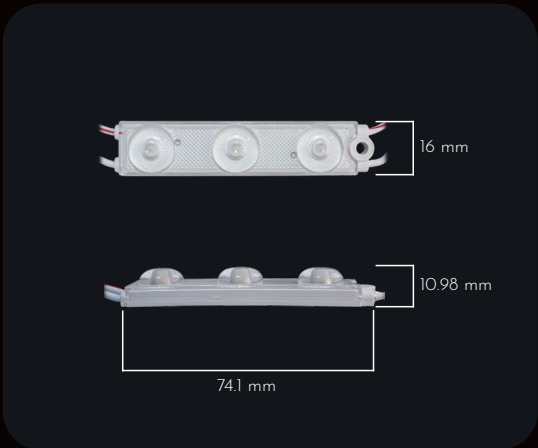

Supply	Model	PROLED-3X-CC220
	Rated voltage	12 V DC
	Power per module	1.08 W
	Current per 1 module	90 mA
	Chain power consumption	21.6 W
Diodes	Chain length	20 pcs / 4.4 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	174 lm
	Flux density	161 lm/W
	Lens	175°
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	150 mm
	Center - center length	220 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +60°C
Dimension	Height, width, length	10.98 x 16 x 74.1 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 1200 pcs

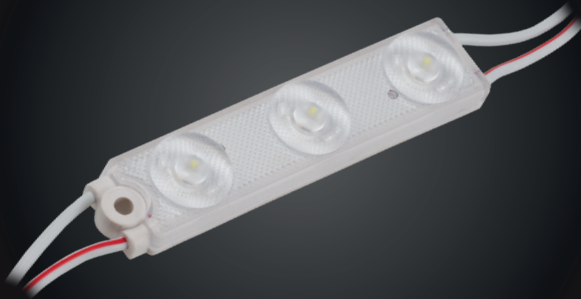

ProLED24-3X-CC220

for lightboxes 10 - 20 cm depth

X - color of light: W, WW, CW or NW

Features

- IP67 waterproof, injection molded
- Microlens front side design
- Internal 175 deg lens
- 7 years warranty

Application


- Backlight in indoor and outdoor lightboxes
- Lightboxes with 10 - 20 cm depth



Power supply	12 W	18 W	24 W	35 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	10	15	20	30	42	50	63	83	100	125	167	250

22

Supply	Model	PROLED24-3X-CC220
	Rated voltage	24 V DC
	Power per module	1.08 W
	Current per 1 module	45 mA
	Chain power consumption	21.6 W
Diodes	Chain length	20 pcs / 4.4 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	174 lm
	Flux density	161 lm/W
	Lens	175°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	150 mm
	Center - center length	220 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +60°C
Dimension	Height, width, length	10.98 x 16 x 74.1 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 1200 pcs

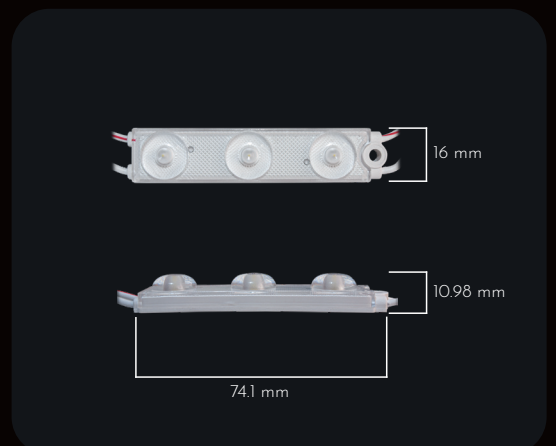

ProLED-4X-CC260

for lightboxes 15 - 25 cm depth
X - color of light: W, WW, CW or NW

Features

- IP67 waterproof, injection molded
- Microlens front side design
- Internal 175 deg lens
- 7 years warranty



Application

- Backlight in indoor and outdoor lightboxes
- Lightboxes with 15 - 25 cm depth



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	8	11	15	23	31	38	47	63	75	94	125	188

WHITE WARM 3000K 	WHITE NEUTRAL 4000K 	WHITE 7000K 	WHITE COLD 10000K 
IP67	 backlight	standard CRI>80	special CRI>90 CRI>95

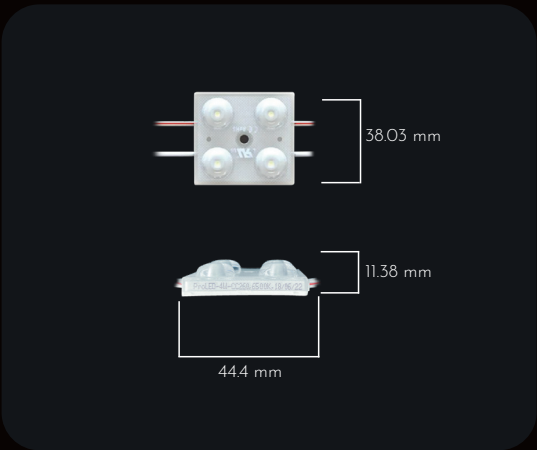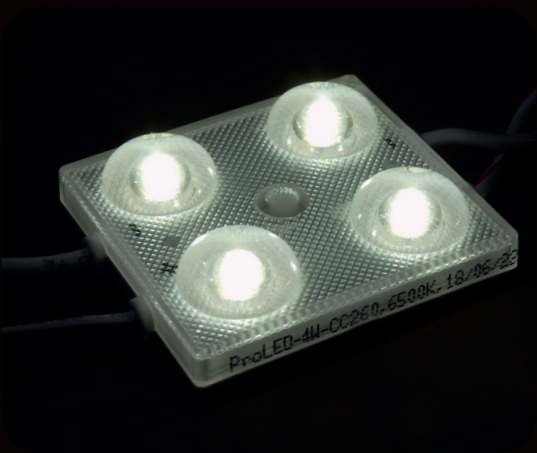

Supply	Model	PROLED-4X-CC260
	Rated voltage	12 V DC
	Power per module	1.6 W
	Current per 1 module	133 mA
Diodes	Chain power consumption	32 W
	Chain length	20 pcs / 5.2 m
	Color temperature	WW - Warm White (3000K) NW - Neutral White (4000K) W - White (7000K) CW - Cold White (10000K)
	Luminous flux (module)	210 lm
	Flux density	131 lm/W
	Lens	175°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	216 mm
	Center - center length	260 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +60°C
Dimension	Height, width, length	11.38 x 38.03 x 44.4 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 800 pcs



TEXAS-2W

for lightboxes 5 - 15 cm depth

Features

- IP65 waterproof
- Cuttable each one piece
- Injection mold technology
- 4 years warranty

Application

- 3D channel letters
- Lightboxes with 5 - 15 cm depth
- POS systems

WHITE
6500K

standard
CRI>80



IP65





4
years
warranty



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	23	34	45	68	94	113	141	188	225	281	375	563

24

Supply	Model	TEXAS-2W
	Rated voltage	12 V DC
	Power per module	0.48 W
	Current per 1 module	40 mA
	Chain power consumption	9.6 W
Diodes	Chain length	20 pcs / 2.5 m
	Color temperature	White (6500K)
	Luminous flux	42 lm
	Flux density	88 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	90 mm
	Center - center length	125 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP65
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	6.6 x 12.4 x 38.4 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 3000 pcs

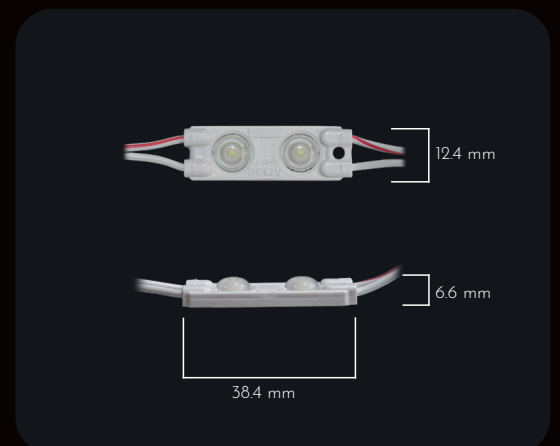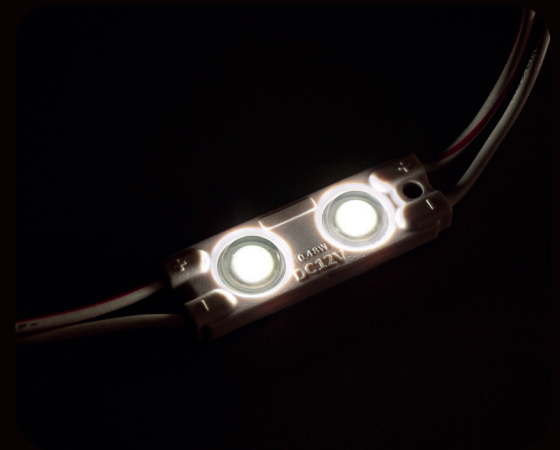

TEXAS-3X

for lightboxes 5 - 20 cm depth
X - color of light: R, G, or B

Features


- IP67 waterproof
- Cuttable each one piece
- Injection mold technology
- 4 years warranty

Application

- 3D channel letters
- Lightboxes with 5 - 20 cm depth
- Backlighting of furniture
- POS systems



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

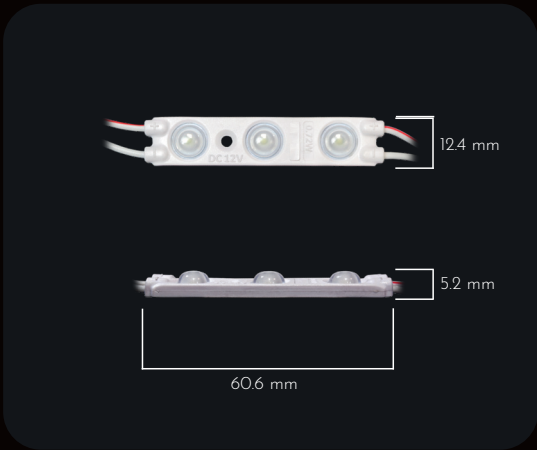

Supply	Model	TEXAS-3R / -3G / -3B
	Rated voltage	12 V DC
	Power per module	0.72 W
	Current per 1 module	60 mA
	Chain power consumption	14.4 W
Diodes	Chain length	20 pcs / 2.9 m
	Color temperature	R - Red (620 - 625 nm) G - Green (518 - 525 nm) B - Blue (458 - 470 nm)
	Luminous flux	R - Red - 20 lm G - Green - 48 lm B - Blue - 10 lm
	Flux density	95 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	70 mm
	Center - center length	130 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	5.2 x 12.4 x 60.6 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 2600 pcs



TEXAS-3X

for lightboxes 5 - 20 cm depth

X - color of light: W or CW

Features

- IP67 waterproof, injection molded
- Cuttable each one piece
- 4 years warranty

Application


- 3D chanel letters, signage
- Lightboxes with 5 - 20 cm depth
- Backlighting of furniture
- POS systems



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

26

Supply	Model	TEXAS-3W / -3CW
	Rated voltage	12 V DC
	Power per module	0.72 W
	Current per 1 module	60 mA
	Chain power consumption	14.4 W
Diodes	Chain length	20 pcs / 2.9 m
	Color temperature	W - White (6500K) CW - Cold White (9500K)
	Luminous flux	W - 66 lm CW - 71 lm
	Flux density	W - 92 lm/W CW - 99 lm/W
	Lens	160°
	Lifetime	L70B40 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	70 mm
	Center - center length	130 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -40°C ... +50°C
Dimension	Height, width, length	5.2 x 12.4 x 60.6 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 2600 pcs

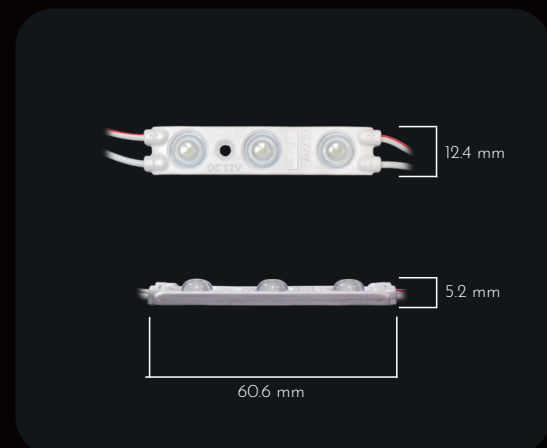

ALASKA-1W

for double sided lightboxes 12 - 18 cm depth

Features



- IP66 waterproof
- Cuttable each one piece
- Injection mold technology
- 4 years warranty

Application

- 3D channel letters
- Lightboxes with 12 - 18 cm depth
- POS systems



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	9	14	18	27	38	45	56	75	90	113	150	225

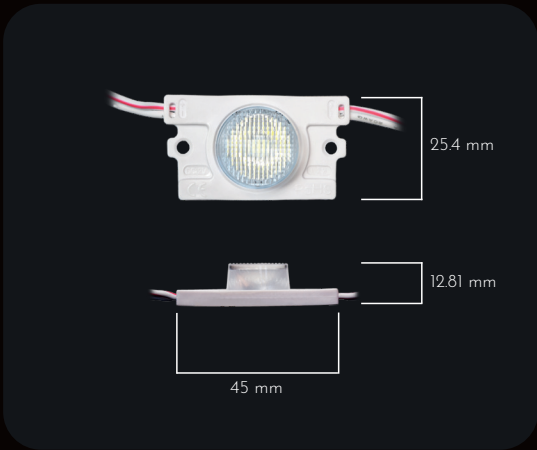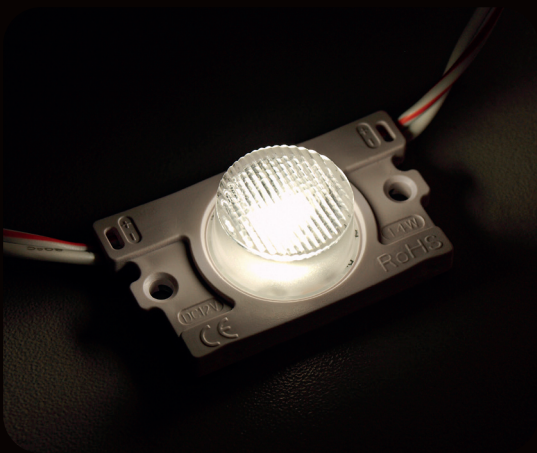

Supply	Model	ALASKA-1W
	Rated voltage	12 V DC
	Power per module	1.4 W
	Current per 1 module	116 mA
	Chain power consumption	28W
Diodes	Chain length	20 pcs / 4 m
	Color temperature	White (6500K)
	Luminous flux	125 lm
	Flux density	89 lm/W
	Lens	18 x 50°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	135 mm
	Center - center length	180 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP66
	Temperature	Working: -25°C ... +50°C
Dimension	Height, width, length	12.81 x 25.4 x 45 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 1200 pcs



NEBRASKA-1W

for double sided lightboxes 12 - 30 cm depth

Features

- IP66 waterproof, injection molded
- Cuttable each one piece
- 4 years warranty

Application


- 3D chanel letters, signage
- Lightboxes with 12 - 30 cm depth
- POS systems



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	5	7	9	14	19	23	28	38	45	56	75	113

28

Supply	Model	NEBRASKA-1W
	Rated voltage	12 V DC
	Power per module	2.3 W
	Current per 1 module	192 mA
	Chain power consumption	46 W
Diodes	Chain length	20 pcs / 4 m
	Color temperature	White (7000K)
	Luminous flux	165 lm
	Flux density	72 lm/W
	Lens	18 x 40°
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	150 mm
	Center - center length	188 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP66
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	14.69 x 29.5 x 37.5 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 1200 pcs

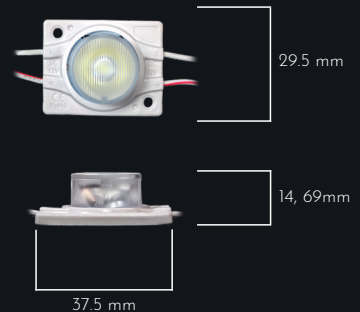

NEVADA-3X

for lightboxes 8 - 20 cm depth
X - color of light: W or CW

Features


- IP67 waterproof, injection molded
- Cuttable each one piece
- 4 years warranty

Application

- 3D chanel letters, signage
- Lightboxes with 8 - 20 cm depth
- POS systems



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	9	14	19	28	38	47	58	80	92	115	155	228

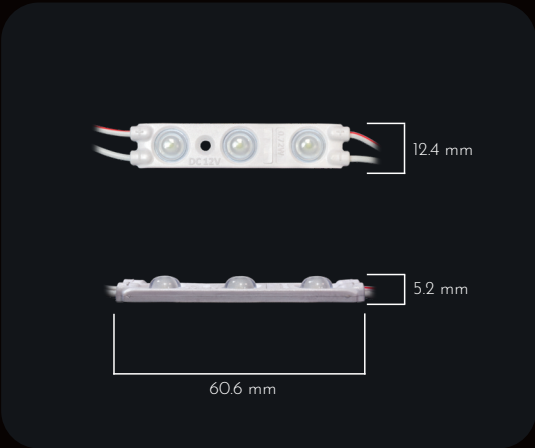

Supply	Model	NEVADA-3W / -3CW
	Rated voltage	12 V DC
	Power per module	1.2 W
	Current per 1 module	100 mA
	Chain power consumption	24 W
Diodes	Chain length	20 pcs / 2.9 m
	Color temperature	W - White (6500K) CW - Cold White (9500K)
	Luminous flux	W - 120 lm CW - 115 lm
	Flux density	W - 100 lm/W CW - 96 lm/W
	Lens	160°
	Lifetime	L70B50 > 50k hrs
	Connection	Soldering Screw terminal
Wires	Wire length	70 mm
	Center - center length	130 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	5.2 x 12.4 x 60.6 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	100 / 2600 pcs



MW-MLD-MINI-1W-LENS160

for lightboxes 5 - 8 cm depth

Features

- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application

- 3D channel letters



WHITE
6500K

standard
CRI>70



IP67



5
years
warranty

CE

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	36	54	72	108	150	180	225	300	360	450	600	900

30

Supply	Model	MW-MLD-MINI-1W-LENS160
	Rated voltage	12 V DC +/- 5%
	Power per module	0.36 W
	Current per 1 module	30 mA
Diodes	Chain power consumption	18 W
	Chain length	50 pcs / 2.35 m
	Color temperature	White (6500K)
	Luminous flux	33 lm
	Flux density	92 lm/W
	Lens	160°
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
	Screw terminal	-
Wires	Wire length	32 mm
	Center - center length	47 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	8 x 10.3 x 15.6 mm
Montage	Adhesive tape	Yes
	Mounting screw	-
	Hole size	-
Other	Case material	ABS
	Pcs in bag / box	400 / 5600 pcs



MW-MLD-5050-3RGBW


for lightboxes 8 - 25 cm depth

Features

- IP65 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application

- Letters of light
- Advertising boxes with a depth of 8 - 25 cm
- POS systems
- Backlighting of furniture

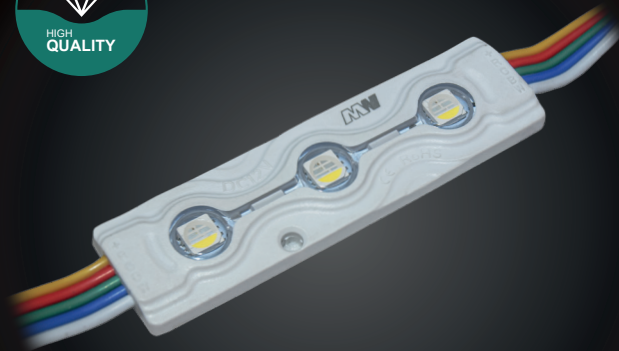

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	15	23	30	45	63	75	94	125	150	188	250	375

RED
620 - 630 nm

GREEN
520 - 530 nm

BLUE
460 - 470 nm

WHITE
6500K

CE



5 years warranty

120° lens

IP65

backlight

standard CRI>70

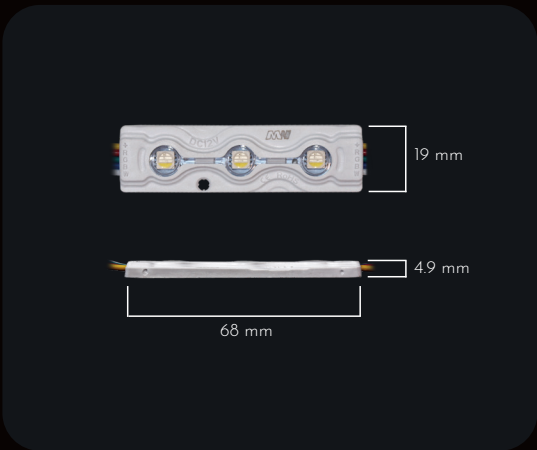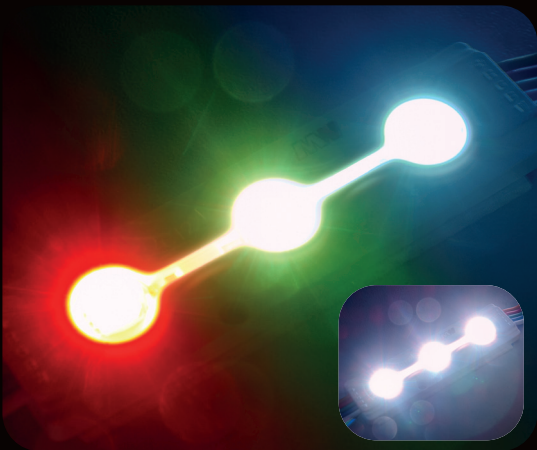

Supply	Model	MW-MLD-5050-3RGBW
	Rated voltage	12 V DC +/- 5%
	Power per module	0.96 W
	Current per 1 module	80 mA
	Chain power consumption	19.2 W
Diodes	Chain length	20 pcs / 5.8 m
	Color temperature	W - White (6500K) R - Red (620 - 630 nm) G - Green (520 - 530 nm) B - Blue (460 - 470 nm)
	Luminous flux	W - 20 lm R - 4 lm G - 9 lm B - 3.5 lm
	Flux density	21 lm/W
	Lens	120°
	Lifetime	L70B50 > 50k hrs
	Connection	Soldering Screw terminal
Wires	Wire length	107 mm
	Center - center length	175 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP65
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	4.9 x 19 x 68 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	120 / 1440 pcs



MW-MLD-CCT-2WW/W-LENS-24V

for lightboxes 5 - 15 cm depth

Features

- Adjustable color temp
- IP64 waterproof, injection molded
- Internal current stabilization (CC)
- 5 years warranty

Application

- 3D chanel letters, signage
- Ceiling lighting
- Advertising lightboxes with a dept 5 - 15 cm
- POS systems

Compatible LED controllers


- MW-CTR-CCT-6A-02-RX
- ML-FUT036
- ML-FUT036M



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	5	8	11	16	23	27	34	45	54	68	90	135

32

Supply	Model	MW-MLD-CCT-2WW/W-LENS-24V
	Rated voltage	24 V DC +/- 5%
	Power per module	0.96 W
	Current per 1 module	40 mA
	Chain power consumption	19.2 W
Diodes	Chain length	20 pcs / 5.2 m
	Color temperature	WW - Warm White (2700K) W - White (6500K) multi - white adjustable
	Luminous flux	78 lm max
	Flux density	81 lm/W
	Lens	165°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	105 mm
	Center - center length	160 mm
	Wires	Red (common +) White (white -) Black (warm white -)
Environment	IP protection	IP64
	Temperature	Working: -25°C ... +50°C
Dimension	Height, width, length	10.8 x 21.9 x 55 mm
Montage	Adhesive tape	Yes
	Mounting screw	-
	Hole size	-
Other	Case material	ABS
	Pcs in bag / box	120 / 960 pcs

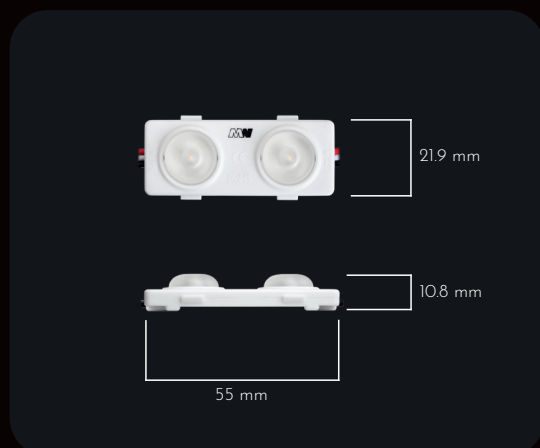

MINIOVAL-1X

for lightboxes 2.5 - 8 cm depth
X - color of light: W or WW

Features


- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Small Dimension
- 5 years warranty

Application

- For small and slim 3D signage letters
- Backlighting 2.5 - 8 cm



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	30	45	60	90	125	150	188	250	300	375	500	750

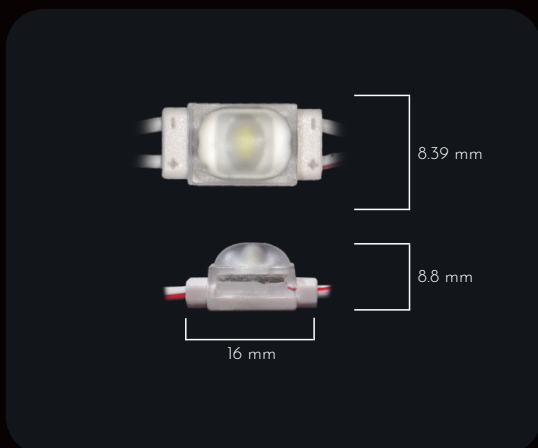

Supply	Model	MINIOVAL-1W / -1WW
	Rated voltage	12 V DC +/- 5%
	Power per module	0.36 W
	Current per 1 module	30 mA
	Chain power consumption	36 W
Diodes	Chain length	100 pcs / 4 m
	Color temperature	White (6500K) Warm White (3000K)
	Luminous flux	41 lm
	Flux density	114 lm/W
	Lens	170 x 130°
Connection	Lifetime	L70B50 > 50k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	34 mm
	Center - center length	50 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	8.8 x 8.39 x 16 mm
Montage	Adhesive tape	Yes
	Mounting screw	-
	Hole size	-
Other	Case material	ABS
	Pcs in bag / box	100 / 6000 pcs



BoxSide-OVAL-S-W

for one-side and two-side lighboxes min. 6 cm

Features

- IP67 waterproof, injection molded
- Constant current drive (CC)
- Innovative optic design 11 x 40 deg with arc lens
- Dark corners reducing
- 7 years warranty

Application

- General signage
- One-side and two-side lighboxes min. 6 cm

WHITE
6500K



7
years
warranty

IP67




standard
CRI>80

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	8	12	16	25	34	41	51	68	82	102	136	205

34

Supply	Model	BoxSide-OVAL-S-X
	Rated voltage	12 V DC +/- 5%
	Power per module	1.3 W
	Current per 1 module	108 mA
	Chain power consumption	52 W
Diodes	Chain length	40 pcs / 7.2 m
	Color temperature	White (6500K)
	Luminous flux	106 lm
	Flux density	82 lm/W
	Lens	11 x 40°
	Lifetime	L70B50 > 70k hrs
Connection	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	73 mm
	Center - center length	180 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	11.3 x 20 x 107 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	40 / 560 pcs

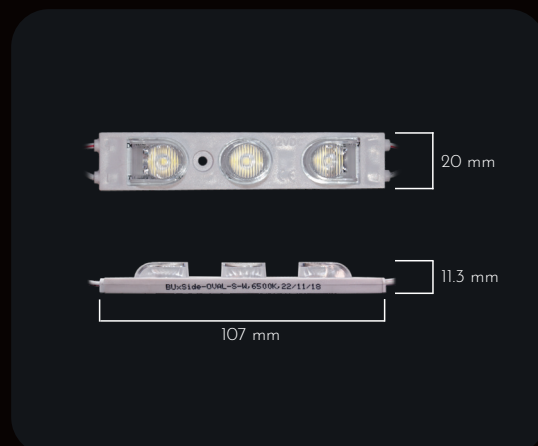

BoxSide-OVAL-M-W

for one-side and two-side lighboxes 2 - 4 m

Features


- IP68 waterproof, injection molded
- Constant current drive (CC)
- Innovative optic design 11 x 40 deg with arc lens
- Dark corners reducing
- 7 years warranty

Application


- General signage
- One-side and two-side lighboxes with length 2 - 4 m



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	4	5	7	11	15	18	23	30	36	45	60	90

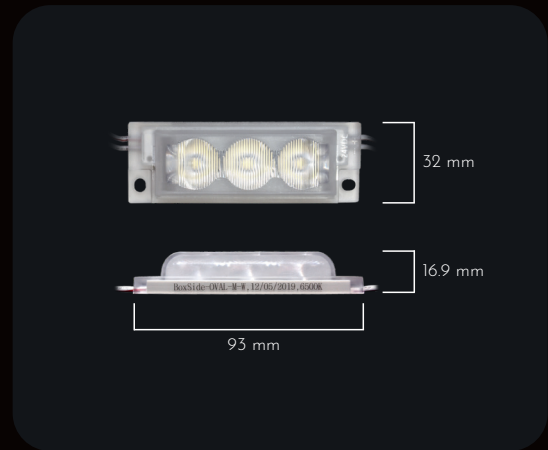

Supply	Model	BoxSide-OVAL-M-W
	Rated voltage	24 V DC +/- 5%
	Power per module	3.4 W
	Current per 1 module	142 mA
	Chain power consumption	136 W
Diodes	Chain length	40 pcs / 12 m
	Color temperature	White (6500K)
	Luminous flux	250 lm
	Flux density	74 lm/W
	Lens	11 x 40°
Connection	Lifetime	L70B50 > 70k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	207 mm
	Center - center length	300 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP68
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	16.9 x 32 x 93 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	40 / 320 pcs

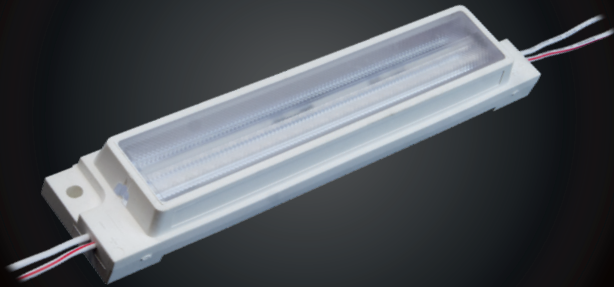

BoxSide-OVAL-L-W

for one-side and two-side lighboxes min. 1.5 - 4 m

Features

- IP67 waterproof, injection molded
- Constant current drive (CC)
- Innovative optic design 11 x 77 deg lens
- Highest lighting flux
- 7 years warranty

Application

- General signage
- One-side and two-side lighboxes min 1.5 - 4 m

WHITE
6500K

standard
CRI>80



IP67

7
years
warranty

CE

Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	2	2	3	5	6	8	9	13	15	19	25	38

36

Supply	Model	BoxSide-OVAL-L-W
	Rated voltage	24 V DC +/- 5%
	Power per module	7.4 W
	Current per 1 module	308 mA
	Chain power consumption	118.4 W
Diodes	Chain length	16 pcs / 5.6 m
	Color temperature	White (6500K)
	Luminous flux	550 lm
	Flux density	74 lm/W
	Lens	11 x 75°
Connection	Lifetime	L70B50 > 70k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	175 mm
	Center - center length	350 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	21.4 x 36 x 175 mm
Montage	Adhesive tape	Yes
	Mounting screw	Yes
	Hole size	M3
Other	Case material	ABS
	Pcs in bag / box	16 / 112 pcs



MW-MLD-FLAT-1X-LENS170

for lightboxes. 3 - 10 cm depth
X - color of light: W or NW

Features


- IP67 waterproof, injection molded
- Internal current stabilization (CC)
- Built-in heat sink plate
- 5 years warranty

Application


- Letters of light
- Advertising lightboxes 3 - 10 cm depth
- POS systems



Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	11	17	23	34	47	56	70	94	113	141	188	281

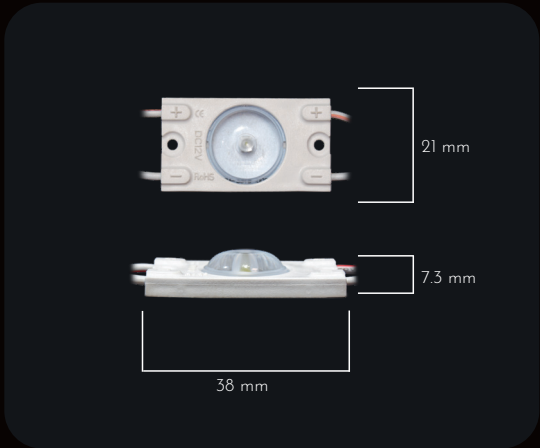

Supply	Model	MW-MLD-2835-1X-LENS170
	Rated voltage	12 V DC +/- 5%
	Power per module	0.98 W
	Current per 1 module	82 mA
	Chain power consumption	29.4 W
Diodes	Chain length	30 pcs / 5.2 m
	Color temperature	NW - Neutral White (4000K) W - White (6500K)
	Luminous flux	80 lm
	Flux density	82 lm/W
	Lens	170°
Connection	Lifetime	L70B40 > 50k hrs
	Soldering	Yes
	Screw terminal	Yes
Wires	Wire length	112 mm
	Center - center length	150 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP67
	Temperature	Working: -25°C ... +55°C
Dimension	Height, width, length	7.3 x 21 x 38 mm
Montage	Adhesive tape	Yes
	Mounting screw	-
	Hole size	-
Other	Case material	ABS
	Pcs in bag / box	120 / 1920 pcs

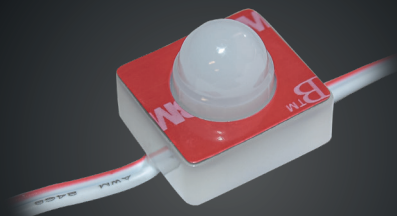

MW-MLD-PIXEL-1X

for channel letters

X - color of light: W, R or G

Features

- IP68 waterproof, injection molded
- Constant current drive (CC)
- Internal current stabilization (CC)
- Wide Color palette
- UV resistant
- 5 years warranty

Application


- Chanel letters
- Pharmacy crosses




Power supply	12 W	18 W	24 W	36 W	50 W	60 W	75 W	100 W	120 W	150 W	200 W	300 W
Number of modules	30	45	60	90	125	150	188	250	300	375	500	750

38

Supply	Model	MW-MLD-PIXEL-1R / -1G / 1W
	Rated voltage	12 V DC +/- 5%
	Power per module	0.36 W
	Current per 1 module	30 mA
Diodes	Chain power consumption	18 W
	Chain length	50 pcs / 4.5 m
	Color temperature	R - Red (620 - 630 nm) G - Green (520 - 530 nm) W - White (6500K)
	Luminous flux	R - 21 lm G - 4.5 lm W - 29 lm
	Flux density	R - 58 lm/W G - 12.5 lm/W W - 81 lm/W
	Lens	145°
	Lifetime	L70B50 > 50k hrs
Connection	Soldering	-
	Screw terminal	-
Wires	Wire length	65 mm
	Center - center length	86 mm
	Wires	White - red (+), White (-)
Environment	IP protection	IP68
	Temperature	Working: -25°C ... 55°C
Dimension	Height, width, length	18 x 20 x 15.7 mm
Montage	Adhesive tape	-
	Mounting screw	-
	Hole size	-
Other	Case material	ABS, PC cover
	Pcs in bag / box	100 / 1000 pcs

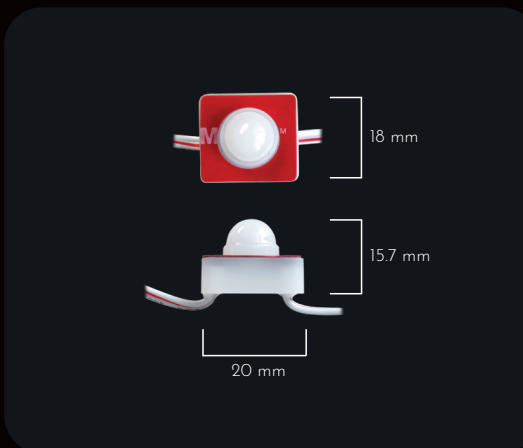

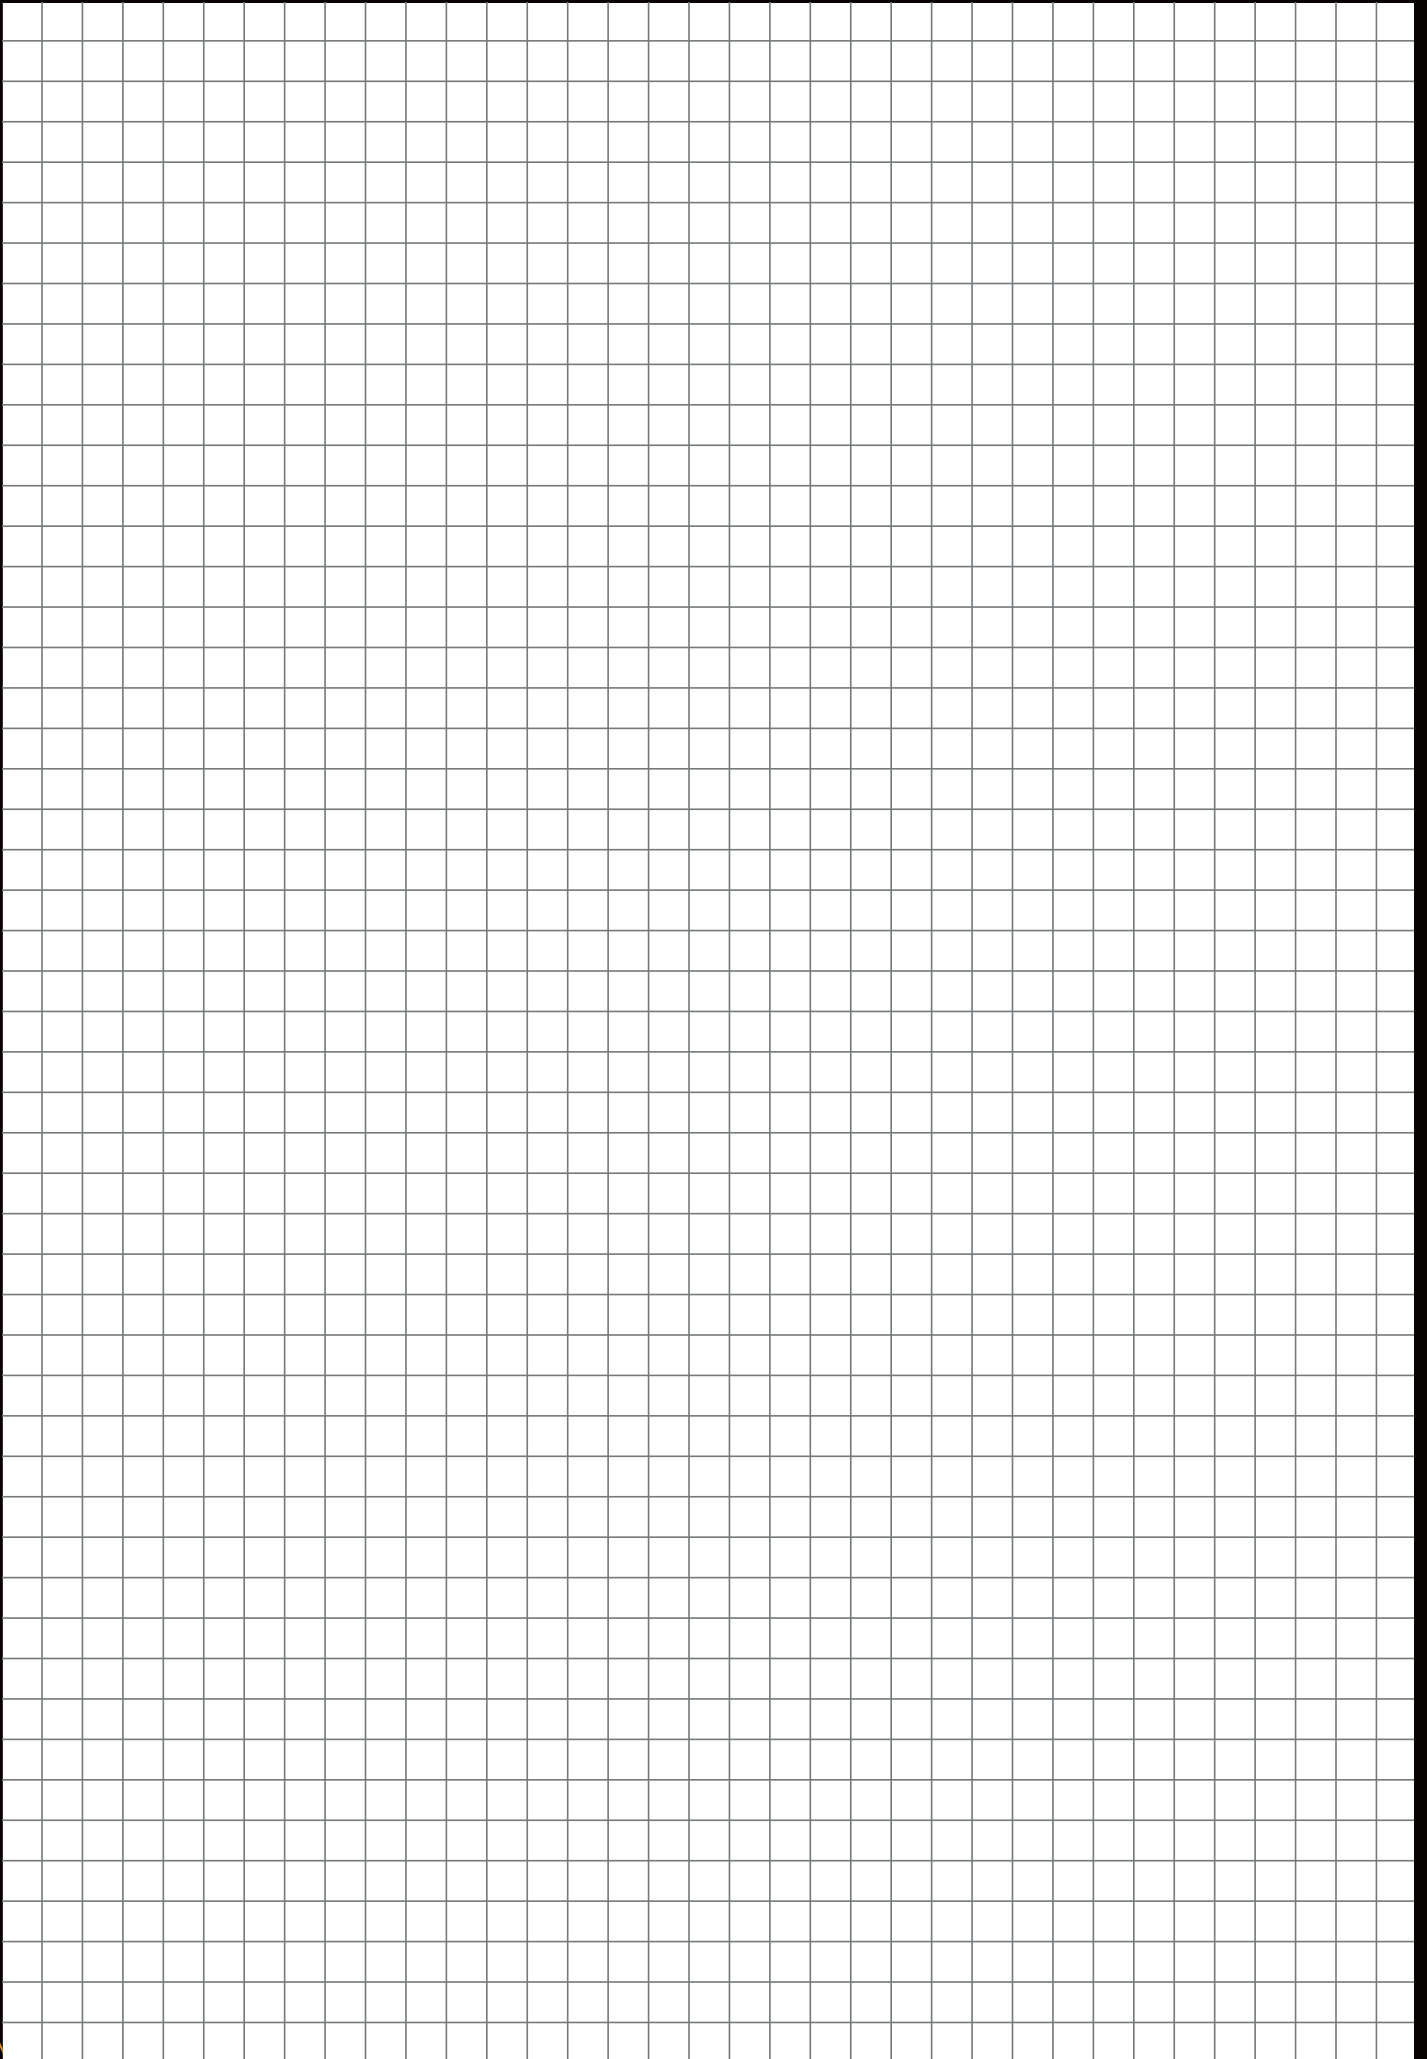



DISTRIBUTOR: