


FEATURES

- 10A cube relay
- Plastic material applied in high temperature and better chemical solution.
- Sealed type for washing procedure
- Using at home appliances, office machines, audio equipment, coffee pot, control units, etc.
- UL File No.: E126157, CUL File No.: E126157, TUV File No.: R09754097

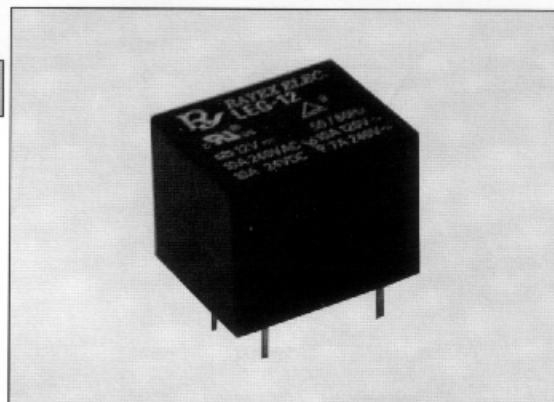

ORDERING INFORMATION

LEG — 12
1 2

1. Type
2. Coil Nominal Voltage



CONTACT RATING

UL	Resistive (Cos.θ = 1)	AC 240V / DC 24V	10A
	Inductive (Cos.θ = 0.4)	AC 240V	5A
TUV	Resistive (Cos.θ = 1)	AC 120V	10A
		AC 240V / DC 24V	7A
	Inductive (Cos.θ = 0.4)	AC 240V	3A


COIL DATA(0.36W, at 25°C)

Coil Nominal Voltage (VDC)	Resistance Tol. ± 10% (Ohms)	Nominal Current (mA)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
3	25	120	2.1	0.3
5	70	72	3.5	0.5
6	100	60	4.2	0.6
9	225	40	6.3	0.9
12	400	30	8.4	1.2
24	1,600	15	16.8	2.4
48	6,400	7.5	33.6	4.8


DIMENSIONS(mm)

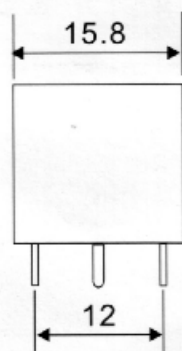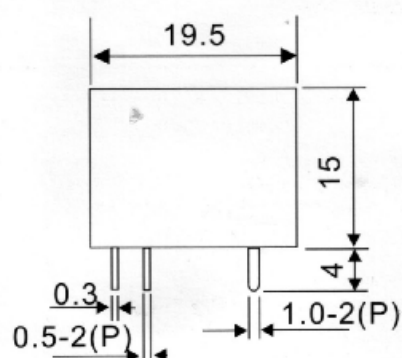

WIRING DIAGRAM
(BOTTOM VIEW)




P.C.B LAYOUT
(BOTTOM VIEW)

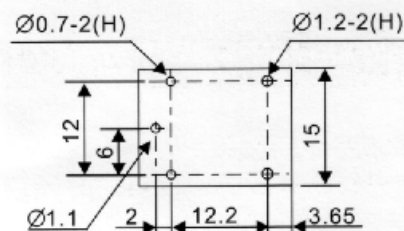


REFERENCIAL DATA


Life expectancy

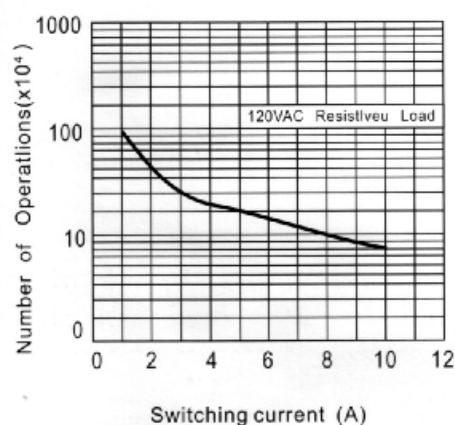

Operate time/Release time

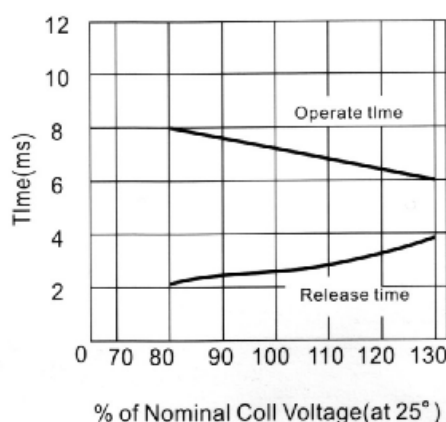

Coil temp.rise

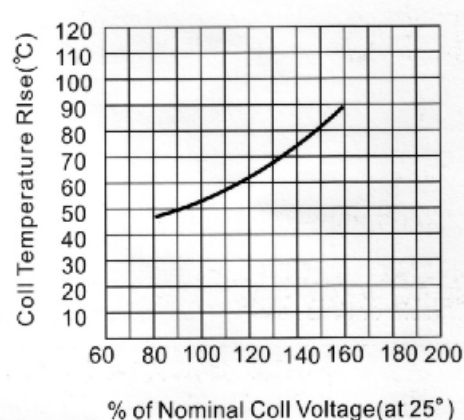

GENERAL DATA

Insulation Resistance	100 MΩ Min. (DC 500V)
Dielectric Strength	750 VAC, 50/60Hz between contact. 1,500 VAC, 50/60Hz between all elements.
Contact Material	Silver- Cadmium Oxide as standard. Ag Alloy
Contact Resistance	100 milliohms max. (initial value)
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	8 ms max.
Release Time	8 ms max.
Temperature Range	- 25°C ~ + 60°C
Expected Life	With operation rate 30/min. Mechanical - 10,000,000 operations min. Electrical - 100,000 operations min. at rated load.
Weight	9 grams