

Maximum length of the heating section, m


(or the total length of a section of the same brand connected in parallel)
depending on the type of circuit breaker.

SWITCH-ON TEMPERATURE	~220V			
	16A	20A	30A	40A
10°C	75	85	105	115
0°C	63	77	95	107
-20°C	56	65	75	90
-40°C	43	55	65	75

Temperature characteristics

Rated heat dissipation under rated conditions for UHC-40 cable with operating voltage ~220V.

Linear power, W/m

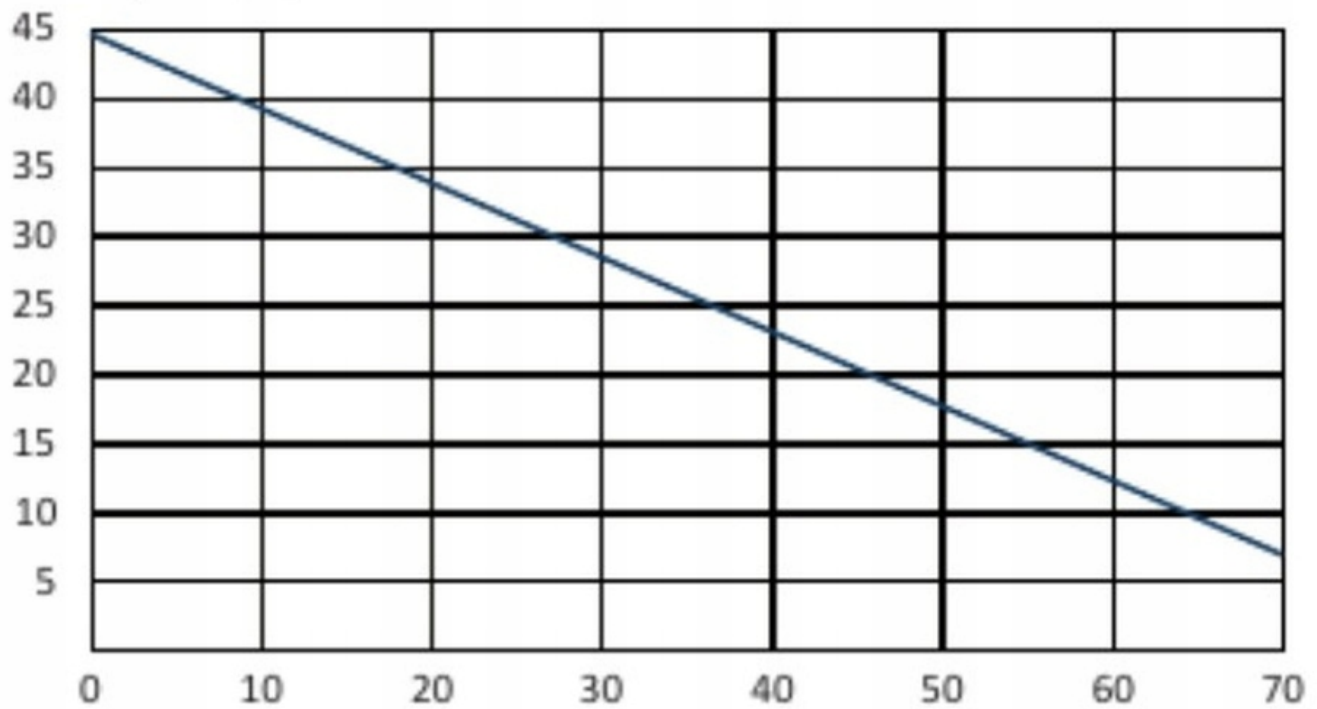

Pipe temperature, °C