

# HONDA ACCORD INSTRUCTION

(for LX/Sport/EX model)


Please preview this whole instruction first then start to act.



As for installation of big piece,remove your original sockets to install on our taillight wires for LX/Sport/EX model.  
The bulbs on original sockets may not be needed on our taillight(big piece),so you can remove the bulbs.



1.this is your original left taillight piece, remove the turning plug.

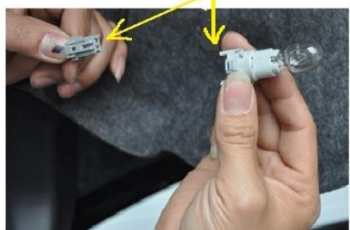

3.connect the plug and the wire



2.this is "black&blue" wire,connect it with left picture's turning plug.



4. install this wire on our LEFT side taillight

1.As for installation of small piece, remove your original sockets to install on our wires for LX/Sport/EX model.you may need original bulbs on our taillight(small piece).

2.As for turning plug(small piece) on LEFT side of taillight,you need use the "black&blue" wire to connect with it.(see 4 steps on left pic)

Pls take care of all sockets and wires,don't use too much power pull them ponderously.