


LED DOWNLIGHT

Product&Family Code: 016 078 1005


NORA PRO/S-5

Technical Data

Voltage (V)	170-265V
Product Wattage (W)	5
Equivalence with incandescent lamp	40
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	3000K - 4500K 6000K
Materials	Plastic
Protection Class	II
Dimmable	No
EEI	
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	450
Luminous Efficacy (lm/W)	90
Rated Life (hrs) ⌚	20.000
IP Rating	20
Power Factor	>0.5
Beam Angle	52°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000


WHITE

BLACK



CCT Adjustable

Technical Drawing

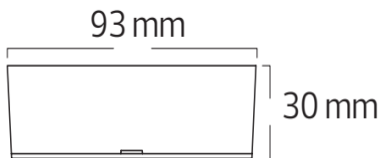

Applications

- Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

