



# LED BULB

Product&Family Code: 001 073 0010


**COMBO-10**



Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	10
Equivalence with incandescent lamp	68
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3CCT (3000K-4000K-6400K)
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	940
Luminous Efficacy (lm/W)	94
Rated Life (hrs) Ⓣ	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	160 °
Starting Time	<0.5
Number of ON-OFF cycling	x12,500



Technical Drawing

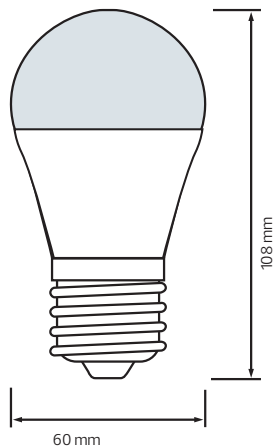

## Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.

## Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

