


HQS-14.4W-60LED-RGB-12V

Professional Led Strip, 14.4 W/m

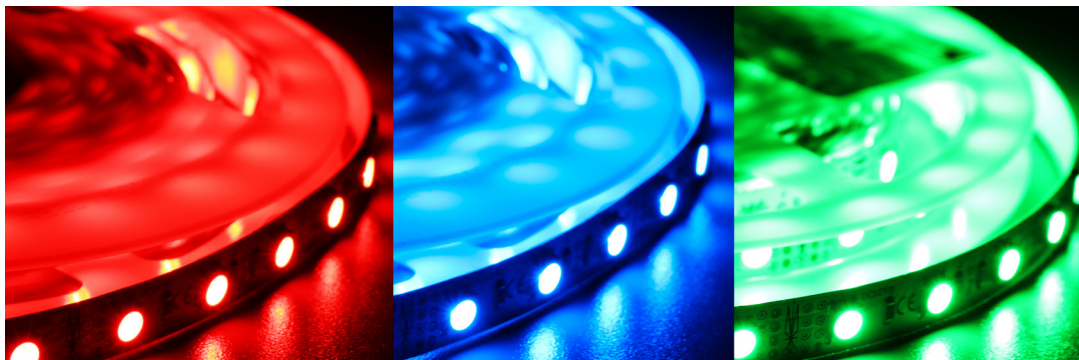

IP33

120°
lens


620 - 630 nm
RED

520 - 530 nm
GREEN


460 - 470 nm
BLUE

TECHNICAL DETAILS

SUPPLY VOLTAGE	12 V $\pm$ 0.5 VDC
POWER	14.4 W/m
CURRENT	1.2 A/m
POWER PER REEL (5M)	72 W
WAVELENGTH RANGE	R: 620 - 630 nm, G: 520 - 530 nm, B: 460 - 470 nm
BEAM ANGLE	120°
LUMINOUS FLUX PER METER	R: 195 lm, G: 435 lm, B: 103 lm
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP33
WORKING TEMPERATURE	-25°C ~ 50°C
STORAGE TEMPERATURE	-25°C ~ 60°C
LED QTY (PER METER)	60 LEDs/m
WIDTH PCB	10 mm
CUT SECTION	50 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm ²) stranded wire, length = 140 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5000 x 10 x 1.8 mm
PACKING	5 m /roll (bag); 60 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm

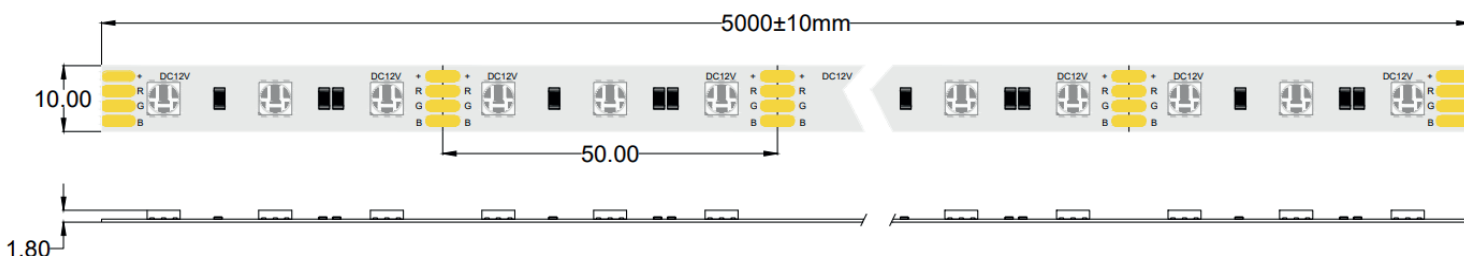


CONNECTORS PCB Width 10 mm

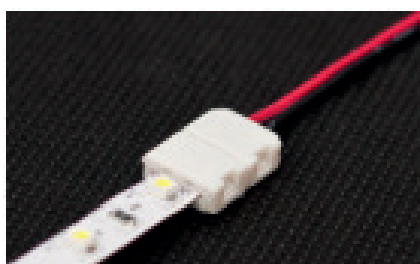

CLICK-10A



CLICK-10B

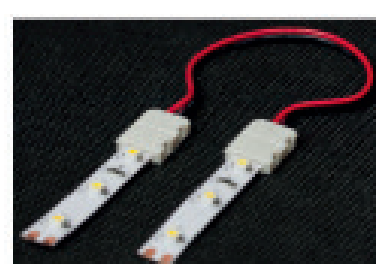

CLICK-10C