

# BPOWER<sup>®</sup>

## Bpower SUPREME GTX4L

GEL 12V - FACTORY ACTIVATED

### Parameters

|          |     |
|----------|-----|
| Voltage  | 12V |
| Capacity | 3Ah |
| Current  | 60A |

### Dimensions

|        |       |
|--------|-------|
| Length | 113mm |
| Width  | 70mm  |
| Height | 85mm  |

### Weight

|                  |        |
|------------------|--------|
| With electrolyte | 1,45kg |
|------------------|--------|

### Case Features


|                    |        |
|--------------------|--------|
| Cell configuration | Right+ |
| Cell layout        | 5      |

### Technology

|                              |       |
|------------------------------|-------|
| Technology                   | CA/CA |
| Separator                    | AGM   |
| Recommended charging current | 0,3A  |
| Mounting Angle               | 360°  |



### Type of terminal

### Cell configuration

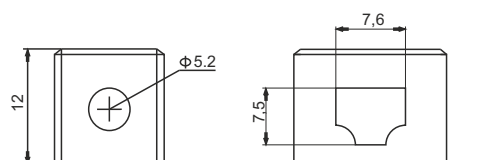

Front View

Side View

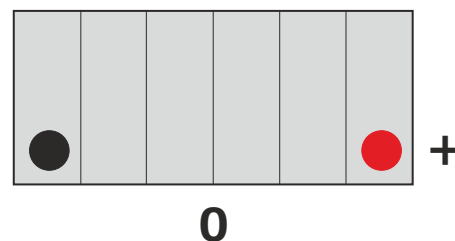

Top View

The date of issue of catalog card: 03/2018