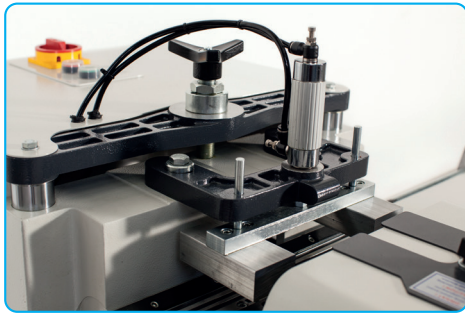




Features

Used for cutting window strips of plastic profiles at an angle of 45°.


- Pneumatic cutting
- Automatic returning to process starting point
- Conveyor system with measuring equipment
- Cutting and conveying speed adjustment






Standard Equipments

- Ø 100 mm saw blade (2 pcs)
- Ø 200 mm saw blade (2 pcs)
- Strip mold
- Conveyor

Optional Equipments

- Special mold
- Single-phase system



 (x2)				 (x2)											
HP kW	n	3~ Hz	I (400 V)	Ø D1	Ø D2	Ø d	S1	S2	n	CA	x max	y max	Air Pressure	Air Consumption	l x w x h (mm)
3 2,2	3000 r.p.m	50 60	4,6 A	200 mm	100 mm	32-22 mm	2 mm	4 mm	3000 r.p.m	45°	50 mm	30 mm	6 - 8 bar	20 L / min	1020 x 2515 x 1110 116 kg

CA: Cutting Angles