

KEY FEATURES


- 8" bass loudspeaker and 1" exit compression driver combination
- High power handling: 170 w AES (L.F. unit) and 40 w AES (H.F. unit)
- Extended and linear frequency response (65-20000 Hz)
- High sensitivity: 95 dB (L.F. unit) and 105 dB (H.F. unit)
- Low weight (neodymium compression driver)
- Bass loudspeaker designed for compact bass-reflex cabinets



GENERAL DESCRIPTION


This 8" coaxial loudspeaker has been designed in order to achieve an excellent compromise between power handling, efficiency and weight. Its low frequency unit features a 2" (51.7 mm) aluminium voice coil which handles 170 w AES, while the high frequency unit features a 1.75" (44.4 mm) edgewound aluminium ribbon voice coil which yields a 40 w AES power handling. The combination of these two drivers give as a result an extended and linear frequency response with low distortion and high efficiency. Moreover, this dual loudspeaker has a relatively low weight (3.7 kg.) that makes easier to fit it with a compact bass-reflex enclosure.

FREQUENCY RESPONSE AND DISTORTION CURVES

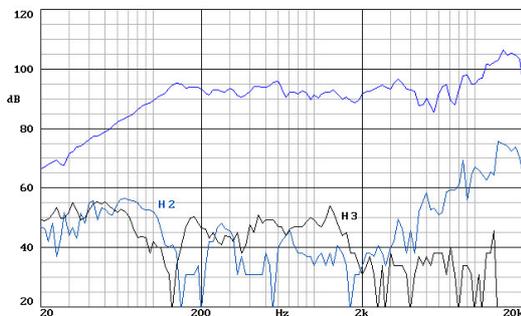


Note: on axis filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1w @ 1m.

FREQUENCY RESPONSE OUT OF AXIS

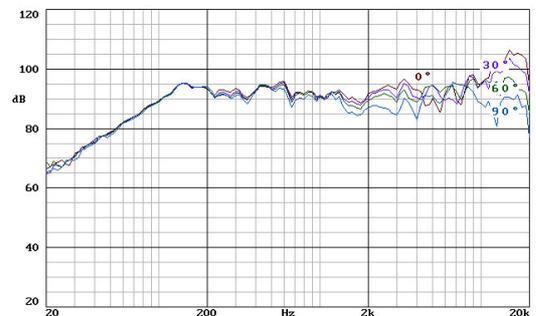


PREDICTED LOW FREQUENCY RESPONSE

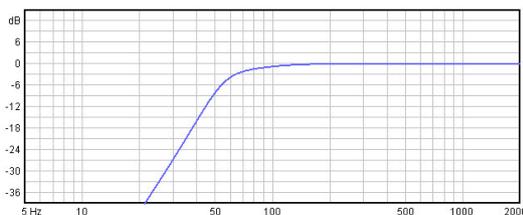

Note: bass-reflex cabinet, $V_b=20$ l, $f_b=62$ Hz

FREQUENCY RESPONSE OF LF & HF UNITS

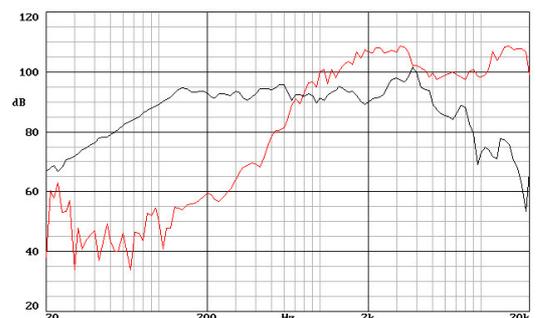

Note: on axis frequency response of low and high frequency units, 1w @ 1m.

TECHNICAL SPECIFICATIONS

L.F. UNIT

Nominal diameter	200 mm. 8 in.
Rated impedance	8 ohms.
Minimum impedance	7 ohms.
Power capacity*	170 w AES
Program Power	340 w
Sensitivity	95 dB 2.83v @ 1m @ 2π
Frequency range	65-7000 Hz
Recom. enclosure vol.	10 / 30 0.35 / 1.06 ft. ³
Voice coil diameter	51.7 mm. 2 in.
Magnetic assembly weight	3.4 kg. 7.48 lb.
BL factor	11.3 N/A
Moving mass	0.018 kg.
Voice coil length	17 mm.
Air gap height	7 mm.
X damage	24 mm.

H.F. UNIT

Rated impedance	16 ohms.
Minimum impedance	10.9 ohms. @ 4.5 kHz
Power capacity	40 w AES above 1.5 kHz
Frequency range	0.7 - 20 kHz
Sensitivity 1w @ 1m	105 dB
Voice coil diameter	44.4 mm. 1.75 in.
Flux density	1.8 T
BL factor	10.5 N/A
Dispersion	90° conical


THIELE-SMALL PARAMETERS

Resonant frequency, fs	75 Hz
D.C. Voice coil resistance, Re	6.3 ohms.
Mechanical Quality Factor, Qms	7.4
Electrical Quality Factor, Qes	0.42
Total Quality Factor, Qts	0.40
Equivalent Air Volume to Cms, Vas	17 l
Mechanical Compliance, Cms	250 μm / N
Mechanical Resistance, Rms	1.1 kg / s
Efficiency, ηo (%)	1.7
Effective Surface Area, Sd (m ²)	0.0220 m ²
Maximum Displacement, Xmax	5 mm
Displacement Volume, Vd	111 cm ³
Voice Coil Inductance, Le @ 1 kHz	1.2 mH

Notes:

*The power capacity is determined according to AES2-1984 (r2003) standard.
Program power is defined as the transducer's ability to handle normal music program material.

DIMENSION DRAWINGS

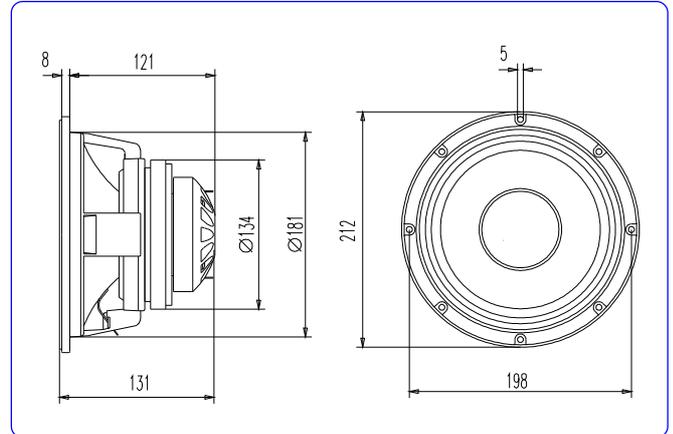

MATERIALS

L.F. UNIT

- **Basket:** Die cast aluminium
- **Cone:** Paper
- **Surround:** Plasticised cloth
- **Voice coil:** Aluminium
- **Magnet:** Ferrite

H.F. UNIT

- **Diaphragm:** Polyester
- **Voice coil:** Edgewound aluminium ribbon
- **Voice coil former:** Kapton
- **Magnet:** Neodymium

MOUNTING INFORMATION

Overall diameter	212 mm.	8.35 in.
Bolt circle diameter	198 mm.	7.79 in.
Baffle cutout diameter:		
- Front mount	181 mm.	7.12 in.
- Rear mount	181 mm.	7.12 in.
Depth	131 mm.	5.16 in.
Volume displaced by driver	1.5 l	0.056 ft. ³
Net weight	3.7 kg.	8.14 lb.
Shipping weight	4.2 kg.	9.24 lb.

**T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).