



MADE IN ITALY since 1972

TURBO 5000 PERFORMER 5000

FEATURES

- # CB & 10 m Mobile antennas
- # Very High power handling
- # Tunable from 27 to 30 MHz
- # DC-Ground protection
- # 17/7 PH tapered stainless steel whip
- # Whip detachable for car-wash
- # PL version (suffix PL) with a special base connection suitable for magnetic mount installation (no cable supplied)



TECHNICAL DATA

Type: base loaded
 Impedance: 50 Ω
 Frequency range: 27 ... 30 MHz
 Polarization: linear vertical
 SWR @ res. freq.: ≤ 1.2
 Max. power: 1500 Watts (CW) continuous
 5000 Watts (CW) short time
 Bandwidth @ SWR ≤ 2: ≥ 2300 kHz (200 channel)
 Mounting:
 TURBO-5000, PERFORMER-5000 hole Ø 12.5 mm, Ø 1/2 in
 TURBO-5000 PL, PERFORMER-5000 PL UHF-male (PL 259)
 Cable length / Type:
 PL version not supplied
 Standard: max power up to 600 Watts 4m, 13ft / RG 58
 Height (approx.): 1965 mm, 6.4 ft
 Weight (approx.): 650 gr, 1.4 lb

P/N 2218505.50	PERFORMER-5000 (standard cable)
P/N 2218505.51	PERFORMER-5000 PL
P/N 2202205.40	TURBO-5000 (standard cable)
P/N 2202205.43	TURBO-5000 PL



OPTIONAL HI-POWER CABLE
 max power up to 2000 Watts
 4m, 13 ft / RG 303 PTFE cable
 P/N 2509605.00

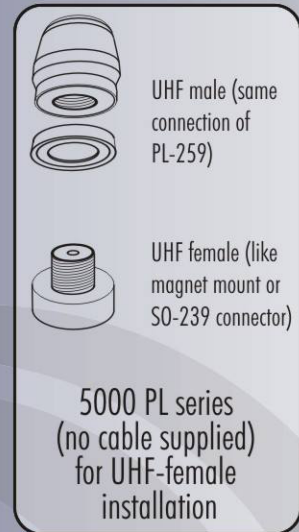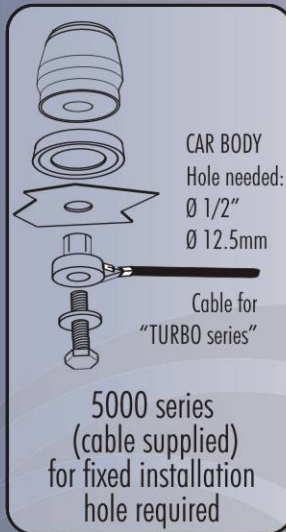

TURBO 5000

90° ADJUSTABLE
 no tools required

CHROME PLATED
 ZAMAK HEAVY JOINT &
 BRASS LOCKING HANDLE
 for 180° Tilting



PERFORMER 5000