



APPEARANCE

DRAWING

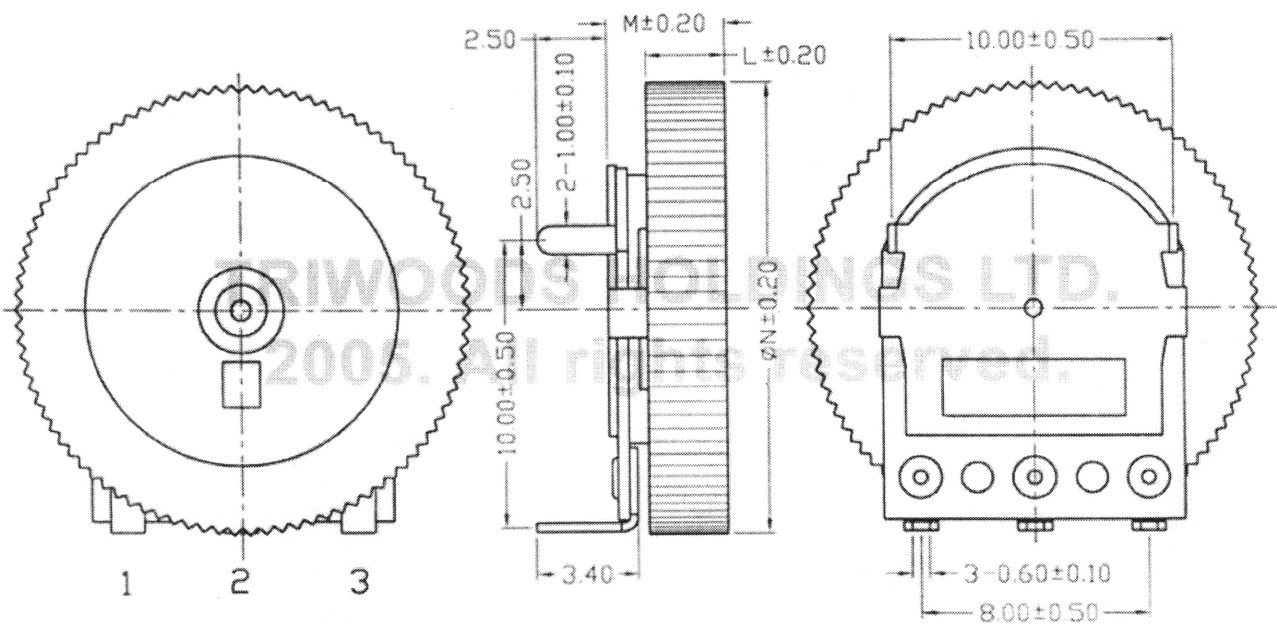

$\Phi 14/L0.8$			$\Phi 16/L2.0$		
$\Phi=14.20$	$L=0.70$	$M=2.40$	$\Phi=16.00$	$L=1.80$	$M=3.40$
$\Phi 14/L1.0$			$\Phi 16/L3.0$		
$\Phi=14.20$	$L=1.00$	$M=2.40$	$\Phi=16.00$	$L=2.70$	$M=4.20$
$\Phi 14/L1.0$			$\Phi 20/L2.0$		
$\Phi=14.00$	$L=1.00$	$M=2.20$	$\Phi=20.00$	$L=2.00$	$M=4.20$
$\Phi 16/L1.0$			$\Phi 20/L2.2$		
$\Phi=16.00$	$L=1.00$	$M=2.60$	$\Phi=20.00$	$L=2.20$	$M=4.20$

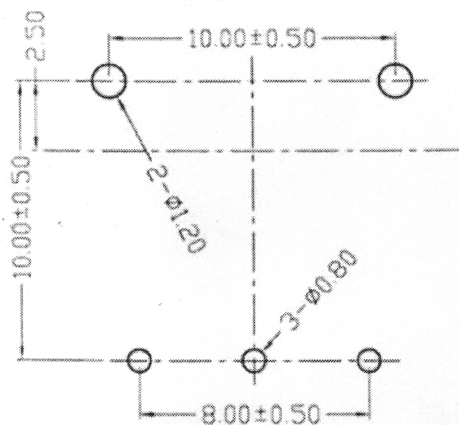

RECOMMEND P.C.B LAYOUT



CIRCUIT

未注角度	$\pm 10^\circ$
未注公差	0-10mm ± 0.3 mm
未注公差	10-60mm ± 0.5 mm

1010N H-Lx-(ΦN)

DRAWING NO	REV	SHEET/OF
TEC-WI-E.WX-163	B3	