


PORTALAMPADE DOPPIO PROTETTO PER LAMPADE FLUORESCENTI LINEARI T8
TWIN PROTECTED LAMPHOLDER FOR T8 FLUORESCENT LINEAR LAMPS

Technical data

- Attacco lampada - <i>Lamp Cap</i>	GI3
- Corrente e tensione nominale - <i>Rated current and voltage</i>	2A-500V
- Temperatura massima di funzionamento (IEC) - <i>Maximum operating temperature (IEC)</i>	T140 Tm110
- Grado di protezione - <i>Protection index</i>	IP66/IP67
- Categoria di sovratensione - <i>Impulse withstand category</i>	II

Characteristics

- Corpo in polycarbonato bianco e PBT bianco
- *White polycarbonate and white PBT body*
- Contatti in lega di rame
- *Copper alloy contacts*
- Guarnizioni in neoprene/silicone
- *Neoprene/silicone gaskets*

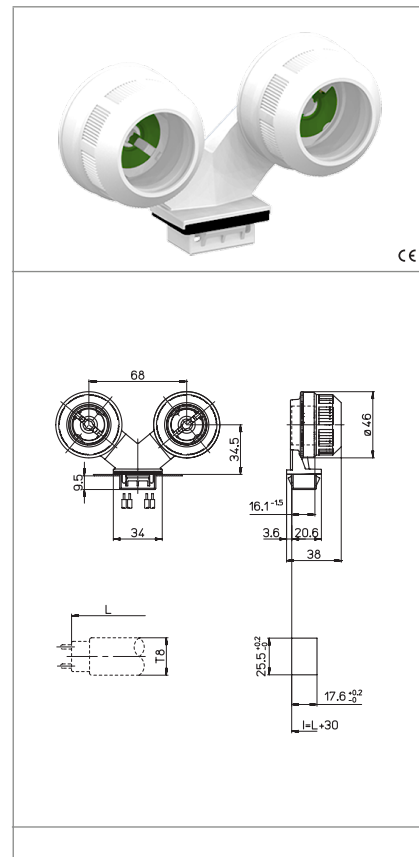

snap-in fixing



fixing metal plate thickness



altezza centro lampada (da sopra la lamiera)
lamp centre height (from the top of the metal plate)



PBT green rotor with position of...



push-wire terminals with 1 hole



rigid conductor section



rigid wires stripping



IP66/IP67 protected

Quality marks



660W-600V HT120 (UL496)



European directives

Conforme "RoHS"
"RoHS" compliant
Non soggetto alla "RAEE"
Not subject to "WEEE"

Weights and packaging

[illegible]

Notes