1, check whether the accessories are complete, lack of accessories contact us

This side is positive facing up
2. Fix the fan blade with screws

This side is positive facing up
3, fan blade up, aligned with the hole

4. Tighten the six screws of the fan blade

5. Plug in the light source interface

6, Correspond to the three light source slots, and then rotate the buckle

7, check whether it is fixed

8, Twist Open Day flower hanging board

9. Fixed ceiling hanging board

10 Install the safety hook on the mounting bracket.

## Accessories in the package for US customers

DC motor + Light Kit   Fan blade*3   Functional Instructions

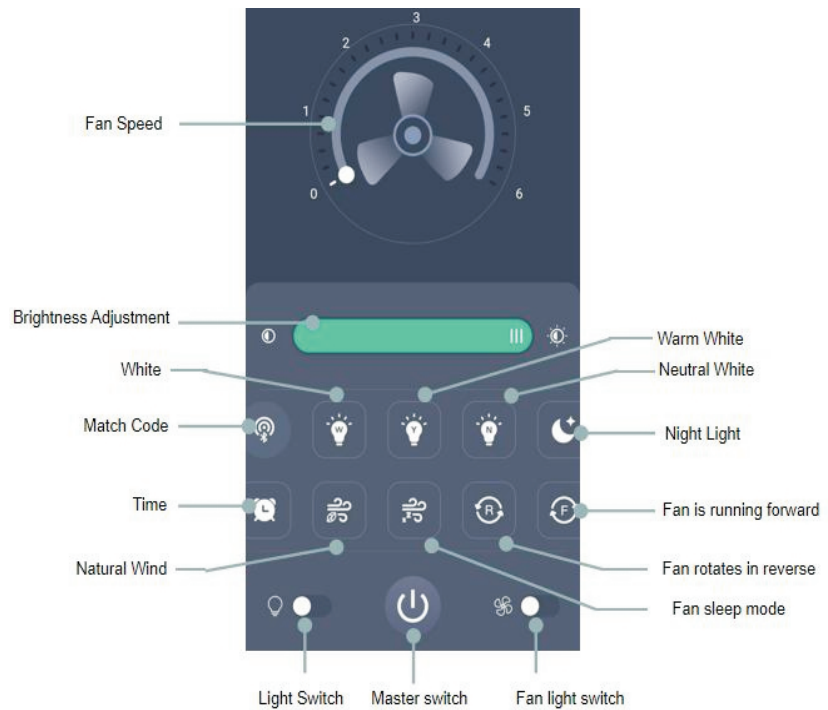Light source   Blind nuts*3   Flat head screws*5

Pointed screw*7   Expansion screw*6   Safety hook*1

Please check whether the accessories are complete, if there is anything missing, please contact us.

11, the knob is good and fixed a screw

Functional Instructions

- Fan Speed
- Brightness Adjustment
- White
- Match Code
- Time
- Natural Wind
- Warm White
- Neutral White
- Night Light
- Fan is running forward
- Fan rotates in reverse
- Fan sleep mode
- Light Switch
- Master switch
- Fan light switch

Download Smart Control APP
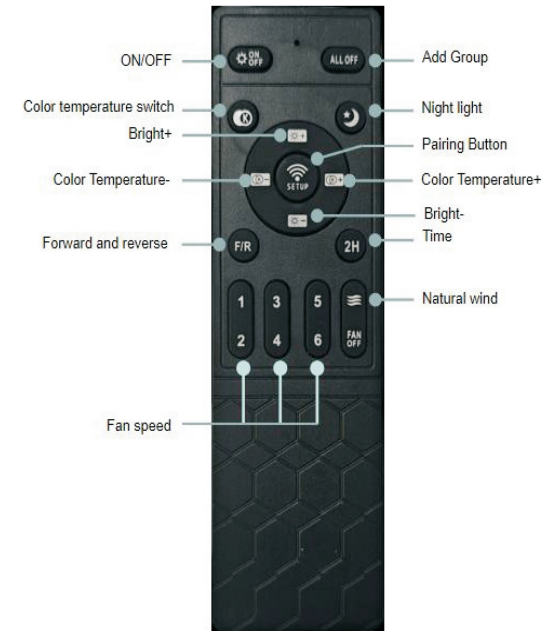Scan the QR Code Below

Support IOS and Android

APP and Lamp Pairing Methods
1. iPhone or Android/Huawei can be downloaded and automatically by scanning the QR code on the instructions.
2. iPhone can be downloaded directly by accessing APP STORE and searching Smart Light Control.
3. Android phones can be downloaded directly by entering the application market to search for Smart Light Control.
3. Huawei Mobile Phone can be downloaded directly by accessing APP Treasure and searching Intelligent Light Control.

Functional Instructions

- ON/OFF
- Color temperature switch
- Bright+
- Color Temperature-
- Forward and reverse
- Add Group
- Night light
- Pairing Button
- Color Temperature+
- Bright-
- Time
- Natural wind
- Fan speed

Press this button once in 10 seconds after the lamp has been powered on

After the lamp is electrified, press the SETUP key(code key) on the remotecontrol quickly in 10 seconds.The light flashes indicate the code is successful.Otherwise, turn off the total power supply of the lamp, and then re-operate this step until the light flashes and the alignment is successful.