


UPML 15-105 130, 25-105 130, 25-105 180 (N), 32-105 180 (GFJNB)

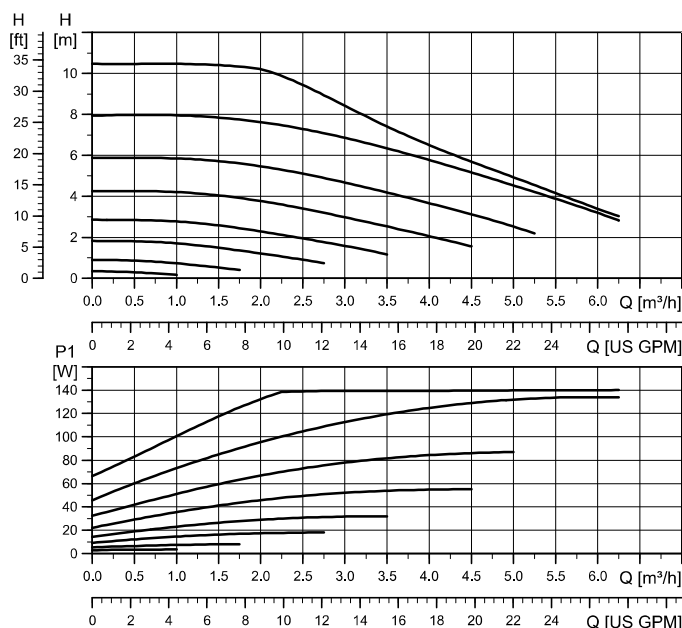

High Efficiency

EEI ≤ 0.23 Part 3


 $P_{L, avg} \leq 58 \text{ W}$

TM06 8326 0817

Electrical data, 1 x 230 V, 50/60 Hz

Speed	P_1 [W]	$I_{1/1}$ [A]
Min.	3	0.04
Max.	140	1.1

Dimensions

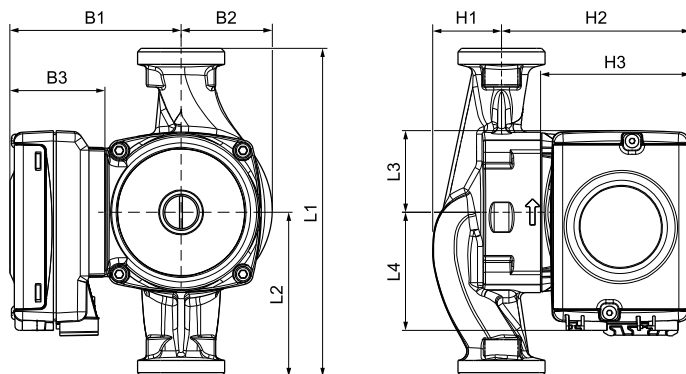

TM07 2013 2518

Pump type	Dimensions [mm]										Connections	Net weight [kg]
	L1	L2	L3	L4	B1	B2	B3	H1	H2	H3		
UPML 15-105 130	130	65	45	65	94	50	52	38	104	82	G 1	2.3
UPML 25-105 130	130	65	45	65	94	50	52	38	104	82	G 1 1/2	2.4
UPML 25-105 (N) 180	180	90	45	65	94	50	52	38	104	82	G 1 1/2	2.5
UPML 32-105 180	180	90	45	65	94	50	52	38	104	82	G 2	2.7

Technical data

System pressure:	Max. 1.0 MPa (10 bar)	Enclosure class:	IPX2D
Minimum inlet pressure:	0.01 MPa (0.10 bar) at 95 °C liquid temperature	Insulation class:	H
Liquid temperature:	-10 °C to +95 °C (TF 95)	Equipment class:	I
Motor protection:	Overload protection	Approval and marking:	VDE, CE