


LED DOWNLIGHT

Product&Family Code: 016 052 0030


STELLA-30

Technical Data

Voltage (V)	100-265V
Product Wattage (W)	30
Equivalence with incandescent lamp	240
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	6400K
Materials	PC + Aluminium
Protection Class	II
Dimmable	No
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	2850
Luminous Efficacy (lm/W)	95
Rated Life (hrs) ⌚	25.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	12.500

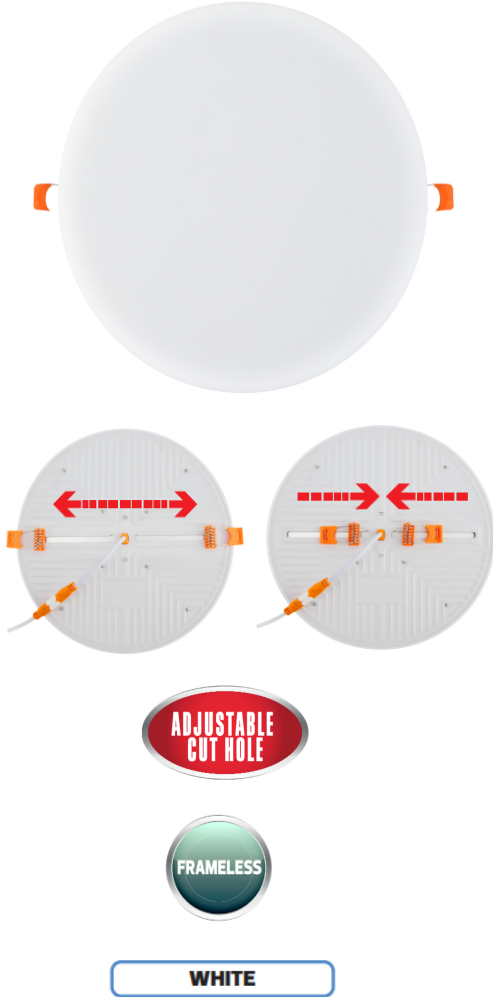

Technical Drawing



Applications

•Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

