



5ET

微型保险丝管(延时型)

SUB-MINIATURE FUSE-LINKS(TIME-LAG)

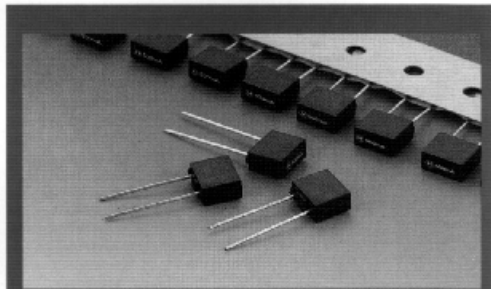

UNIT (单位) : mm



主体材料: 阻燃塑料, UL94-V0
MATERIALS: THERMOPLASTIC, UL94-V0

目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS						I ² T 参考值 REFERENCE (A ² .S)
			CCC	SEMKO	VDE	UR	CSA	PSE	
0080H	80mA	400	○	○	○	○	○		0.01
0100H	100mA	350	○	○	○	○	○		0.02
0125H	125mA	300	○	○	○	○	○		0.04
0160H	160mA	280	○	○	○	○	○		0.08
0200H	200mA	260	○	○	○	○	○		0.12
0250H	250mA	240	○	○	○	○	○		0.40
0315H	315mA	220	○	○	○	○	○		0.61
0400H	400mA	200	○	○	○	○	○		1.03
0500H	500mA	190	○	○	○	○	○		1.62
0630H	630mA	180	○	○	○	○	○		2.48
0800H	800mA	160	○	○	○	○	○		3.65
010H	1A	140	○	○	○	○	○	●	6.07
013H	1.25A	130	○	○	○	○	○	●	10.06
016H	1.6A	120	○	○	○	○	○	●	16
020H	2A	100	○	○	○	○	○	●	23.6
025H	2.5A	100	○	○	○	○	○	●	38
032H	3.15A	100	○	○	○	○	○	●	60
040H	4A	100	○	○	○	○	○	●	95
050H	5A	100	○	○	○	○	○	●	152
063H	6.3A	100	○	○	○	○	○	●	248


H DENOTES FOR 250V (H表示250V)

○ DENOTES FOR PENDING (○表示申请中)

● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE

电流-时间曲线图

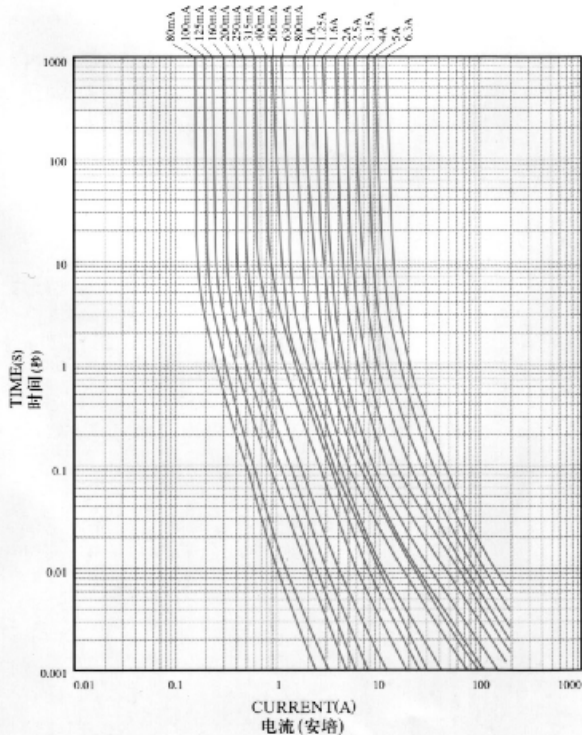

分断电流:

BREAKING CAPACITY:

CCC/SEMKO/VDE: 35A OR 10In WHICHEVER IS GREATER

UR/CSA/PSE: 100A 250V AC

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max (最慢)	2min
2.75In	Min (最快)	400ms
	Max (最慢)	10sec
4In	Min (最快)	150ms
	Max (最慢)	3sec
10In	Min (最快)	20ms
	Max (最慢)	150ms

