



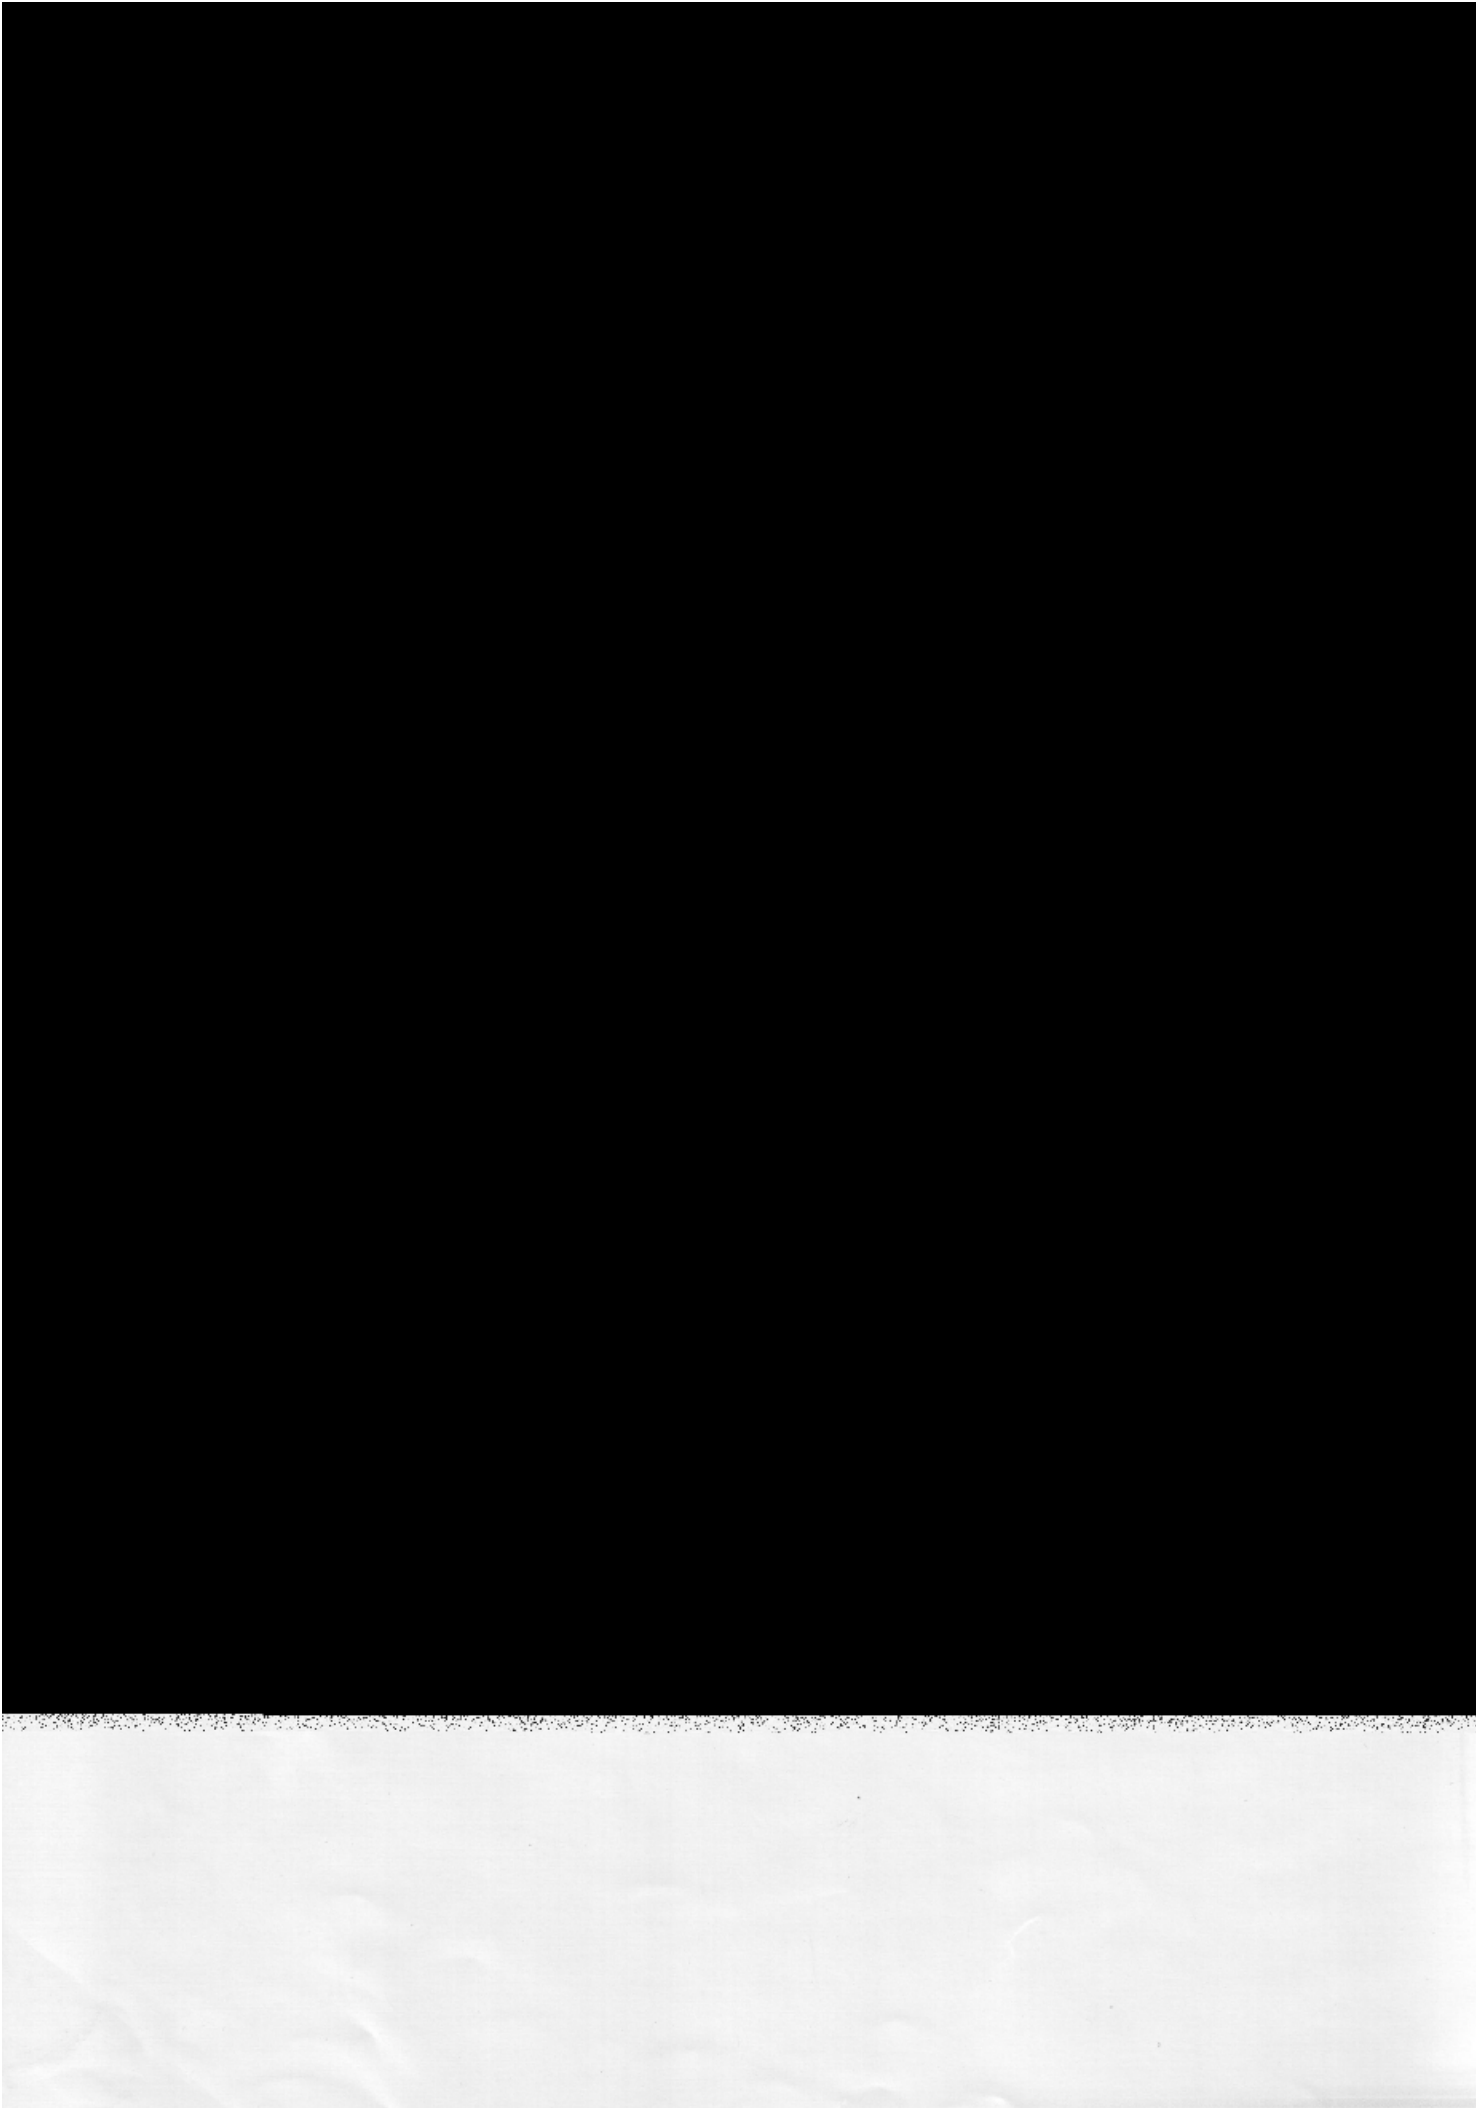


Insulation Resistance	Min. 100M Ω at 500VDC
Dielectric Strength	750VAC 50 HZ/60 HZ (1 minute)
Operate Time	Max. 10mSec.
Release Time	Max. 10mSec.
Ambient Temperature	-40 °C~+85 °C
Vibration Resistance (Endurance)	1.0mm D.A. 10-55HZ
Shock Resistance	Unerror 10G
Mechanical Life	1x 10 ⁷ operations (at no load)
Electrical Life	1x 10 ⁵ operations (at rated load)
Weight	Approx. 18g(Open), 22g(Sealed)

DIMENSIONS(mm)

Open Type (Nil)

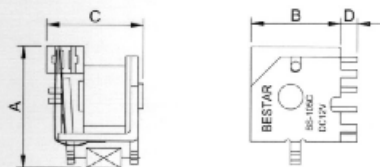

Sealed(S) & Dust Cover Type (C)

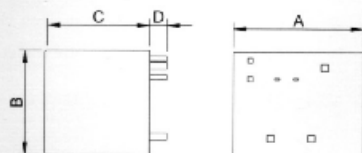


	Nil	C	S
A	24	26.5	26.5
B	20	22.5	22.5
C	18	21	21
D	4.0	3.5	3.5

General Tolerance ± 0.3

WIRING DIAGRAM

(Bottom View)

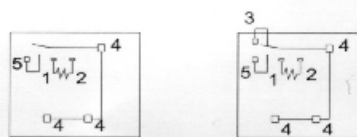


1 Form A

1 Form C

PC board pattern (mm)

(Bottom View)



	U.S.A Type			European Type		
	Nil	C	S	Nil	C	S
A		3.78			3.3	
B		11.89			12.1	
C		4.0			2.2	
D		8.2			11.0	
E		2.29			2.2	
F		5.35			5.8	
G		9.1			10.1	
H		14.8			15.9	

General Tolerance ± 0.1

Nil: Open Type

C: Dust Cover Type · S: Sealed Type