



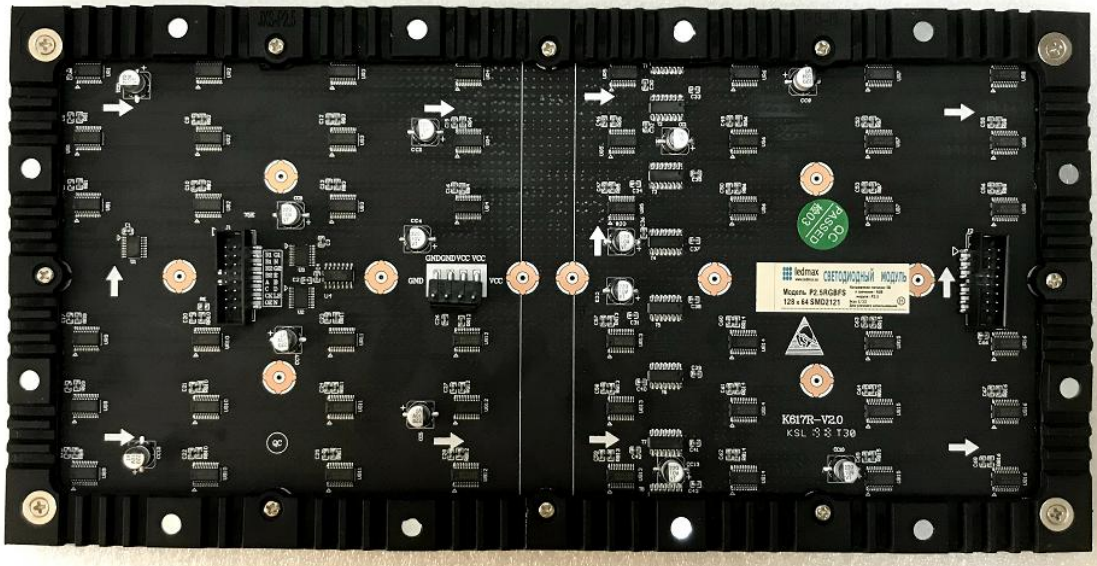

P1.86 INDOOR P SMD FLEXIBLE MODULE TECHNICAL PARAMETERS

Unit Module	Item	Parameter
	Model Number	P1.86 RGBFS 320X160 SMD1515 1/43S
	Module size	320mm*160mm
	Pixel pitch	1.86mm
	Pixels Density	289050dots/m2
	Pixel configuration	1R1G1B
	Package mode	SMD1212
	Pixel resolution	172dots(W)*86 dots(H)
	Brightness(cd)	≥700(cd)
	Max Power	25W
	Module thickness	11mm (without magnets)
	Weight	0.315kg
	Drive type	Constant drive
	Scan mode	1/43scan
	Port type	HUB75E

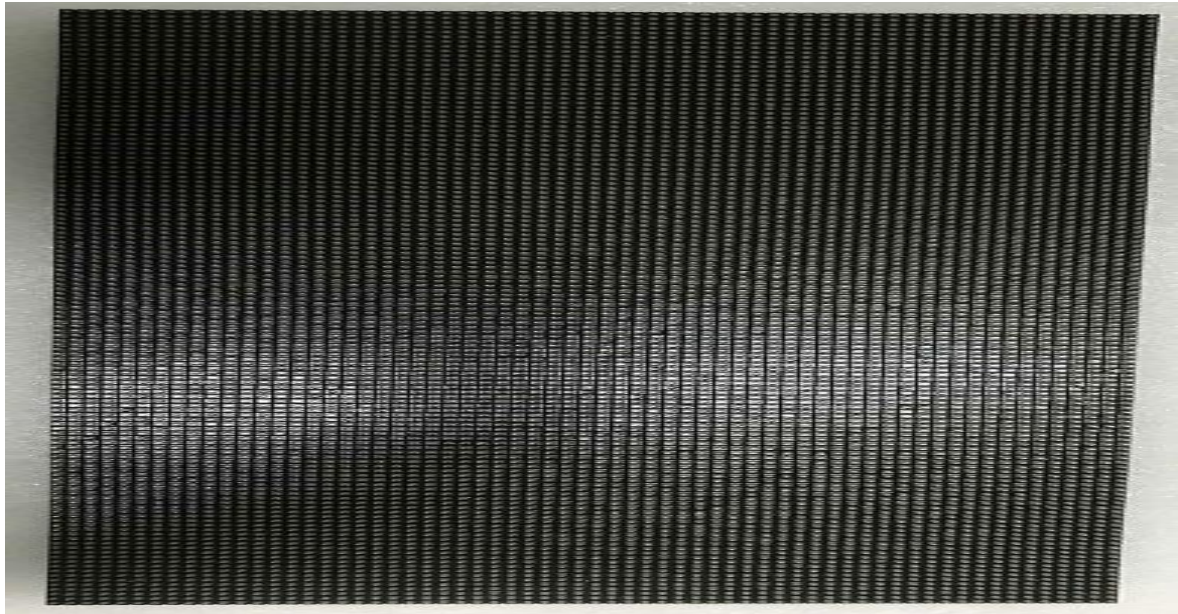

320mm*160mm

	Best viewing distance	3M~20M
	Best viewing angle	160°(W) 120°(H)
	Temperature	storage:-35°C~+85°C working:-20°C~+50°C

	Relative humidity	10%-95%
Power	Working voltage	AC220V±10%
	Average Power consumption	<200W/m ²
	Max.Power consumption	<700W/m ²
	Current	<18mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	>3840HZ
	Grey scale/colors	65536gray level/16.7M colors
	MTBF	>9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768