


06 Choose Time


Time Zone America/Los\_Angeles

America/Tijuana

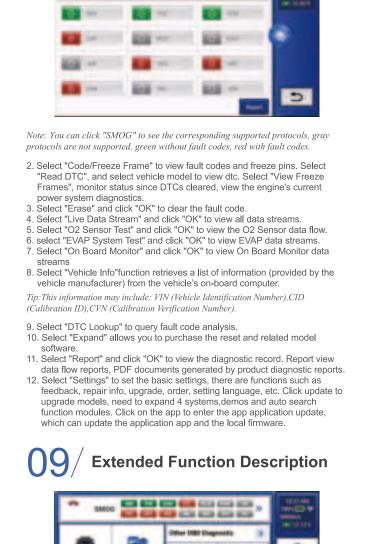


1.Plug in the OBD diagnostic cable after the car is turned on, and the device

will automatically scan for OBD protocols (wait while scanning).

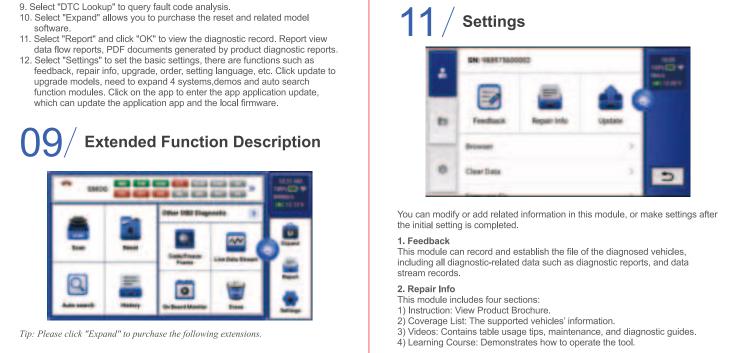

Scan: The module has a demo (demonstrates the diagnostic process) and model software.
 Reset: MUCAR CDE900 PRO has 28 common maintenance and reset functions (AIRFUEL, BLEED, AFS, ADBLUE, SUS, AIRBAG, BMS, BRAKE, COOLANT, DPF, EGR, ETS, GEAR, BOX, IMMO, INJEC, LANGUAGE, NOXSENSOR, ODO, OIL, SEAT, SAS, STOPSTART, SUN, TPMS, TRANSPORT, TYRE, WINDOW).
 Auto Search: Automatically scan the VIN of car models and the list of car models.
 History: This feature includes diagnostic logging.

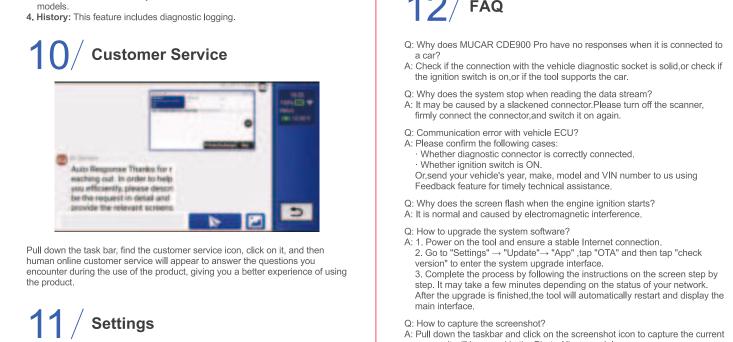

This warranty applies only to users and distributors who purchase MUCAR CDE900 Pro products through normal procedures. Provide free warranty within one year. MUCAR warranty including electronic products for damages caused by defects in materials or workmanship. Damages to the equipment or components caused by abusing, unauthorized modification, using for non-designed purposes, operation in a manner not specified in the instructions, etc.are not covered by this warranty. The compensation for dashboard damage caused by the defect of this equipment is limited to repair or replacement. MUCAR does not bear any indirect and incidental losses. MUCAR will judge the nature of the equipment damage according to its prescribed inspection methods.

Please contact Online Customers Service via the order interface.

Service Line: 1-909-757-1959
Customer Service Email: service@mucarco.com
Official Website: www.mucarco.com
Products tutorial, videos, FAQ and coverage list are available on MUCAR

screen, it will be saved in the Photo Album module.

Q: What should I do when it prompts that the network is unavailable?

A: Pull down the task bar, click the WIFI icon to connect to the available

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which

energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help
This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not

subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development

comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference; and (2) This device must accept any interference, including interference that may cause undesired operation of the device. The term "IC: " before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Industry Canada technical Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for MUCAR CDE900 Pro employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. \* Tests for SAR are conducted with the MUCAR CDE900 Pro transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the MUCAR CDE900 Pro while operating can be well below the maximum value. This is because the MUCAR CDE900 is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a MUCAR CDE900 Pro is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this MUCAR CDE900 Pro when tested for use worn on the body, as described in this user guide, is 0.25W/Kg (Body-worn measurements differ among MUCAR CDE900 Pro, depending upon available accessories and FCC requirements). While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement for safe exposure. The FCC has granted an Equipment Authorization for this MUCAR CDE900 Pro with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this MUCAR CDE900 Pro is on file with the FCC and can be found under the Display Grant section of http://www.fcc.gov/ oet/fccid after searching on FCC ID: 2AUAR900PRO Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) web-site at http://www.wow-com.com. \* In the United States and Canada, the SAR limit for MUCAR CDE900 Pro used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. The SAR test distance is 0mm.

Your MUCAR CDE900 Pro is a radio transmitter and receiver. It is

FCC SAR Information Statement

ISED SAR Information Statement Your MUCAR CDE900 Pro is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Innovation, Science and Economic Development Canada of the Canada Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless MUCAR CDE900 Pro employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the ISED is 1.6 W/kg. \* Tests for SAR are conducted with the MUCAR CDE900 Pro transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the MUCAR CDE900 Pro while operating can be well below the maximum value. This is because the MUCAR CDE900 Pro is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a MUCAR CDE900 Pro is available for sale to the public, it must be tested and certified to the ISED that it does not exceed the limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the ISED for each model. The highest SAR value for this MUCAR CDE900 Pro when tested for use worn on the body, as described in this user guide, is 0.25 W/Kg (Body-worn measurements differ among MUCAR CDE900 Pro, depending upon available accessories and ISED requirements). While there may be differences between the SAR levels of various MUCAR CDE900 Pro and at various positions, they all meet the government requirement for safe exposure. The ISED has granted an Equipment Authorization for this MUCAR CDE900 Pro with all reported SAR levels evaluated as in compliance with the ISED RF exposure guidelines. SAR information on this MUCAR CDE900 Pro is on file with the FCC and can be found under the Display Grant section of https://sms-sgs.ic.gc.ca/ after searching on IC: 26415-900PRO Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) web-site at http://www.wow-com.com. \* In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. The SAR test distance is 0mm.