

LED PROJECTOR




BLACK


WHITE



Technical Drawing

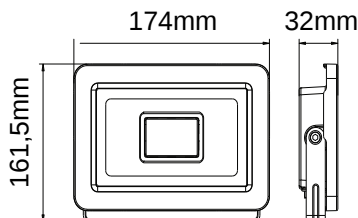

Photometric Diagram

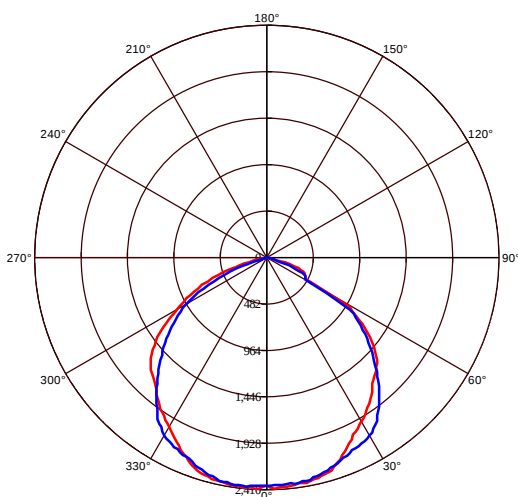

b C0 Plane beam angle(50%) **b C90 Plane beam angle(50%)**

C0 Plane beam angle(50%):111.8(DEG) C90 Plane beam angle(50%):107.9(DEG)

Istanbul Trakya Free Zone
Ferhatpasa S.B. Mah. Acelya Sk.
Dış Kapı: 2 İç Kapı: 301
Horozk Electric & Electronic Trade
Co. Catalca / Istanbul / Turkey

Product Code:

068 010 0050

ASLAN-50

Technical Data

Voltage (V)	175-250V
Product Wattage (W)	50
Equivalence with incandescent lamp(W)	400
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	2700K - 6400K - Green
Materials	Aluminium Die Casting Body
Protection Class	I
Dimmable	No
EEL	
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	5750
Luminous Efficacy (lm/W)	115
Rated Life (hrs) ⌚	30.000
IP Rating	65
Power Factor	>0.9
Beam Angle	100°
Starting Time	<0.2s
Number of ON-OFF cycling	x10.000

Applications

- Stadiums, Outdoor



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.



P.+90 (212) 786 62 20 (4
Line) F.+90 (212) 786 62 19
info@horozelektrik.com