


Product line FH 19

Mortice lock fire-retardant
for fire doors
according to DIN 18 250 Class 3



Classification code according to EN 12 209:

3	M	5	1	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

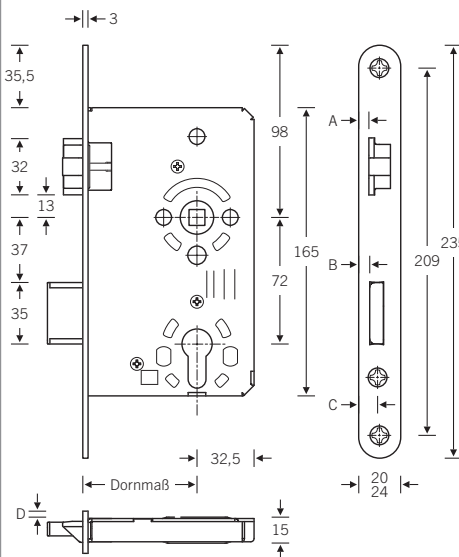

	Dimens. A	Dimens. B	Dimens. C	Dimens. D
18 mm	3,0	3,5	8,0	0,5
20 mm	3,4	3,9	8,5	1,0
24 mm	5,8	6,3	10,8	3,4

Mortice lock fire-retardant
Product line 19

FH
19

PZW double-turn with key operated

PZW

flat rounded:

FR

forend plate width:
– 20 / 24 mm

20

backsets:
– 55 / 65 mm

55

centres:
– PZ 72 mm

72

square follower size:
– 9 mm □

09

handing details:
– RH
– LH

RS

LS

forend design:
– Steel silver metallic

silb

Equipment

- Folded-type follower in galvanised steel
- latch and deadbolt in galvanised steel, with thermally bonded guide elements in polyamide for the purpose of damping sound from the lock and latchbolt

Options (please note delivery times)

- Flat forend with straight corners FK
- backset 60 mm* 60
- forend plate width 18 mm* 18
- forend variant:
 - Hammer-gilded lacquered steel gold
 - white lacquered steel white
 - stainless steel EST
 - galvanized steel VZ

*These variants are not covered by
DIN 18 250 and must not be accorded
the “Ü” quality kitemark.

Example for article identification:

FH 19 PZW FR 20 | 55 72 08 RS silb



