


本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

RoHS compliant

PANEL CUTOUT

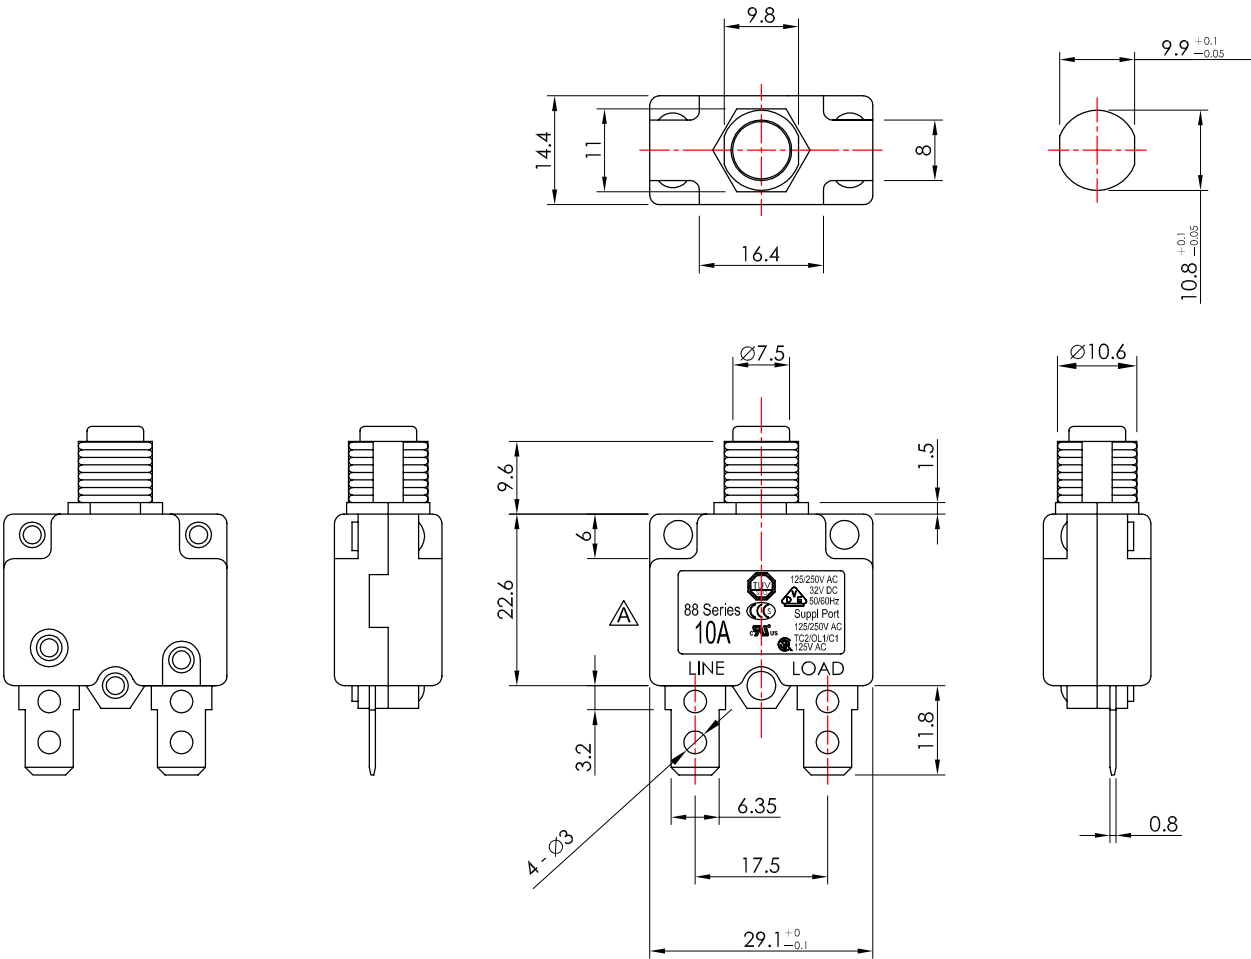

RoHS compliant

8800-XX-G

SPECIFICATION

Rating: 10A 125/250V AC.
Input power: 125/250V AC 50V DC 50/60Hz.
Interrupting capacity: 1,000A 125V AC.
Dielectric strength: 1,500V AC 1 minute.
Resettable overload capacity: 10 times rated current.
Voltage drop: Less than 0.25V.
Insulation resistance: 500MΩ.
Reset time: Within 60 sec temperature rise at.
Terminal block: Less than 65°C at 100% of rated current applied continuously at 25 °C.
Soldering temperature: 230°C Max for 3 sec.

RATING	
7	7A 125/250V AC
10	10A 125/250V AC
15	15A 125/250V AC
20	20A 125/250V AC



V2.1		外觀印字修正	2007.04.26
V2.0	無	新繪製	2006.09.01
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品 PRODUCT		Circuit Switch		型號 MODEL NO.	8800-10-G
比例 SCALE	1 : 1	單位 UNIT	mm	一綺電子企業股份有限公司 總公司：110 台北市信義路四段415號12樓之2 12F-2 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI (110), TAIWAN TEL : 886-2-27290229 (Rep.) FAX : 886-2-27582086 URL : http://www.switronic.com.tw E-MAIL : switches@ms36.hinet.net	
公差 TOLERANCE	.X=±0.3mm, .XX=±0.2mm				
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY			
Charlie Feng	Alex Lin	Margaret Lee			
SWITRONIC® INDUSTRIAL CORP. Switches				ISO 9001  Cert No. 041008741	