

KARTA PRODUKTU

Prowadnica kulkowa



DB/45 PUSH PERFECT




Układ otworów

Widok na boku korpusu



Długość
L [mm]

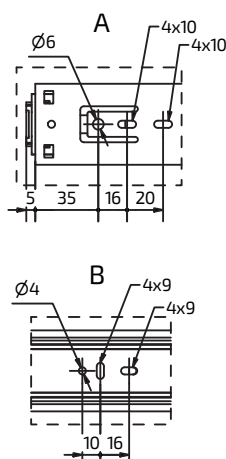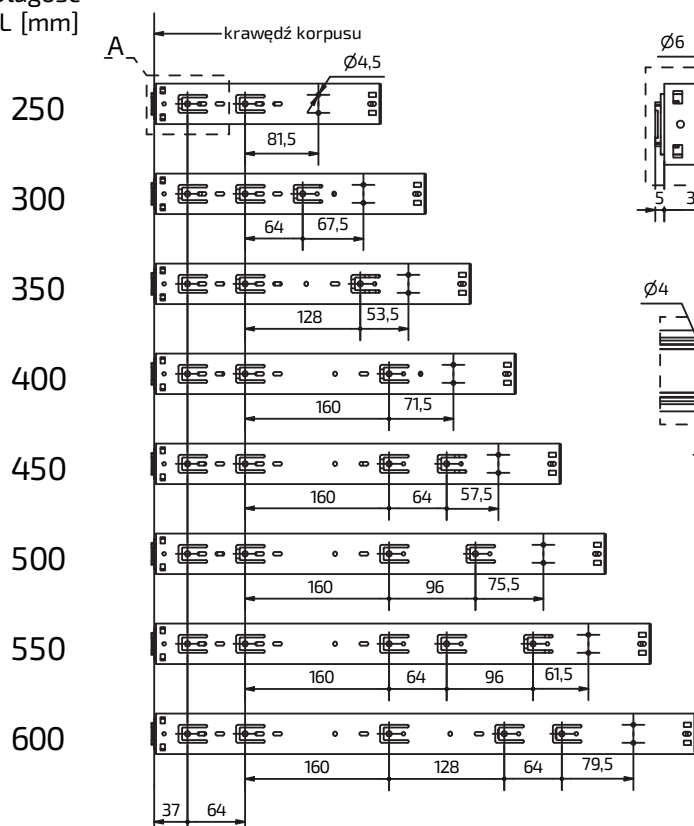

Widok na boku szuflady

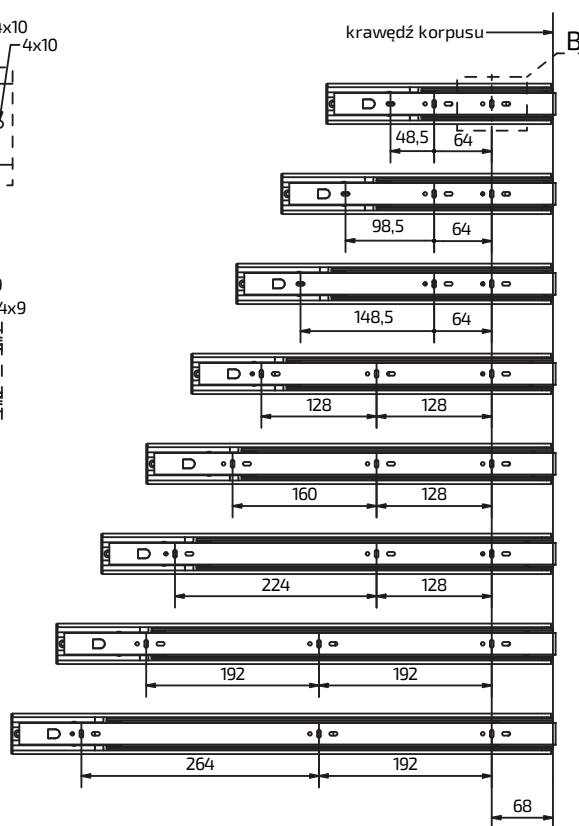

Wysuw

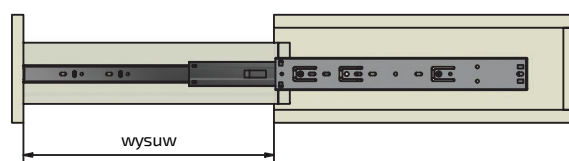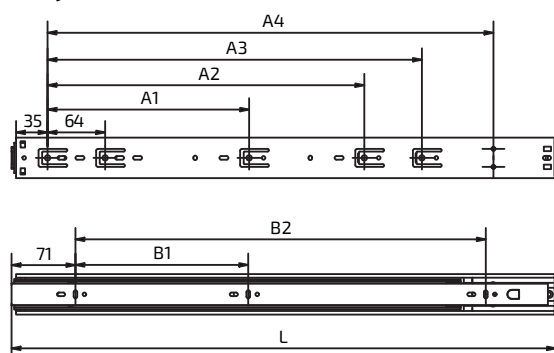

model	L [mm]	wysuw [mm]	A1	A2	A3	A4	B1	B2
DB/45 PUSH PERFECT - 250	250	205	-	-	-	145,5	64	112,5
DB/45 PUSH PERFECT- 300	300	300	-	-	128	195,5	64	162,5
DB/45 PUSH PERFECT- 350	350	350	-	-	192	245,5	64	212,5
DB/45 PUSH PERFECT- 400	400	393	-	-	224	295,5	128	256
DB/45 PUSH PERFECT- 450	450	430	224	-	288	345,5	128	288
DB/45 PUSH PERFECT- 500	500	500	224	-	320	395,5	128	352
DB/45 PUSH PERFECT- 550	550	550	224	288	384	445,5	192	384
DB/45 PUSH PERFECT- 600	600	600	224	352	416	495,5	192	456



KARTA PRODUKTU


Prowadnica kulkowa

DB/45 PUSH PERFECT




Wymiary montażowe

Widok szuflady od frontu

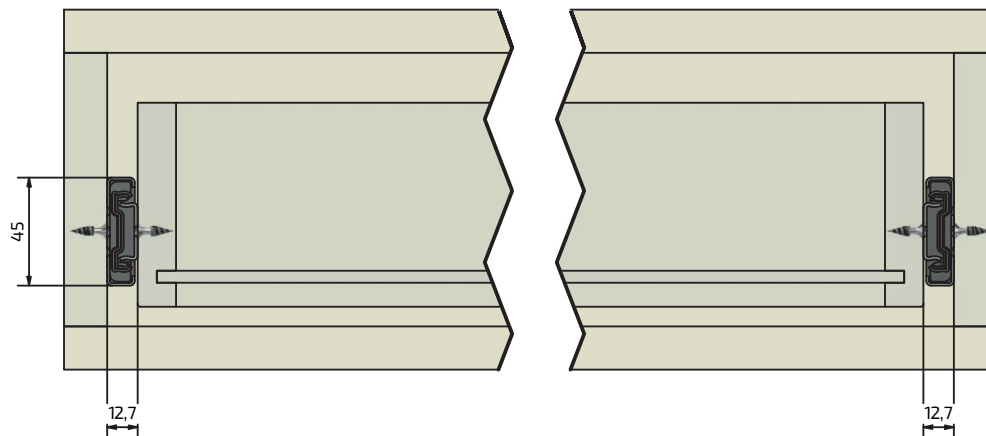

Widok szuflady od boku

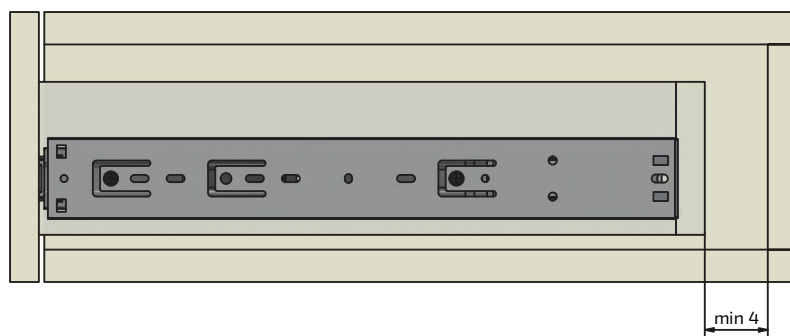

Montaż prowadnic do szuflady i korpusu

