


Zawór bezpieczeństwa HERZ

Arkusz
znormalizowany
1 26XX 0X
Wydanie 1213

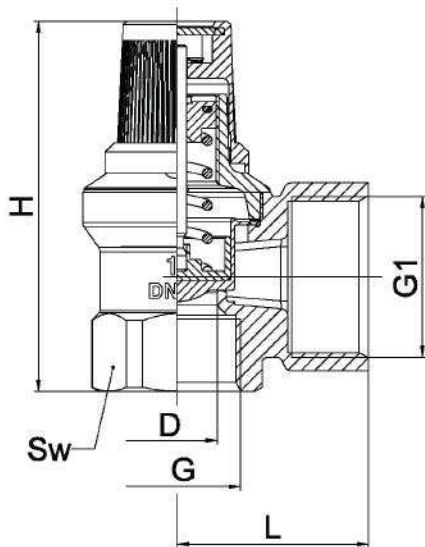

Model	DN	D	PN	G	G1	L	H	Sw	P	Q	α	kg
1 2611 01	15	14	2,5	1/2	3/4	32	72	27	75	1,6	0,147	0,178
1 2612 01	15	14	3,0	1/2	3/4	32	72	27	75	1,9	0,131	0,178
1 2613 01	15	14	6,0	1/2	3/4	32	72	27	75	5,1	0,219	0,178
1 2614 01	15	14	1,8	1/2	3/4	32	72	27	75	0,8	0,129	0,178
1 2615 01	15	14	4,0	1/2	3/4	32	72	27	75	1,1	0,220	0,172
1 2604 02	20	14	2,5	3/4	1	35	72	32	100	1	0,112	0,190
1 2605 02	20	14	3,0	3/4	1	35	72	32	100	1	0,100	0,190
1 2606 02	20	14	6,0	3/4	1	35	72	32	150	1	0,093	0,190
1 2607 03	25	21	2,5	1	1-1/4	50	97	41	200	1,2	0,056	0,563
1 2608 03	25	21	3,0	1	1-1/4	50	97	41	200	2,6	0,106	0,540
1 2667 03	25	21	6,0	1	1-1/4	50	97	41	200	2,4	0,053	0,562
1 2687 03	25	21	8,0	1	1-1/4	50	97	41	200	2,5	0,097	0,558
1 2609 04	32	21	2,5	1-1/4	1-1/2	52	97	50	350	2,2	0,057	0,728
1 2610 04	32	21	3,0	1-1/4	1-1/2	52	97	50	350	2,7	0,072	0,728
1 2669 04	32	21	6,0	1-1/4	1-1/2	52	97	50	350	/	/	0,728
1 2689 04	32	21	8,0	1-1/4	1-1/2	52	97	50	350	/	/	0,730

Wymiary
i specyfikacja

Maks. ciśnienie: patrz tabela
Zakres temperatur: 0 – 110 °C
Medium: woda (bez pary)

Korpus: mosiądz kuty zgodnie z EN 12420
Sprężyna: stal sprężynowa (ocynkowana)
Membrana: EPDM (kaczuk etylenowo-propylenowy)
Pokrętko: PA (poliamid)

Budowa

